

Scikit Discovery

Generated by Doxygen 1.8.13

Contents

1	Namespace Index	1
1.1	Packages	1
2	Hierarchical Index	5
2.1	Class Hierarchy	5
3	Class Index	7
3.1	Class List	7
4	File Index	11
4.1	File List	11
5	Namespace Documentation	13
5.1	skdiscovery Namespace Reference	13
5.2	skdiscovery.data_structure Namespace Reference	13
5.3	skdiscovery.data_structure.framework Namespace Reference	13
5.4	skdiscovery.data_structure.framework.base Namespace Reference	14
5.5	skdiscovery.data_structure.framework.config Namespace Reference	14
5.5.1	Function Documentation	14
5.5.1.1	getConfig()	14
5.5.1.2	getDispyPassword()	14
5.5.1.3	getHostName()	15
5.5.1.4	writeConfigValue()	15

5.6	skdiscovery.data_structure.framework.discoverypipeline Namespace Reference	15
5.7	skdiscovery.data_structure.framework.stagecontainers Namespace Reference	15
5.8	skdiscovery.data_structure.generic Namespace Reference	16
5.9	skdiscovery.data_structure.generic.accumulators Namespace Reference	16
5.10	skdiscovery.data_structure.generic.accumulators.data Namespace Reference	16
5.11	skdiscovery.data_structure.generic.accumulators.gpshplotter Namespace Reference	16
5.12	skdiscovery.data_structure.generic.accumulators.hcluster Namespace Reference	16
5.13	skdiscovery.data_structure.series Namespace Reference	16
5.14	skdiscovery.data_structure.series.accumulators Namespace Reference	17
5.15	skdiscovery.data_structure.series.accumulators.plotter Namespace Reference	17
5.16	skdiscovery.data_structure.series.analysis Namespace Reference	17
5.17	skdiscovery.data_structure.series.analysis.correlate Namespace Reference	17
5.18	skdiscovery.data_structure.series.analysis.gca Namespace Reference	17
5.19	skdiscovery.data_structure.series.analysis.mogi Namespace Reference	17
5.19.1	Function Documentation	18
5.19.1.1	MogiVectors()	18
5.20	skdiscovery.data_structure.series.filters Namespace Reference	18
5.21	skdiscovery.data_structure.series.filters.dataremover Namespace Reference	19
5.22	skdiscovery.data_structure.series.filters.hyperbolictan Namespace Reference	19
5.23	skdiscovery.data_structure.series.filters.interpolate Namespace Reference	19
5.24	skdiscovery.data_structure.series.filters.kalman Namespace Reference	19
5.25	skdiscovery.data_structure.series.filters.lowpass Namespace Reference	19
5.26	skdiscovery.data_structure.series.filters.median Namespace Reference	19
5.27	skdiscovery.data_structure.series.filters.offset_detrend Namespace Reference	20
5.28	skdiscovery.data_structure.series.filters.trend Namespace Reference	20
5.29	skdiscovery.data_structure.table Namespace Reference	20
5.30	skdiscovery.data_structure.table.accumulators Namespace Reference	20
5.31	skdiscovery.data_structure.table.accumulators.plotter Namespace Reference	20

5.32	skdiscovery.data_structure.table.analysis Namespace Reference	21
5.33	skdiscovery.data_structure.table.analysis.correlate Namespace Reference	21
5.34	skdiscovery.data_structure.table.analysis.dbscan Namespace Reference	21
5.35	skdiscovery.data_structure.table.analysis.gca Namespace Reference	21
5.36	skdiscovery.data_structure.table.analysis.midas Namespace Reference	21
5.37	skdiscovery.data_structure.table.analysis.mogi Namespace Reference	22
5.37.1	Function Documentation	22
5.37.1.1	MogiVectors()	22
5.38	skdiscovery.data_structure.table.analysis.outlier Namespace Reference	22
5.39	skdiscovery.data_structure.table.analysis.skew Namespace Reference	23
5.40	skdiscovery.data_structure.table.filters Namespace Reference	23
5.41	skdiscovery.data_structure.table.filters.antenna_offset Namespace Reference	23
5.42	skdiscovery.data_structure.table.filters.calibrate_grace Namespace Reference	23
5.43	skdiscovery.data_structure.table.filters.combine_columns Namespace Reference	24
5.44	skdiscovery.data_structure.table.filters.dataremover Namespace Reference	24
5.45	skdiscovery.data_structure.table.filters.geolocation Namespace Reference	24
5.46	skdiscovery.data_structure.table.filters.hyperbolictan Namespace Reference	24
5.47	skdiscovery.data_structure.table.filters.interpolate Namespace Reference	24
5.48	skdiscovery.data_structure.table.filters.kalman Namespace Reference	24
5.49	skdiscovery.data_structure.table.filters.lowpass Namespace Reference	25
5.50	skdiscovery.data_structure.table.filters.median Namespace Reference	25
5.51	skdiscovery.data_structure.table.filters.normalize Namespace Reference	25
5.52	skdiscovery.data_structure.table.filters.offset_detrend Namespace Reference	25
5.53	skdiscovery.data_structure.table.filters.propagate_nans Namespace Reference	25
5.54	skdiscovery.data_structure.table.filters.resample Namespace Reference	25
5.55	skdiscovery.data_structure.table.filters.snow_remover Namespace Reference	26
5.56	skdiscovery.data_structure.table.filters.stabilization Namespace Reference	26
5.57	skdiscovery.data_structure.table.filters.table_filter Namespace Reference	26

5.58 skdiscovery.data_structure.table.filters.trend Namespace Reference	26
5.59 skdiscovery.data_structure.table.filters.weighted_average Namespace Reference	26
5.60 skdiscovery.data_structure.table.fusion Namespace Reference	26
5.61 skdiscovery.data_structure.table.fusion.grace Namespace Reference	27
5.62 skdiscovery.data_structure.table.fusion.snow Namespace Reference	27
5.63 skdiscovery.data_structure.table.generators Namespace Reference	27
5.64 skdiscovery.data_structure.table.generators.catalog_generator Namespace Reference	27
5.65 skdiscovery.data_structure.table.generators.data_generator Namespace Reference	27
5.66 skdiscovery.utilities Namespace Reference	27
5.67 skdiscovery.utilities.cloud Namespace Reference	28
5.68 skdiscovery.utilities.cloud.amazon_control Namespace Reference	28
5.68.1 Function Documentation	29
5.68.1.1 clearAmazonList()	29
5.68.1.2 close()	29
5.68.1.3 closeDispyScheduler()	29
5.68.1.4 createTunnels()	30
5.68.1.5 generateInfo()	30
5.68.1.6 goodConnection()	30
5.68.1.7 init()	30
5.68.1.8 reset()	31
5.68.1.9 resetInstances()	31
5.68.1.10 setNumInstances()	31
5.68.1.11 startDispyNode()	32
5.68.1.12 startDispyScheduler()	32
5.68.1.13 updateIPAddress()	32
5.68.1.14 updateStatus()	32
5.68.2 Variable Documentation	33
5.68.2.1 amazon_list	33

5.68.2.2	aws_access_key	33
5.68.2.3	aws_key_name	33
5.68.2.4	aws_region	33
5.68.2.5	aws_secret	33
5.68.2.6	aws_security_group	33
5.68.2.7	ec2_client	34
5.68.2.8	ec2_res	34
5.68.2.9	pem_file	34
5.68.2.10	popen	34
5.68.2.11	scheduler	34
5.69	skdiscovery.utilities.cloud.amazon_gui Namespace Reference	34
5.69.1	Function Documentation	35
5.69.1.1	changeButtonState()	35
5.69.1.2	checkValidValues()	35
5.69.1.3	drawGUI()	35
5.69.1.4	init()	36
5.69.2	Variable Documentation	36
5.69.2.1	disable_list	36
5.69.2.2	initialized	36
5.69.2.3	initialized_disabled_list	36
5.69.2.4	key_value_list	36
5.69.2.5	widget_dict	37
5.70	skdiscovery.utilities.cloud.ssh_reverse Namespace Reference	37
5.70.1	Function Documentation	37
5.70.1.1	handler()	37
5.70.1.2	print_verbose()	38
5.70.1.3	reverse_forward_tunnel()	38
5.71	skdiscovery.utilities.patterns Namespace Reference	38

5.72	skdiscovery.utilities.patterns.astro_tools Namespace Reference	39
5.72.1	Function Documentation	39
5.72.1.1	abs_mag()	39
5.72.1.2	angular_separation()	40
5.72.1.3	app_mag()	40
5.72.1.4	cdf_dlf()	41
5.72.1.5	dlf()	41
5.72.1.6	inv_cdf_dlf()	42
5.72.1.7	lf()	43
5.72.1.8	move_point()	43
5.72.1.9	nfw()	44
5.72.1.10	v_to_z()	44
5.72.1.11	z_to_v()	45
5.73	skdiscovery.utilities.patterns.kalman_smoother Namespace Reference	45
5.73.1	Function Documentation	45
5.73.1.1	FitFOGMPParameters()	46
5.73.1.2	FOGM()	46
5.73.1.3	IterativeGridSearch()	47
5.73.1.4	KalmanFilter()	47
5.73.1.5	KalmanSmoother()	49
5.74	skdiscovery.utilities.patterns.pbo_tools Namespace Reference	50
5.74.1	Function Documentation	50
5.74.1.1	closed_pipe()	50
5.74.1.2	constant_open_pipe()	51
5.74.1.3	datetimeToNumber()	52
5.74.1.4	dirEigenvectors()	52
5.74.1.5	finite_sphere()	53
5.74.1.6	mogi()	53

5.74.1.7	rising_open_pipe()	54
5.74.1.8	sill()	54
5.75	skdiscovery.utilities.patterns.random_walks Namespace Reference	55
5.75.1	Function Documentation	55
5.75.1.1	gaussian_walk()	55
5.75.1.2	keep_in_bound()	56
5.75.1.3	uniform_walk()	56
5.76	skdiscovery.utilities.patterns.trend_tools Namespace Reference	57
5.76.1	Function Documentation	57
5.76.1.1	getTrend()	57
5.76.1.2	interpNaN()	57
5.76.1.3	medianFilter()	58
5.76.1.4	sinuFits()	58
5.77	skdiscovery.utilities.planetary Namespace Reference	59
5.78	skdiscovery.utilities.planetary.map_util Namespace Reference	59
5.78.1	Function Documentation	59
5.78.1.1	calc_slopes()	60
5.78.1.2	global_coords()	60
5.78.1.3	gps_to_pixel()	61
5.78.1.4	sanitize_latlon()	61
5.78.1.5	trim_map()	61
5.78.1.6	wgs84_distance()	62
5.79	skdiscovery.visualization Namespace Reference	63
5.80	skdiscovery.visualization.emd_plot Namespace Reference	63
5.80.1	Function Documentation	64
5.80.1.1	calc_imfs()	64
5.80.1.2	calc_imfs_sum()	64
5.80.1.3	plot_imfs()	65

5.80.1.4	plot_imfs_noise()	65
5.80.1.5	plot_imfs_split()	66
5.80.1.6	plot_imfs_split_comp()	67
5.80.1.7	run_plotImfs()	67
5.80.1.8	run_plotImfsNoise()	68
5.80.1.9	run_plotImfsSplit()	68
5.80.1.10	run_plotImfsSplitComp()	69
5.80.1.11	run_plotImfsSplitNoise()	70
5.81	skdiscovery.visualization.fourier_plot Namespace Reference	71
5.81.1	Function Documentation	71
5.81.1.1	calc_DFT()	71
5.81.1.2	plot_DFT()	71
5.81.1.3	run_plotDFT()	72
5.82	skdiscovery.visualization.linear_decomposition_plot Namespace Reference	72
5.82.1	Function Documentation	73
5.82.1.1	calc_lin_interp()	73
5.82.1.2	lin_trend()	73
5.82.1.3	plot_lin_interp()	74
5.82.1.4	plot_lin_slope()	74
5.82.1.5	plot_lin_trend()	75
5.83	skdiscovery.visualization.multi_ca_plot Namespace Reference	75
5.83.1	Function Documentation	75
5.83.1.1	multiCaPlot()	76
5.84	skdiscovery.visualization.multi_dist Namespace Reference	76
5.84.1	Function Documentation	76
5.84.1.1	calc_distance_map()	76
5.85	skdiscovery.visualization.spherical_voronoi Namespace Reference	77
5.85.1	Function Documentation	77

5.85.1.1	find_match()	78
5.85.1.2	getVoronoiCollection()	78
5.85.1.3	sphericalToXYZ()	79
5.85.1.4	xyzToSpherical()	79
5.86	skdiscovery.visualization.spiral_plot Namespace Reference	80
5.86.1	Function Documentation	80
5.86.1.1	plot_spiral()	80
5.86.1.2	run_spiral()	81
5.86.1.3	run_spiralInteractive()	81
5.87	skdiscovery.visualization.vis_utils Namespace Reference	82
5.87.1	Function Documentation	82
5.87.1.1	block_output()	82
5.87.1.2	enable_output()	82
5.87.1.3	index_scale()	82
5.87.1.4	lin_trend()	83
5.87.1.5	mod_data()	83
5.87.2	Variable Documentation	83
5.87.2.1	coldict	83
5.87.2.2	types	83
5.88	skdiscovery.visualization.wavelets_plot Namespace Reference	84
5.88.1	Function Documentation	84
5.88.1.1	calc_wp_deconstruct()	84
5.88.1.2	calc_wp_reconstruct()	84
5.88.1.3	plot_wp_deconstruct()	85
5.88.1.4	plot_wp_reconstruct()	85
5.88.1.5	plot_wp_showall()	85
5.88.1.6	run_plotWPDecon()	85
5.88.1.7	run_plotWPRecon()	86
5.88.1.8	run_plotWPShowall()	86

6	Class Documentation	87
6.1	skdiscovery.data_structure.table.filters.AntennaOffset Class Reference	87
6.1.1	Detailed Description	87
6.1.2	Constructor & Destructor Documentation	88
6.1.2.1	<code>__init__()</code>	88
6.1.3	Member Function Documentation	88
6.1.3.1	<code>process()</code>	88
6.1.4	Member Data Documentation	88
6.1.4.1	<code>antenna_data</code>	89
6.1.4.2	<code>column_list</code>	89
6.1.4.3	<code>min_diff</code>	89
6.2	skdiscovery.data_structure.table.filters.CalibrateGRACE Class Reference	89
6.2.1	Detailed Description	90
6.2.2	Constructor & Destructor Documentation	90
6.2.2.1	<code>__init__()</code>	90
6.2.3	Member Function Documentation	90
6.2.3.1	<code>__str__()</code>	90
6.2.3.2	<code>getMetadata()</code>	91
6.2.3.3	<code>perturbParams()</code>	91
6.2.3.4	<code>process()</code>	91
6.2.3.5	<code>resetParams()</code>	91
6.2.4	Member Data Documentation	92
6.2.4.1	<code>ap_paramList</code>	92
6.2.4.2	<code>ap_paramNames</code>	92
6.2.4.3	<code>ewd_column_name</code>	92
6.2.4.4	<code>round_dates</code>	92
6.2.4.5	<code>str_description</code>	92
6.3	skdiscovery.data_structure.table.generators.CatalogGenerator Class Reference	93

6.3.1	Detailed Description	93
6.3.2	Constructor & Destructor Documentation	93
6.3.2.1	__init__()	93
6.3.3	Member Function Documentation	94
6.3.3.1	inverse_nfw_cumulative()	94
6.3.3.2	nfw_cumulative()	94
6.3.3.3	output()	95
6.3.4	Member Data Documentation	95
6.3.4.1	background_density	95
6.3.4.2	dec1	95
6.3.4.3	dec2	95
6.3.4.4	ra1	95
6.3.4.5	ra2	96
6.3.4.6	z	96
6.4	skdiscovery.data_structure.table.filters.CombineColumns Class Reference	96
6.4.1	Detailed Description	97
6.4.2	Constructor & Destructor Documentation	97
6.4.2.1	__init__()	97
6.4.3	Member Function Documentation	97
6.4.3.1	__str__()	98
6.4.3.2	getMetadata()	98
6.4.3.3	perturbParams()	98
6.4.3.4	process()	98
6.4.3.5	resetParams()	99
6.4.4	Member Data Documentation	99
6.4.4.1	ap_paramList	99
6.4.4.2	ap_paramNames	99
6.4.4.3	column_1	99

6.4.4.4	column_2	99
6.4.4.5	new_column_name	99
6.4.4.6	str_description	100
6.5	skdiscovery.data_structure.table.analysis.Correlate Class Reference	100
6.5.1	Detailed Description	100
6.5.2	Constructor & Destructor Documentation	100
6.5.2.1	__init__()	100
6.5.3	Member Function Documentation	101
6.5.3.1	process()	101
6.5.4	Member Data Documentation	101
6.5.4.1	column_names	101
6.5.4.2	corr_type	101
6.5.4.3	local_match	102
6.6	skdiscovery.data_structure.series.analysis.Correlate Class Reference	102
6.6.1	Detailed Description	102
6.6.2	Constructor & Destructor Documentation	102
6.6.2.1	__init__()	102
6.6.3	Member Function Documentation	103
6.6.3.1	process()	103
6.6.4	Member Data Documentation	103
6.6.4.1	column_names	103
6.6.4.2	labels	103
6.7	skdiscovery.data_structure.generic.accumulators.DataAccumulator Class Reference	104
6.7.1	Detailed Description	104
6.7.2	Member Function Documentation	104
6.7.2.1	process()	104
6.8	skdiscovery.data_structure.table.generators.DataGenerator Class Reference	105
6.8.1	Detailed Description	105

6.8.2	Constructor & Destructor Documentation	105
6.8.2.1	__init__()	105
6.8.3	Member Function Documentation	106
6.8.3.1	output()	106
6.8.4	Member Data Documentation	106
6.8.4.1	args	106
6.8.4.2	final_function	106
6.8.4.3	length	106
6.8.4.4	seed	107
6.9	skdiscovery.data_structure.table.filters.DataRemover Class Reference	107
6.9.1	Detailed Description	107
6.9.2	Constructor & Destructor Documentation	107
6.9.2.1	__init__()	108
6.9.3	Member Function Documentation	108
6.9.3.1	process()	108
6.9.4	Member Data Documentation	108
6.9.4.1	column_names	108
6.9.4.2	end	109
6.9.4.3	labels	109
6.9.4.4	start	109
6.10	skdiscovery.data_structure.series.filters.DataRemover Class Reference	109
6.10.1	Detailed Description	110
6.10.2	Constructor & Destructor Documentation	110
6.10.2.1	__init__()	110
6.10.3	Member Function Documentation	110
6.10.3.1	process()	110
6.10.4	Member Data Documentation	111
6.10.4.1	column_names	111

6.10.4.2	end	111
6.10.4.3	labels	111
6.10.4.4	start	111
6.11	skdiscovery.data_structure.table.analysis.DBScan Class Reference	111
6.11.1	Detailed Description	112
6.11.2	Constructor & Destructor Documentation	112
6.11.2.1	__init__()	112
6.11.3	Member Function Documentation	112
6.11.3.1	process()	113
6.11.4	Member Data Documentation	113
6.11.4.1	column_names	113
6.12	skdiscovery.data_structure.framework.DiscoveryPipeline Class Reference	113
6.12.1	Detailed Description	114
6.12.2	Constructor & Destructor Documentation	114
6.12.2.1	__init__()	114
6.12.3	Member Function Documentation	115
6.12.3.1	__str__()	115
6.12.3.2	getMetadata()	115
6.12.3.3	getMetadataHistory()	115
6.12.3.4	getMetadataNestedGraph()	116
6.12.3.5	getMetadataNestedTypes()	116
6.12.3.6	getResults()	116
6.12.3.7	perturb()	117
6.12.3.8	perturbData()	117
6.12.3.9	plotPipelineInstance()	117
6.12.3.10	plotPipelineStructure()	117
6.12.3.11	reset()	118
6.12.3.12	resultIter()	118

6.12.3.13 run()	118
6.12.4 Member Data Documentation	119
6.12.4.1 data_fetcher	119
6.12.4.2 RA_results	119
6.12.4.3 stage_containers	119
6.12.4.4 stageConfigurationHistory	119
6.13 skdiscovery.data_structure.series.analysis.General_Component_Analysis Class Reference	119
6.13.1 Detailed Description	120
6.13.2 Constructor & Destructor Documentation	120
6.13.2.1 __init__()	120
6.13.3 Member Function Documentation	121
6.13.3.1 process()	121
6.13.4 Member Data Documentation	121
6.13.4.1 ap_paramList	121
6.13.4.2 ap_paramNames	121
6.13.4.3 results	121
6.13.4.4 str_description	122
6.14 skdiscovery.data_structure.table.analysis.General_Component_Analysis Class Reference	122
6.14.1 Detailed Description	122
6.14.2 Constructor & Destructor Documentation	123
6.14.2.1 __init__()	123
6.14.3 Member Function Documentation	123
6.14.3.1 process()	123
6.14.4 Member Data Documentation	124
6.14.4.1 ap_paramList	124
6.14.4.2 ap_paramNames	124
6.14.4.3 column_names	124
6.14.4.4 n_components	124

6.14.4.5	results	124
6.14.4.6	str_description	124
6.15	skdiscovery.data_structure.table.filters.GeoLocationFilter Class Reference	125
6.15.1	Detailed Description	125
6.15.2	Constructor & Destructor Documentation	125
6.15.2.1	__init__()	125
6.15.3	Member Function Documentation	126
6.15.3.1	__str__()	126
6.15.3.2	getMetadata()	126
6.15.3.3	perturbParams()	126
6.15.3.4	process()	126
6.15.3.5	resetParams()	127
6.15.4	Member Data Documentation	127
6.15.4.1	ap_paramList	127
6.15.4.2	ap_paramNames	127
6.15.4.3	str_description	127
6.16	skdiscovery.data_structure.generic.accumulators.GPSHPlotter Class Reference	128
6.16.1	Detailed Description	128
6.16.2	Constructor & Destructor Documentation	128
6.16.2.1	__init__()	129
6.16.3	Member Function Documentation	129
6.16.3.1	process()	129
6.16.4	Member Data Documentation	130
6.16.4.1	comp_name	130
6.16.4.2	dir_sign	130
6.16.4.3	errorE	130
6.16.4.4	KF_tau	130
6.16.4.5	mogi_name	130

6.16.4.6	offset	130
6.16.4.7	pca_comp	131
6.16.4.8	pca_dir	131
6.16.4.9	scaleFactor	131
6.17	skdiscovery.data_structure.table.fusion.GraceFusion Class Reference	131
6.17.1	Detailed Description	132
6.17.2	Constructor & Destructor Documentation	132
6.17.2.1	__init__()	132
6.17.3	Member Function Documentation	132
6.17.3.1	__str__()	133
6.17.3.2	getMetadata()	133
6.17.3.3	perturbParams()	133
6.17.3.4	process()	133
6.17.3.5	resetParams()	134
6.17.4	Member Data Documentation	134
6.17.4.1	ap_paramList	134
6.17.4.2	ap_paramNames	134
6.17.4.3	column_data_name	134
6.17.4.4	column_error_name	134
6.17.4.5	gldas	134
6.17.4.6	metadata	135
6.17.4.7	str_description	135
6.18	skdiscovery.data_structure.generic.accumulators.HCluster Class Reference	135
6.18.1	Detailed Description	135
6.18.2	Constructor & Destructor Documentation	136
6.18.2.1	__init__()	136
6.18.3	Member Function Documentation	136
6.18.3.1	process()	136

6.18.4	Member Data Documentation	136
6.18.4.1	obj_name	136
6.19	skdiscovery.data_structure.table.filters.HTanFilter Class Reference	137
6.19.1	Detailed Description	137
6.19.2	Constructor & Destructor Documentation	137
6.19.2.1	__init__()	138
6.19.3	Member Function Documentation	138
6.19.3.1	process()	138
6.19.4	Member Data Documentation	139
6.19.4.1	a	139
6.19.4.2	c	139
6.19.4.3	column_names	139
6.19.4.4	end	139
6.19.4.5	end_time_limit	139
6.19.4.6	labels	140
6.19.4.7	offset	140
6.19.4.8	slope	140
6.19.4.9	start	140
6.19.4.10	start_time_limit	140
6.19.4.11	t0	140
6.20	skdiscovery.data_structure.series.filters.HTanFilter Class Reference	141
6.20.1	Detailed Description	141
6.20.2	Constructor & Destructor Documentation	141
6.20.2.1	__init__()	142
6.20.3	Member Function Documentation	142
6.20.3.1	process()	142
6.20.4	Member Data Documentation	143
6.20.4.1	a	143

6.20.4.2	c	143
6.20.4.3	column_names	143
6.20.4.4	end	143
6.20.4.5	end_time_limit	143
6.20.4.6	labels	144
6.20.4.7	offset	144
6.20.4.8	slope	144
6.20.4.9	start	144
6.20.4.10	start_time_limit	144
6.20.4.11	t0	144
6.21	skdiscovery.data_structure.table.filters.InterpolateFilter Class Reference	145
6.21.1	Detailed Description	145
6.21.2	Member Function Documentation	145
6.21.2.1	process()	145
6.22	skdiscovery.data_structure.series.filters.InterpolateFilter Class Reference	146
6.22.1	Detailed Description	146
6.22.2	Member Function Documentation	146
6.22.2.1	process()	146
6.23	skdiscovery.data_structure.series.filters.KalmanFilter Class Reference	147
6.23.1	Detailed Description	147
6.23.2	Constructor & Destructor Documentation	147
6.23.2.1	__init__()	147
6.23.3	Member Function Documentation	148
6.23.3.1	process()	148
6.23.4	Member Data Documentation	148
6.23.4.1	ap_paramNames	148
6.23.4.2	uncertainty_clip	148
6.24	skdiscovery.data_structure.table.filters.KalmanFilter Class Reference	149

6.24.1 Detailed Description	149
6.24.2 Constructor & Destructor Documentation	149
6.24.2.1 __init__()	149
6.24.3 Member Function Documentation	150
6.24.3.1 process()	150
6.24.4 Member Data Documentation	150
6.24.4.1 ap_paramNames	150
6.24.4.2 column_names	150
6.24.4.3 error_column_names	151
6.24.4.4 fillna	151
6.24.4.5 uncertainty_clip	151
6.25 skdiscovery.data_structure.series.filters.LowPassFilter Class Reference	151
6.25.1 Detailed Description	152
6.25.2 Constructor & Destructor Documentation	152
6.25.2.1 __init__()	152
6.25.3 Member Function Documentation	152
6.25.3.1 process()	152
6.25.4 Member Data Documentation	153
6.25.4.1 ap_paramNames	153
6.26 skdiscovery.data_structure.table.filters.LowPassFilter Class Reference	153
6.26.1 Detailed Description	153
6.26.2 Constructor & Destructor Documentation	153
6.26.2.1 __init__()	153
6.26.3 Member Function Documentation	154
6.26.3.1 process()	154
6.26.4 Member Data Documentation	154
6.26.4.1 ap_paramNames	154
6.27 skdiscovery.data_structure.series.filters.MedianFilter Class Reference	155

6.27.1 Detailed Description	155
6.27.2 Constructor & Destructor Documentation	155
6.27.2.1 __init__()	155
6.27.3 Member Function Documentation	156
6.27.3.1 process()	156
6.27.4 Member Data Documentation	156
6.27.4.1 ap_paramNames	156
6.27.4.2 interpolate	156
6.27.4.3 subtract	157
6.28 skdiscovery.data_structure.table.filters.MedianFilter Class Reference	157
6.28.1 Detailed Description	157
6.28.2 Constructor & Destructor Documentation	157
6.28.2.1 __init__()	158
6.28.3 Member Function Documentation	158
6.28.3.1 process()	158
6.28.4 Member Data Documentation	158
6.28.4.1 ap_paramNames	159
6.28.4.2 interpolate	159
6.28.4.3 min_periods	159
6.28.4.4 regular_period	159
6.28.4.5 subtract	159
6.29 skdiscovery.data_structure.table.analysis.MIDAS Class Reference	159
6.29.1 Detailed Description	160
6.29.2 Constructor & Destructor Documentation	160
6.29.2.1 __init__()	160
6.29.3 Member Function Documentation	161
6.29.3.1 __str__()	161
6.29.3.2 getMetadata()	161

6.29.3.3	perturbParams()	161
6.29.3.4	process()	161
6.29.3.5	resetParams()	162
6.29.4	Member Data Documentation	162
6.29.4.1	ap_paramList	162
6.29.4.2	ap_paramNames	162
6.29.4.3	column_names	162
6.29.4.4	str_description	162
6.30	skdiscovery.data_structure.series.analysis.Mogi_Inversion Class Reference	163
6.30.1	Detailed Description	163
6.30.2	Constructor & Destructor Documentation	163
6.30.2.1	__init__()	163
6.30.3	Member Function Documentation	164
6.30.3.1	FitPCA()	164
6.30.3.2	FitTimeSeries()	164
6.30.3.3	process()	165
6.30.4	Member Data Documentation	165
6.30.4.1	ap_paramNames	165
6.31	skdiscovery.data_structure.table.analysis.Mogi_Inversion Class Reference	166
6.31.1	Detailed Description	166
6.31.2	Constructor & Destructor Documentation	166
6.31.2.1	__init__()	166
6.31.3	Member Function Documentation	167
6.31.3.1	FitPCA()	167
6.31.3.2	FitTimeSeries()	167
6.31.3.3	process()	168
6.31.4	Member Data Documentation	168
6.31.4.1	ap_paramNames	168

6.31.4.2	column_names	168
6.31.4.3	pca_name	169
6.32	skdiscovery.data_structure.table.filters.NormalizeFilter Class Reference	169
6.32.1	Detailed Description	169
6.32.2	Constructor & Destructor Documentation	169
6.32.2.1	__init__()	169
6.32.3	Member Function Documentation	170
6.32.3.1	process()	170
6.32.4	Member Data Documentation	170
6.32.4.1	column	170
6.32.4.2	group_column	170
6.33	skdiscovery.data_structure.series.filters.OffsetDetrend Class Reference	171
6.33.1	Detailed Description	171
6.33.2	Constructor & Destructor Documentation	171
6.33.2.1	__init__()	172
6.33.3	Member Function Documentation	173
6.33.3.1	process()	173
6.33.4	Member Data Documentation	173
6.33.4.1	ap_paramNames	173
6.33.4.2	column_names	173
6.33.4.3	labels	174
6.33.4.4	time_interval	174
6.33.4.5	time_point	174
6.34	skdiscovery.data_structure.table.filters.OffsetDetrend Class Reference	174
6.34.1	Detailed Description	175
6.34.2	Constructor & Destructor Documentation	175
6.34.2.1	__init__()	175
6.34.3	Member Function Documentation	176

6.34.3.1	process()	176
6.34.4	Member Data Documentation	176
6.34.4.1	ap_paramNames	176
6.34.4.2	column_names	176
6.34.4.3	labels	176
6.34.4.4	time_interval	176
6.34.4.5	time_point	177
6.35	skdiscovery.data_structure.table.analysis.Outlier Class Reference	177
6.35.1	Detailed Description	177
6.35.2	Constructor & Destructor Documentation	177
6.35.2.1	__init__()	177
6.35.3	Member Function Documentation	178
6.35.3.1	process()	178
6.35.4	Member Data Documentation	178
6.35.4.1	columns	178
6.35.4.2	name_prefix	178
6.36	skdiscovery.data_structure.framework.PipelineItem Class Reference	179
6.36.1	Detailed Description	180
6.36.2	Constructor & Destructor Documentation	180
6.36.2.1	__init__()	180
6.36.3	Member Function Documentation	180
6.36.3.1	__str__()	180
6.36.3.2	getMetadata()	181
6.36.3.3	perturbParams()	181
6.36.3.4	process()	181
6.36.3.5	resetParams()	181
6.36.4	Member Data Documentation	181
6.36.4.1	ap_paramList	182

6.36.4.2	ap_paramNames	182
6.36.4.3	str_description	182
6.37	skdiscovery.utilities.planetary.map_util.Planet Class Reference	182
6.37.1	Detailed Description	183
6.37.2	Constructor & Destructor Documentation	183
6.37.2.1	__init__()	183
6.37.3	Member Function Documentation	183
6.37.3.1	get_lateraldist()	183
6.37.3.2	get_lateraldist_array()	184
6.37.3.3	get_medialdist()	184
6.37.4	Member Data Documentation	184
6.37.4.1	a	185
6.37.4.2	avg_radius	185
6.37.4.3	b	185
6.37.4.4	e_sq	185
6.37.4.5	equator_1deg	185
6.38	skdiscovery.data_structure.series.accumulators.Plotter Class Reference	185
6.38.1	Detailed Description	186
6.38.2	Constructor & Destructor Documentation	186
6.38.2.1	__init__()	186
6.38.3	Member Function Documentation	187
6.38.3.1	process()	187
6.38.4	Member Data Documentation	187
6.38.4.1	errorbars	187
6.38.4.2	height	187
6.38.4.3	kwargs	187
6.38.4.4	num_columns	187
6.38.4.5	width	188

6.39	skdiscovery.data_structure.table.accumulators.Plotter Class Reference	188
6.39.1	Detailed Description	189
6.39.2	Constructor & Destructor Documentation	189
6.39.2.1	__init__()	189
6.39.3	Member Function Documentation	189
6.39.3.1	process()	190
6.39.4	Member Data Documentation	190
6.39.4.1	annotate_column	190
6.39.4.2	annotate_data	190
6.39.4.3	column_names	190
6.39.4.4	columns_together	190
6.39.4.5	error_column_names	191
6.39.4.6	height	191
6.39.4.7	kwargs	191
6.39.4.8	num_columns	191
6.39.4.9	width	191
6.39.4.10	xlim	191
6.39.4.11	ylim	191
6.40	skdiscovery.data_structure.table.filters.PropagateNaNs Class Reference	192
6.40.1	Detailed Description	192
6.40.2	Constructor & Destructor Documentation	192
6.40.2.1	__init__()	193
6.40.3	Member Function Documentation	193
6.40.3.1	__str__()	193
6.40.3.2	getMetadata()	193
6.40.3.3	perturbParams()	194
6.40.3.4	process()	194
6.40.3.5	resetParams()	194

6.40.4	Member Data Documentation	194
6.40.4.1	ap_paramList	194
6.40.4.2	ap_paramNames	194
6.40.4.3	nan_column	195
6.40.4.4	str_description	195
6.40.4.5	target_columns	195
6.41	skdiscovery.data_structure.table.filters.Resample Class Reference	195
6.41.1	Detailed Description	196
6.41.2	Constructor & Destructor Documentation	196
6.41.2.1	__init__()	196
6.41.3	Member Function Documentation	196
6.41.3.1	__str__()	196
6.41.3.2	getMetadata()	197
6.41.3.3	perturbParams()	197
6.41.3.4	process()	197
6.41.3.5	resetParams()	197
6.41.4	Member Data Documentation	198
6.41.4.1	ap_paramList	198
6.41.4.2	ap_paramNames	198
6.41.4.3	end_date	198
6.41.4.4	frequency	198
6.41.4.5	start_date	198
6.41.4.6	str_description	198
6.42	skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel Class Reference	199
6.42.1	Detailed Description	199
6.42.2	Constructor & Destructor Documentation	199
6.42.2.1	__init__()	200
6.42.2.2	__del__()	200

6.42.3	Member Function Documentation	200
6.42.3.1	create_reverse_tunnel()	200
6.42.4	Member Data Documentation	201
6.42.4.1	check	201
6.42.4.2	child_threads	201
6.42.4.3	event	201
6.42.4.4	key_filename	201
6.42.4.5	remote_host	201
6.42.4.6	remote_port	201
6.42.4.7	server_address	202
6.42.4.8	server_port	202
6.42.4.9	ssh	202
6.42.4.10	username	202
6.42.4.11	verbose	202
6.43	skdiscovery.data_structure.table.analysis.Skew Class Reference	202
6.43.1	Detailed Description	203
6.43.2	Member Function Documentation	203
6.43.2.1	process()	203
6.44	skdiscovery.data_structure.table.fusion.SnowFusion Class Reference	203
6.44.1	Detailed Description	204
6.44.2	Constructor & Destructor Documentation	204
6.44.2.1	__init__()	204
6.44.3	Member Function Documentation	205
6.44.3.1	__str__()	205
6.44.3.2	getMetadata()	205
6.44.3.3	perturbParams()	205
6.44.3.4	process()	205
6.44.3.5	resetParams()	206

6.44.4	Member Data Documentation	206
6.44.4.1	ap_paramList	206
6.44.4.2	ap_paramNames	206
6.44.4.3	column_data_name	206
6.44.4.4	metadata	206
6.44.4.5	str_description	207
6.45	skdiscovery.data_structure.table.filters.SnowRemover Class Reference	207
6.45.1	Detailed Description	207
6.45.2	Constructor & Destructor Documentation	207
6.45.2.1	__init__()	207
6.45.3	Member Function Documentation	208
6.45.3.1	process()	208
6.45.4	Member Data Documentation	208
6.45.4.1	column_name	208
6.45.4.2	snow_column	208
6.46	skdiscovery.data_structure.table.filters.StabilizationFilter Class Reference	209
6.46.1	Detailed Description	209
6.46.2	Member Function Documentation	209
6.46.2.1	__str__()	210
6.46.2.2	getMetadata()	210
6.46.2.3	perturbParams()	210
6.46.2.4	process()	210
6.46.2.5	resetParams()	211
6.46.3	Member Data Documentation	211
6.46.3.1	ap_paramList	211
6.46.3.2	ap_paramNames	211
6.46.3.3	str_description	211
6.47	skdiscovery.data_structure.framework.StageContainer Class Reference	211

6.47.1 Detailed Description	212
6.47.2 Constructor & Destructor Documentation	212
6.47.2.1 <code>__init__()</code>	212
6.47.3 Member Function Documentation	213
6.47.3.1 <code>getMetadata()</code>	213
6.47.3.2 <code>getMetadataNestedGraph()</code>	213
6.47.3.3 <code>getMetadataNestedTypes()</code>	213
6.47.3.4 <code>getMetadataType()</code>	214
6.47.3.5 <code>getObjects()</code>	214
6.47.3.6 <code>perturb()</code>	214
6.47.3.7 <code>reset()</code>	214
6.47.3.8 <code>run()</code>	214
6.47.4 Member Data Documentation	215
6.47.4.1 <code>obj_content</code>	215
6.47.4.2 <code>perturbmethod</code>	215
6.47.4.3 <code>resetmethod</code>	215
6.47.4.4 <code>runmethod</code>	215
6.48 <code>skdiscovery.data_structure.framework.StageContainerAlternative</code> Class Reference	215
6.48.1 Detailed Description	216
6.48.2 Constructor & Destructor Documentation	216
6.48.2.1 <code>__init__()</code>	216
6.48.3 Member Function Documentation	217
6.48.3.1 <code>getMetadata()</code>	217
6.48.3.2 <code>getMetadataNestedGraph()</code>	217
6.48.3.3 <code>getMetadataNestedTypes()</code>	217
6.48.3.4 <code>getMetadataType()</code>	218
6.48.3.5 <code>getObjects()</code>	218
6.48.3.6 <code>perturb()</code>	218

6.48.3.7	reset()	218
6.48.3.8	run()	218
6.48.4	Member Data Documentation	219
6.48.4.1	currentContainer [1/2]	219
6.48.4.2	currentContainer [2/2]	219
6.48.4.3	list_stagecontainers	219
6.49	skdiscovery.data_structure.framework.StageContainerIncrementalAdd Class Reference	219
6.49.1	Detailed Description	220
6.49.2	Constructor & Destructor Documentation	220
6.49.2.1	__init__()	220
6.49.3	Member Function Documentation	221
6.49.3.1	getMetadata()	221
6.49.3.2	getMetadataNestedGraph()	221
6.49.3.3	getMetadataNestedTypes()	221
6.49.3.4	getMetadataType()	222
6.49.3.5	getObjects()	222
6.49.3.6	perturb()	222
6.49.3.7	reset()	222
6.49.3.8	run()	223
6.49.4	Member Data Documentation	223
6.49.4.1	currentindex	223
6.49.4.2	length	223
6.49.4.3	list_AllStagecontainers	223
6.49.4.4	list_currentContainers	223
6.50	skdiscovery.data_structure.table.filters.TableFilter Class Reference	224
6.50.1	Detailed Description	224
6.50.2	Constructor & Destructor Documentation	224
6.50.2.1	__init__()	224

6.50.3	Member Function Documentation	225
6.50.3.1	__str__()	225
6.50.3.2	getMetadata()	225
6.50.3.3	perturbParams()	225
6.50.3.4	process()	225
6.50.3.5	resetParams()	226
6.50.4	Member Data Documentation	226
6.50.4.1	ap_paramList	226
6.50.4.2	ap_paramNames	226
6.50.4.3	str_description	226
6.51	skdiscovery.data_structure.series.filters.TrendFilter Class Reference	227
6.51.1	Detailed Description	227
6.51.2	Constructor & Destructor Documentation	227
6.51.2.1	__init__()	227
6.51.3	Member Function Documentation	228
6.51.3.1	process()	228
6.51.4	Member Data Documentation	228
6.51.4.1	ap_paramNames	228
6.52	skdiscovery.data_structure.table.filters.TrendFilter Class Reference	228
6.52.1	Detailed Description	229
6.52.2	Constructor & Destructor Documentation	229
6.52.2.1	__init__()	229
6.52.3	Member Function Documentation	229
6.52.3.1	process()	230
6.52.4	Member Data Documentation	230
6.52.4.1	ap_paramNames	230
6.52.4.2	columns	230
6.53	skdiscovery.data_structure.table.filters.WeightedAverage Class Reference	230

6.53.1 Detailed Description	231
6.53.2 Constructor & Destructor Documentation	231
6.53.2.1 <code>__init__()</code>	231
6.53.3 Member Function Documentation	232
6.53.3.1 <code>__str__()</code>	232
6.53.3.2 <code>getMetadata()</code>	232
6.53.3.3 <code>perturbParams()</code>	232
6.53.3.4 <code>process()</code>	233
6.53.3.5 <code>resetParams()</code>	234
6.53.4 Member Data Documentation	234
6.53.4.1 <code>ap_paramList</code>	234
6.53.4.2 <code>ap_paramNames</code>	234
6.53.4.3 <code>column_names</code>	234
6.53.4.4 <code>propagate_uncertainties</code>	234
6.53.4.5 <code>std_dev_column_names</code>	234
6.53.4.6 <code>str_description</code>	234
7 File Documentation	235
7.1 <code>data_structure/framework/base.py</code> File Reference	235
7.2 <code>data_structure/framework/config.py</code> File Reference	235
7.3 <code>data_structure/framework/discoverypipeline.py</code> File Reference	236
7.4 <code>data_structure/framework/stagecontainers.py</code> File Reference	236
7.5 <code>data_structure/generic/accumulators/data.py</code> File Reference	236
7.6 <code>data_structure/generic/accumulators/gpshplotter.py</code> File Reference	237
7.7 <code>data_structure/generic/accumulators/hcluster.py</code> File Reference	237
7.8 <code>data_structure/series/accumulators/plotter.py</code> File Reference	237
7.9 <code>data_structure/table/accumulators/plotter.py</code> File Reference	237
7.10 <code>data_structure/series/analysis/correlate.py</code> File Reference	238

7.11 data_structure/table/analysis/correlate.py File Reference	238
7.12 data_structure/series/analysis/gca.py File Reference	238
7.13 data_structure/table/analysis/gca.py File Reference	239
7.14 data_structure/series/analysis/mogi.py File Reference	239
7.15 data_structure/table/analysis/mogi.py File Reference	239
7.16 data_structure/series/filters/dataremover.py File Reference	240
7.17 data_structure/table/filters/dataremover.py File Reference	240
7.18 data_structure/series/filters/hyperbolictan.py File Reference	240
7.19 data_structure/table/filters/hyperbolictan.py File Reference	241
7.20 data_structure/series/filters/interpolate.py File Reference	241
7.21 data_structure/table/filters/interpolate.py File Reference	241
7.22 data_structure/series/filters/kalman.py File Reference	241
7.23 data_structure/table/filters/kalman.py File Reference	242
7.24 data_structure/series/filters/lowpass.py File Reference	242
7.25 data_structure/table/filters/lowpass.py File Reference	242
7.26 data_structure/series/filters/median.py File Reference	243
7.27 data_structure/table/filters/median.py File Reference	243
7.28 data_structure/series/filters/offset_detrend.py File Reference	243
7.29 data_structure/table/filters/offset_detrend.py File Reference	243
7.30 data_structure/series/filters/trend.py File Reference	244
7.31 data_structure/table/filters/trend.py File Reference	244
7.32 data_structure/table/analysis/dbscan.py File Reference	244
7.33 data_structure/table/analysis/midas.py File Reference	245
7.34 data_structure/table/analysis/outlier.py File Reference	245
7.35 data_structure/table/analysis/skew.py File Reference	245
7.36 data_structure/table/filters/antenna_offset.py File Reference	245
7.37 data_structure/table/filters/calibrate_py File Reference	246
7.38 data_structure/table/filters/combine_columns.py File Reference	246

7.39 data_structure/table/filters/geolocation.py File Reference	246
7.40 data_structure/table/filters/normalize.py File Reference	247
7.41 data_structure/table/filters/propagate_nans.py File Reference	247
7.42 data_structure/table/filters/resample.py File Reference	247
7.43 data_structure/table/filters/snow_remover.py File Reference	247
7.44 data_structure/table/filters/stabilization.py File Reference	248
7.45 data_structure/table/filters/table_filter.py File Reference	248
7.46 data_structure/table/filters/weighted_average.py File Reference	248
7.47 data_structure/table/fusion/grace.py File Reference	249
7.48 data_structure/table/fusion/snow.py File Reference	249
7.49 data_structure/table/generators/catalog_generator.py File Reference	249
7.50 data_structure/table/generators/data_generator.py File Reference	249
7.51 utilities/cloud/amazon_control.py File Reference	250
7.52 utilities/cloud/amazon_gui.py File Reference	251
7.53 utilities/cloud/ssh_reverse.py File Reference	251
7.54 utilities/patterns/astro_tools.py File Reference	252
7.55 utilities/patterns/kalman_smoother.py File Reference	253
7.56 utilities/patterns/pbo_tools.py File Reference	253
7.57 utilities/patterns/random_walks.py File Reference	254
7.58 utilities/patterns/trend_tools.py File Reference	254
7.59 utilities/planetary/map_util.py File Reference	254
7.60 visualization/emd_plot.py File Reference	255
7.61 visualization/fourier_plot.py File Reference	256
7.62 visualization/linear_decomposition_plot.py File Reference	256
7.63 visualization/multi_ca_plot.py File Reference	257
7.64 visualization/multi_dist.py File Reference	257
7.65 visualization/spherical_voronoi.py File Reference	257
7.66 visualization/spiral_plot.py File Reference	258
7.67 visualization/vis_utils.py File Reference	258
7.68 visualization/wavelets_plot.py File Reference	259

Chapter 1

Namespace Index

1.1 Packages

Here are the packages with brief descriptions (if available):

skdiscovery	13
skdiscovery.data_structure	13
skdiscovery.data_structure.framework	13
skdiscovery.data_structure.framework.base	14
skdiscovery.data_structure.framework.config	14
skdiscovery.data_structure.framework.discoverypipeline	15
skdiscovery.data_structure.framework.stagecontainers	15
skdiscovery.data_structure.generic	16
skdiscovery.data_structure.generic.accumulators	16
skdiscovery.data_structure.generic.accumulators.data	16
skdiscovery.data_structure.generic.accumulators.gpsplotter	16
skdiscovery.data_structure.generic.accumulators.hcluster	16
skdiscovery.data_structure.series	16
skdiscovery.data_structure.series.accumulators	17
skdiscovery.data_structure.series.accumulators.plotter	17
skdiscovery.data_structure.series.analysis	17
skdiscovery.data_structure.series.analysis.correlate	17
skdiscovery.data_structure.series.analysis.gca	17
skdiscovery.data_structure.series.analysis.mogi	17
skdiscovery.data_structure.series.filters	18
skdiscovery.data_structure.series.filters.dataremover	19
skdiscovery.data_structure.series.filters.hyperbolictan	19
skdiscovery.data_structure.series.filters.interpolate	19
skdiscovery.data_structure.series.filters.kalman	19
skdiscovery.data_structure.series.filters.lowpass	19
skdiscovery.data_structure.series.filters.median	19
skdiscovery.data_structure.series.filters.offset_detrend	20
skdiscovery.data_structure.series.filters.trend	20
skdiscovery.data_structure.table	20
skdiscovery.data_structure.table.accumulators	20
skdiscovery.data_structure.table.accumulators.plotter	20

skdiscovery.data_structure.table.analysis	21
skdiscovery.data_structure.table.analysis.correlate	21
skdiscovery.data_structure.table.analysis.dbscan	21
skdiscovery.data_structure.table.analysis.gca	21
skdiscovery.data_structure.table.analysis.midas	21
skdiscovery.data_structure.table.analysis.mogi	22
skdiscovery.data_structure.table.analysis.outlier	22
skdiscovery.data_structure.table.analysis.skew	23
skdiscovery.data_structure.table.filters	23
skdiscovery.data_structure.table.filters.antenna_offset	23
skdiscovery.data_structure.table.filters.calibrate_grace	23
skdiscovery.data_structure.table.filters.combine_columns	24
skdiscovery.data_structure.table.filters.dataremover	24
skdiscovery.data_structure.table.filters.geolocation	24
skdiscovery.data_structure.table.filters.hyperbolictan	24
skdiscovery.data_structure.table.filters.interpolate	24
skdiscovery.data_structure.table.filters.kalman	24
skdiscovery.data_structure.table.filters.lowpass	25
skdiscovery.data_structure.table.filters.median	25
skdiscovery.data_structure.table.filters.normalize	25
skdiscovery.data_structure.table.filters.offset_detrend	25
skdiscovery.data_structure.table.filters.propagate_nans	25
skdiscovery.data_structure.table.filters.resample	25
skdiscovery.data_structure.table.filters.snow_remover	26
skdiscovery.data_structure.table.filters.stabilization	26
skdiscovery.data_structure.table.filters.table_filter	26
skdiscovery.data_structure.table.filters.trend	26
skdiscovery.data_structure.table.filters.weighted_average	26
skdiscovery.data_structure.table.fusion	26
skdiscovery.data_structure.table.fusion.grace	27
skdiscovery.data_structure.table.fusion.snow	27
skdiscovery.data_structure.table.generators	27
skdiscovery.data_structure.table.generators.catalog_generator	27
skdiscovery.data_structure.table.generators.data_generator	27
skdiscovery.utilities	27
skdiscovery.utilities.cloud	28
skdiscovery.utilities.cloud.amazon_control	28
skdiscovery.utilities.cloud.amazon_gui	34
skdiscovery.utilities.cloud.ssh_reverse	37
skdiscovery.utilities.patterns	38
skdiscovery.utilities.patterns.astro_tools	39
skdiscovery.utilities.patterns.kalman_smoother	45
skdiscovery.utilities.patterns.pbo_tools	50
skdiscovery.utilities.patterns.random_walks	55
skdiscovery.utilities.patterns.trend_tools	57
skdiscovery.utilities.planetary	59
skdiscovery.utilities.planetary.map_util	59
skdiscovery.visualization	63
skdiscovery.visualization.emd_plot	63
skdiscovery.visualization.fourier_plot	71
skdiscovery.visualization.linear_decomposition_plot	72
skdiscovery.visualization.multi_ca_plot	75
skdiscovery.visualization.multi_dist	76
skdiscovery.visualization.spherical_voronoi	77

skdiscovery.visualization.spiral_plot	80
skdiscovery.visualization.vis_utils	82
skdiscovery.visualization.wavelets_plot	84

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

skdiscovery.data_structure.framework.DiscoveryPipeline	113
object	
skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel	199
skdiscovery.data_structure.framework.PipelineItem	179
skdiscovery.data_structure.table.analysis.MIDAS	159
skdiscovery.data_structure.table.filters.CalibrateGRACE	89
skdiscovery.data_structure.table.filters.CombineColumns	96
skdiscovery.data_structure.table.filters.GeoLocationFilter	125
skdiscovery.data_structure.table.filters.PropagateNaNs	192
skdiscovery.data_structure.table.filters.Resample	195
skdiscovery.data_structure.table.filters.StabilizationFilter	209
skdiscovery.data_structure.table.filters.TableFilter	224
skdiscovery.data_structure.table.filters.WeightedAverage	230
skdiscovery.data_structure.table.fusion.GraceFusion	131
skdiscovery.data_structure.table.fusion.SnowFusion	203
skdiscovery.utilities.planetary.map_util.Planet	182
skdiscovery.data_structure.framework.StageContainer	211
skdiscovery.data_structure.framework.StageContainerAlternative	215
skdiscovery.data_structure.framework.StageContainerIncrementalAdd	219
DataFetcherBase	
skdiscovery.data_structure.table.generators.CatalogGenerator	93
skdiscovery.data_structure.table.generators.DataGenerator	105
PipelineItem	
skdiscovery.data_structure.generic.accumulators.DataAccumulator	104
skdiscovery.data_structure.generic.accumulators.GPSHPlotter	128
skdiscovery.data_structure.generic.accumulators.HCluster	135
skdiscovery.data_structure.series.accumulators.Plotter	185
skdiscovery.data_structure.series.analysis.Correlate	102
skdiscovery.data_structure.series.analysis.General_Component_Analysis	119
skdiscovery.data_structure.series.analysis.Mogi_Inversion	163
skdiscovery.data_structure.series.filters.DataRemover	109

skdiscovery.data_structure.series.filters.HTanFilter	141
skdiscovery.data_structure.series.filters.InterpolateFilter	146
skdiscovery.data_structure.series.filters.KalmanFilter	147
skdiscovery.data_structure.series.filters.LowPassFilter	151
skdiscovery.data_structure.series.filters.MedianFilter	155
skdiscovery.data_structure.series.filters.OffsetDetrend	171
skdiscovery.data_structure.series.filters.TrendFilter	227
skdiscovery.data_structure.table.accumulators.Plotter	188
skdiscovery.data_structure.table.analysis.Correlate	100
skdiscovery.data_structure.table.analysis.DBScan	111
skdiscovery.data_structure.table.analysis.General_Component_Analysis	122
skdiscovery.data_structure.table.analysis.Mogi_Inversion	166
skdiscovery.data_structure.table.analysis.Outlier	177
skdiscovery.data_structure.table.analysis.Skew	202
skdiscovery.data_structure.table.filters.AntennaOffset	87
skdiscovery.data_structure.table.filters.DataRemover	107
skdiscovery.data_structure.table.filters.HTanFilter	137
skdiscovery.data_structure.table.filters.InterpolateFilter	145
skdiscovery.data_structure.table.filters.KalmanFilter	149
skdiscovery.data_structure.table.filters.LowPassFilter	153
skdiscovery.data_structure.table.filters.MedianFilter	157
skdiscovery.data_structure.table.filters.NormalizeFilter	169
skdiscovery.data_structure.table.filters.OffsetDetrend	174
skdiscovery.data_structure.table.filters.SnowRemover	207
skdiscovery.data_structure.table.filters.TrendFilter	228

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

skdiscovery.data_structure.table.filters.AntennaOffset	
Applies corrections to fix offsets in PBO GPS data induced by antenna changes	87
skdiscovery.data_structure.table.filters.CalibrateGRACE	
Calibrate Grace Data	89
skdiscovery.data_structure.table.generators.CatalogGenerator	
<i>In Development</i> Generates galaxy catalogs for use in DiscoveryPipeline	93
skdiscovery.data_structure.table.filters.CombineColumns	
Create a new column by selecting data from a column	96
skdiscovery.data_structure.table.analysis.Correlate	
Computes the correlation for table data and stores the result as a matrix	100
skdiscovery.data_structure.series.analysis.Correlate	
Computes the correlation for series data	102
skdiscovery.data_structure.generic.accumulators.DataAccumulator	
Stores a copy of the data in its current state in the pipeline	104
skdiscovery.data_structure.table.generators.DataGenerator	
In Class for generating random data	105
skdiscovery.data_structure.table.filters.DataRemover	
Sets specified table data to NaN	107
skdiscovery.data_structure.series.filters.DataRemover	
Sets specified series data to NaN	109
skdiscovery.data_structure.table.analysis.DBScan	
Runs DBScan on table data	111
skdiscovery.data_structure.framework.DiscoveryPipeline	
Pipeline for running the analysis	113
skdiscovery.data_structure.series.analysis.General_Component_Analysis	
Performs either ICA or PCA analysis on series data	119
skdiscovery.data_structure.table.analysis.General_Component_Analysis	
Performs a general component analysis on table data	122
skdiscovery.data_structure.table.filters.GeoLocationFilter	
Removes objects not located in a specified region	125
skdiscovery.data_structure.generic.accumulators.GPSHPlotter	
Plots results from General_Component_Analysis , for the GPS horizontal or vertical components . . .	128

skdiscovery.data_structure.table.fusion.GraceFusion	
Fuses GRACE equivalent water depth time series	131
skdiscovery.data_structure.generic.accumulators.HCluster	
Hierarchical Clustering function that produces a cluster map of the distance matrix	135
skdiscovery.data_structure.table.filters.HTanFilter	
Filter to subtract an arctan fit from data	137
skdiscovery.data_structure.series.filters.HTanFilter	
Filter to subtract arctan fit from data	141
skdiscovery.data_structure.table.filters.InterpolateFilter	
Interpolate missing values on table data	145
skdiscovery.data_structure.series.filters.InterpolateFilter	
Interpolate missing values on series data	146
skdiscovery.data_structure.series.filters.KalmanFilter	
Runs a Kalman Smoother on series data	147
skdiscovery.data_structure.table.filters.KalmanFilter	
Runs a Kalman Smoother on table data	149
skdiscovery.data_structure.series.filters.LowPassFilter	
A FIR Remez (Parks-McLellan) designed low pass filter for series data	151
skdiscovery.data_structure.table.filters.LowPassFilter	
A remez low pass filter for table data	153
skdiscovery.data_structure.series.filters.MedianFilter	
A Median filter for series data	155
skdiscovery.data_structure.table.filters.MedianFilter	
A Median filter for table data	157
skdiscovery.data_structure.table.analysis.MIDAS	
<i>In Development</i> A basic MIDAS trend estimator	159
skdiscovery.data_structure.series.analysis.Mogi_Inversion	
Perform a Mogi source inversion on a set of gps series data	163
skdiscovery.data_structure.table.analysis.Mogi_Inversion	
Perform a mogi source inversion on a set of gps table data	166
skdiscovery.data_structure.table.filters.NormalizeFilter	
Normalize data using median filter	169
skdiscovery.data_structure.series.filters.OffsetDetrend	
Trend filter that fits a stepwise function to linearly detrended series data	171
skdiscovery.data_structure.table.filters.OffsetDetrend	
Trend filter that fits a stepwise function to linearly detrended table data	174
skdiscovery.data_structure.table.analysis.Outlier	
Computes (data / mad(data)) for outlier detection	177
skdiscovery.data_structure.framework.PipelineItem	
The general class used to create pipeline items	179
skdiscovery.utilities.planetary.map_util.Planet	
A class for storing variables about a planetary body	182
skdiscovery.data_structure.series.accumulators.Plotter	
Make a plot of series data	185
skdiscovery.data_structure.table.accumulators.Plotter	
Make a plot of table data	188
skdiscovery.data_structure.table.filters.PropagateNaNs	
Propagates NaN's from one column to other columns	192
skdiscovery.data_structure.table.filters.Resample	
Resample data	195
skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel	
Create a reverse ssh tunnel	199
skdiscovery.data_structure.table.analysis.Skew	
Calculates the skew of table data	202

skdiscovery.data_structure.table.fusion.SnowFusion	
Adds snow time series data to table based on geographic coordinates	203
skdiscovery.data_structure.table.filters.SnowRemover	
Removes data with snow errors	207
skdiscovery.data_structure.table.filters.StabilizationFilter	
This filter transforms GPS stations in a region to a local reference frame	209
skdiscovery.data_structure.framework.StageContainer	
Container to hold a stage for the DiscoveryPipeline	211
skdiscovery.data_structure.framework.StageContainerAlternative	
Stage Container that holds a list of stage containers and randomly chooses one to use	215
skdiscovery.data_structure.framework.StageContainerIncrementalAdd	
In each perturb call, it incrementally adds one of the filters specified in the constructor	219
skdiscovery.data_structure.table.filters.TableFilter	
This class removes tables based on their label	224
skdiscovery.data_structure.series.filters.TrendFilter	
Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data	227
skdiscovery.data_structure.table.filters.TrendFilter	
Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data	228
skdiscovery.data_structure.table.filters.WeightedAverage	
This filter performs a rolling weighted average using standard deviations as weight	230

Chapter 4

File Index

4.1 File List

Here is a list of all files with brief descriptions:

data_structure/framework/ base.py	235
data_structure/framework/ config.py	235
data_structure/framework/ discoverypipeline.py	236
data_structure/framework/ stagecontainers.py	236
data_structure/generic/accumulators/ data.py	236
data_structure/generic/accumulators/ gpsplotter.py	237
data_structure/generic/accumulators/ hcluster.py	237
data_structure/series/accumulators/ plotter.py	237
data_structure/series/analysis/ correlate.py	238
data_structure/series/analysis/ gca.py	238
data_structure/series/analysis/ mogi.py	239
data_structure/series/filters/ dataremover.py	240
data_structure/series/filters/ hyperbolictan.py	240
data_structure/series/filters/ interpolate.py	241
data_structure/series/filters/ kalman.py	241
data_structure/series/filters/ lowpass.py	242
data_structure/series/filters/ median.py	243
data_structure/series/filters/ offset_detrend.py	243
data_structure/series/filters/ trend.py	244
data_structure/table/accumulators/ plotter.py	237
data_structure/table/analysis/ correlate.py	238
data_structure/table/analysis/ dbscan.py	244
data_structure/table/analysis/ gca.py	239
data_structure/table/analysis/ midas.py	245
data_structure/table/analysis/ mogi.py	239
data_structure/table/analysis/ outlier.py	245
data_structure/table/analysis/ skew.py	245
data_structure/table/filters/ antenna_offset.py	245
data_structure/table/filters/ calibrate_py	246
data_structure/table/filters/ combine_columns.py	246
data_structure/table/filters/ dataremover.py	240

data_structure/table/filters/geolocation.py	246
data_structure/table/filters/hyperbolictan.py	241
data_structure/table/filters/interpolate.py	241
data_structure/table/filters/kalman.py	242
data_structure/table/filters/lowpass.py	242
data_structure/table/filters/median.py	243
data_structure/table/filters/normalize.py	247
data_structure/table/filters/offset_detrend.py	243
data_structure/table/filters/propagate_nans.py	247
data_structure/table/filters/resample.py	247
data_structure/table/filters/snow_remover.py	247
data_structure/table/filters/stabilization.py	248
data_structure/table/filters/table_filter.py	248
data_structure/table/filters/trend.py	244
data_structure/table/filters/weighted_average.py	248
data_structure/table/fusion/grace.py	249
data_structure/table/fusion/snow.py	249
data_structure/table/generators/catalog_generator.py	249
data_structure/table/generators/data_generator.py	249
utilities/cloud/amazon_control.py	250
utilities/cloud/amazon_gui.py	251
utilities/cloud/ssh_reverse.py	251
utilities/patterns/astro_tools.py	252
utilities/patterns/kalman_smoother.py	253
utilities/patterns/pbo_tools.py	253
utilities/patterns/random_walks.py	254
utilities/patterns/trend_tools.py	254
utilities/planetary/map_util.py	254
visualization/emd_plot.py	255
visualization/fourier_plot.py	256
visualization/linear_decomposition_plot.py	256
visualization/multi_ca_plot.py	257
visualization/multi_dist.py	257
visualization/spherical_voronoi.py	257
visualization/spiral_plot.py	258
visualization/vis_utils.py	258
visualization/wavelets_plot.py	259

Chapter 5

Namespace Documentation

5.1 skdiscovery Namespace Reference

Namespaces

- [data_structure](#)
- [utilities](#)
- [visualization](#)

5.2 skdiscovery.data_structure Namespace Reference

Namespaces

- [framework](#)
- [generic](#)
- [series](#)
- [table](#)

5.3 skdiscovery.data_structure.framework Namespace Reference

Namespaces

- [base](#)
- [config](#)
- [discoverypipeline](#)
- [stagecontainers](#)

5.4 skdiscovery.data_structure.framework.base Namespace Reference

Classes

- class [PipelineItem](#)
The general class used to create pipeline items.

5.5 skdiscovery.data_structure.framework.config Namespace Reference

Functions

- def [getConfig](#) ()
Retrieve skdiscovery configuration.
- def [writeConfigValue](#) (section, key, value)
Write config to disk.
- def [getDispyPassword](#) ()
Get dispy password.
- def [getHostName](#) ()
Get Host name for displaying link to dispy status.

5.5.1 Function Documentation

5.5.1.1 getConfig()

```
def skdiscovery.data_structure.framework.config.getConfig ( )
```

Retrieve skdiscovery configuration.

Returns

skdiscovery configparser

5.5.1.2 getDispyPassword()

```
def skdiscovery.data_structure.framework.config.getDispyPassword ( )
```

Get dispy password.

Returns

dispy password

5.5.1.3 getHostName()

```
def skdiscovery.data_structure.framework.config.getHostName ( )
```

Get Host name for displaying link to dispy status.

Returns

Hostname

5.5.1.4 writeConfigValue()

```
def skdiscovery.data_structure.framework.config.writeConfigValue (
    section,
    key,
    value )
```

Write config to disk.

Parameters

<i>section</i>	Name of section
<i>key</i>	Name of key
<i>value</i>	Value to write

5.6 skdiscovery.data_structure.framework.discoverypipeline Namespace Reference

Classes

- class [DiscoveryPipeline](#)
Pipeline for running the analysis.

5.7 skdiscovery.data_structure.framework.stagecontainers Namespace Reference

Classes

- class [StageContainer](#)
Container to hold a stage for the DiscoveryPipeline.
- class [StageContainerAlternative](#)
Stage Container that holds a list of stage containers and randomly chooses one to use.
- class [StageContainerIncrementalAdd](#)
In each perturb call, it incrementally adds one of the filters specified in the constructor.

5.8 skdiscovery.data_structure.generic Namespace Reference

Namespaces

- [accumulators](#)

5.9 skdiscovery.data_structure.generic.accumulators Namespace Reference

Namespaces

- [data](#)
- [gpsplotter](#)
- [hcluster](#)

5.10 skdiscovery.data_structure.generic.accumulators.data Namespace Reference

Classes

- class [DataAccumulator](#)
Stores a copy of the data in its current state in the pipeline.

5.11 skdiscovery.data_structure.generic.accumulators.gpsplotter Namespace Reference

Classes

- class [GPSHPlotter](#)
Plots results from General_Component_Analysis, for the GPS horizontal or vertical components.

5.12 skdiscovery.data_structure.generic.accumulators.hcluster Namespace Reference

Classes

- class [HCluster](#)
Hierarchical Clustering function that produces a cluster map of the distance matrix.

5.13 skdiscovery.data_structure.series Namespace Reference

Namespaces

- [accumulators](#)
- [analysis](#)
- [filters](#)

5.14 skdiscovery.data_structure.series.accumulators Namespace Reference

Namespaces

- [plotter](#)

5.15 skdiscovery.data_structure.series.accumulators.plotter Namespace Reference

Classes

- class [Plotter](#)
Make a plot of series data.

5.16 skdiscovery.data_structure.series.analysis Namespace Reference

Namespaces

- [correlate](#)
- [gca](#)
- [mogi](#)

5.17 skdiscovery.data_structure.series.analysis.correlate Namespace Reference

Classes

- class [Correlate](#)
Computes the correlation for series data.

5.18 skdiscovery.data_structure.series.analysis.gca Namespace Reference

Classes

- class [General_Component_Analysis](#)
Performs either ICA or PCA analysis on series data.

5.19 skdiscovery.data_structure.series.analysis.mogi Namespace Reference

Classes

- class [Mogi_Inversion](#)
Perform a Mogi source inversion on a set of gps series data.

Functions

- def [MogiVectors](#) (mogi_res, station_lat_list, station_lon_list, flag3D=False)
Creates a set of Mogi vectors for plotting.

5.19.1 Function Documentation

5.19.1.1 MogiVectors()

```
def skdiscovery.data_structure.series.analysis.MogiVectors (
    mogi_res,
    station_lat_list,
    station_lon_list,
    flag3D = False )
```

Creates a set of Mogi vectors for plotting.

Parameters

<i>mogi_res</i>	Magma source inversion results
<i>station_lat_list</i>	List of station latitudes
<i>station_lon_list</i>	List of station longitudes
<i>flag3D</i>	Flag for generating 3 dimensional vectors instead of only horizontal

Returns

x and y Mogi vectors scaled by pca amplitude change

5.20 skdiscovery.data_structure.series.filters Namespace Reference

Namespaces

- [dataremoval](#)
- [hyperbolicity](#)
- [interpolate](#)
- [kalman](#)
- [lowpass](#)
- [median](#)
- [offset_detrend](#)
- [trend](#)

5.21 skdiscovery.data_structure.series.filters.dataremover Namespace Reference

Classes

- class [DataRemover](#)
Sets specified series data to NaN.

5.22 skdiscovery.data_structure.series.filters.hyperbolictan Namespace Reference

Classes

- class [HTanFilter](#)
Filter to subtract arctan fit from data.

5.23 skdiscovery.data_structure.series.filters.interpolate Namespace Reference

Classes

- class [InterpolateFilter](#)
Interpolate missing values on series data.

5.24 skdiscovery.data_structure.series.filters.kalman Namespace Reference

Classes

- class [KalmanFilter](#)
Runs a Kalman Smoother on series data.

5.25 skdiscovery.data_structure.series.filters.lowpass Namespace Reference

Classes

- class [LowPassFilter](#)
A FIR Remez (Parks-McLellan) designed low pass filter for series data.

5.26 skdiscovery.data_structure.series.filters.median Namespace Reference

Classes

- class [MedianFilter](#)
A Median filter for series data.

5.27 skdiscovery.data_structure.series.filters.offset_detrend Namespace Reference

Classes

- class [OffsetDetrend](#)

Trend filter that fits a stepwise function to linearly detrended series data.

5.28 skdiscovery.data_structure.series.filters.trend Namespace Reference

Classes

- class [TrendFilter](#)

Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

5.29 skdiscovery.data_structure.table Namespace Reference

Namespaces

- [accumulators](#)
- [analysis](#)
- [filters](#)
- [fusion](#)
- [generators](#)

5.30 skdiscovery.data_structure.table.accumulators Namespace Reference

Namespaces

- [plotter](#)

5.31 skdiscovery.data_structure.table.accumulators.plotter Namespace Reference

Classes

- class [Plotter](#)

Make a plot of table data.

5.32 skdiscovery.data_structure.table.analysis Namespace Reference

Namespaces

- [correlate](#)
- [dbscan](#)
- [gca](#)
- [midas](#)
- [mogi](#)
- [outlier](#)
- [skew](#)

5.33 skdiscovery.data_structure.table.analysis.correlate Namespace Reference

Classes

- class [Correlate](#)
Computes the correlation for table data and stores the result as a matrix.

5.34 skdiscovery.data_structure.table.analysis.dbscan Namespace Reference

Classes

- class [DBScan](#)
Runs [DBScan](#) on table data.

5.35 skdiscovery.data_structure.table.analysis.gca Namespace Reference

Classes

- class [General_Component_Analysis](#)
Performs a general component analysis on table data.

5.36 skdiscovery.data_structure.table.analysis.midas Namespace Reference

Classes

- class [MIDAS](#)
In Development A basic [MIDAS](#) trend estimator

5.37 skdiscovery.data_structure.table.analysis.mogi Namespace Reference

Classes

- class [Mogi_Inversion](#)
Perform a mogi source inversion on a set of gps table data.

Functions

- def [MogiVectors](#) (mogi_res, station_lat_list, station_lon_list, flag3D=False)
Creates a set of mogi vectors for plotting.

5.37.1 Function Documentation

5.37.1.1 MogiVectors()

```
def skdiscovery.data_structure.table.analysis.MogiVectors (
    mogi_res,
    station_lat_list,
    station_lon_list,
    flag3D = False )
```

Creates a set of mogi vectors for plotting.

Parameters

<i>mogi_res</i>	Magma source
<i>station_lat_list</i>	List of station latitudes
<i>station_lon_list</i>	List of station longitudes
<i>flag3D</i>	Make vectors 3 dimensional, defaults to False (2D)

5.38 skdiscovery.data_structure.table.analysis.outlier Namespace Reference

Classes

- class [Outlier](#)
Computes (data / mad(data)) for outlier detection.

5.39 skdiscovery.data_structure.table.analysis.skew Namespace Reference

Classes

- class [Skew](#)
Calculates the skew of table data.

5.40 skdiscovery.data_structure.table.filters Namespace Reference

Namespaces

- [antenna_offset](#)
- [calibrate_grace](#)
- [combine_columns](#)
- [dataremoval](#)
- [geolocation](#)
- [hyperbolictan](#)
- [interpolate](#)
- [kalman](#)
- [lowpass](#)
- [median](#)
- [normalize](#)
- [offset_detrend](#)
- [propagate_nans](#)
- [resample](#)
- [snow_removal](#)
- [stabilization](#)
- [table_filter](#)
- [trend](#)
- [weighted_average](#)

5.41 skdiscovery.data_structure.table.filters.antenna_offset Namespace Reference

Classes

- class [AntennaOffset](#)
Applies corrections to fix offsets in PBO GPS data induced by antenna changes.

5.42 skdiscovery.data_structure.table.filters.calibrate_grace Namespace Reference

Classes

- class [CalibrateGRACE](#)
Calibrate Grace Data.

5.43 `skdiscovery.data_structure.table.filters.combine_columns` Namespace Reference

Classes

- class [CombineColumns](#)
Create a new column by selecting data from a column.

5.44 `skdiscovery.data_structure.table.filters.dataremover` Namespace Reference

Classes

- class [DataRemover](#)
Sets specified table data to NaN.

5.45 `skdiscovery.data_structure.table.filters.geolocation` Namespace Reference

Classes

- class [GeoLocationFilter](#)
Removes objects not located in a specified region.

5.46 `skdiscovery.data_structure.table.filters.hyperbolictan` Namespace Reference

Classes

- class [HTanFilter](#)
Filter to subtract an arctan fit from data.

5.47 `skdiscovery.data_structure.table.filters.interpolate` Namespace Reference

Classes

- class [InterpolateFilter](#)
Interpolate missing values on table data.

5.48 `skdiscovery.data_structure.table.filters.kalman` Namespace Reference

Classes

- class [KalmanFilter](#)
Runs a Kalman Smoother on table data.

5.49 skdiscovery.data_structure.table.filters.lowpass Namespace Reference

Classes

- class [LowPassFilter](#)
A remez low pass filter for table data.

5.50 skdiscovery.data_structure.table.filters.median Namespace Reference

Classes

- class [MedianFilter](#)
A Median filter for table data.

5.51 skdiscovery.data_structure.table.filters.normalize Namespace Reference

Classes

- class [NormalizeFilter](#)
Normalize data using median filter.

5.52 skdiscovery.data_structure.table.filters.offset_detrend Namespace Reference

Classes

- class [OffsetDetrend](#)
Trend filter that fits a stepwise function to linearly detrended table data.

5.53 skdiscovery.data_structure.table.filters.propagate_nans Namespace Reference

Classes

- class [PropagateNaNs](#)
Propagates NaN's from one column to other columns.

5.54 skdiscovery.data_structure.table.filters.resample Namespace Reference

Classes

- class [Resample](#)
Resample data.

5.55 skdiscovery.data_structure.table.filters.snow_remove Namespace Reference

Classes

- class [SnowRemover](#)
Removes data with snow errors.

5.56 skdiscovery.data_structure.table.filters.stabilization Namespace Reference

Classes

- class [StabilizationFilter](#)
This filter transforms GPS stations in a region to a local reference frame.

5.57 skdiscovery.data_structure.table.filters.table_filter Namespace Reference

Classes

- class [TableFilter](#)
This class removes tables based on their label.

5.58 skdiscovery.data_structure.table.filters.trend Namespace Reference

Classes

- class [TrendFilter](#)
Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

5.59 skdiscovery.data_structure.table.filters.weighted_average Namespace Reference

Classes

- class [WeightedAverage](#)
This filter performs a rolling weighted average using standard deviations as weight.

5.60 skdiscovery.data_structure.table.fusion Namespace Reference

Namespaces

- [grace](#)
- [snow](#)

5.61 skdiscovery.data_structure.table.fusion.grace Namespace Reference

Classes

- class [GraceFusion](#)
Fuses GRACE equivalent water depth time series.

5.62 skdiscovery.data_structure.table.fusion.snow Namespace Reference

Classes

- class [SnowFusion](#)
Adds snow time series data to table based on geographic coordinates.

5.63 skdiscovery.data_structure.table.generators Namespace Reference

Namespaces

- [catalog_generator](#)
- [data_generator](#)

5.64 skdiscovery.data_structure.table.generators.catalog_generator Namespace Reference

Classes

- class [CatalogGenerator](#)
In Development Generates galaxy catalogs for use in DiscoveryPipeline

5.65 skdiscovery.data_structure.table.generators.data_generator Namespace Reference

Classes

- class [DataGenerator](#)
In Class for generating random data.

5.66 skdiscovery.utilities Namespace Reference

Namespaces

- [cloud](#)
- [patterns](#)
- [planetary](#)

5.67 skdiscovery.utilities.cloud Namespace Reference

Namespaces

- [amazon_control](#)
- [amazon_gui](#)
- [ssh_reverse](#)

5.68 skdiscovery.utilities.cloud.amazon_control Namespace Reference

Functions

- def [init](#) (in_aws_access_key, in_aws_secret, in_aws_region, in_aws_security_group, in_aws_key_name, in_aws_pem_file)
The underlying functionality for the Amazon GUI, the user should not need to directly interface with this function.
- def [closeDispyScheduler](#) ()
Close the Dispy Scheduler.
- def [startDispyScheduler](#) ()
Start the Dispy Scheduler.
- def [generateInfo](#) (instance)
Read metadata from an Amazon instance.
- def [updateStatus](#) ()
Update status information in amazon_list.
- def [setNumInstances](#) (new_total_instances, instance_type, image_id)
Change the number of running instances.
- def [updateIPAddress](#) (instance_info)
Update ip address of instance info.
- def [goodConnection](#) (instance, port)
Check if an amazon instance has a port open.
- def [createTunnels](#) ()
Create reverse ssh tunnels to all instances.
- def [startDispyNode](#) ()
Start dispy on each Amazon instance.
- def [resetInstances](#) ()
Reboot Amazon instances.
- def [reset](#) ()
Close and clear Amazon List.
- def [close](#) ()
Shutdown all instances, close dispy scheduler and clear Amazon list.
- def [clearAmazonList](#) ()
Shutdown connection tunnels to Amazon instances and clear amazon list.

Variables

- `aws_access_key` = None
- `aws_secret` = None
- `aws_region` = None
- `aws_security_group` = None
- `aws_key_name` = None
- `pem_file` = None
- `ec2_res` = None
- `ec2_client` = None
- list `amazon_list` = []
- `scheduler` = None
- `popen` = None

5.68.1 Function Documentation

5.68.1.1 `clearAmazonList()`

```
def skdiscovery.utilities.cloud.amazon_control.clearAmazonList ( )
```

Shutdown connection tunnels to Amazon instances and clear amazon list.

5.68.1.2 `close()`

```
def skdiscovery.utilities.cloud.amazon_control.close ( )
```

Shutdown all instances, close dispy scheduler and clear Amazon list.

5.68.1.3 `closeDispyScheduler()`

```
def skdiscovery.utilities.cloud.amazon_control.closeDispyScheduler ( )
```

Close the Dispy Scheduler.

5.68.1.4 createTunnels()

```
def skdiscovery.utilities.cloud.amazon_control.createTunnels ( )
```

Create reverse ssh tunnels to all instances.

5.68.1.5 generateInfo()

```
def skdiscovery.utilities.cloud.amazon_control.generateInfo (
    instance )
```

Read metadata from an Amazon instance.

Returns

metadata for Amazon instance

5.68.1.6 goodConnection()

```
def skdiscovery.utilities.cloud.amazon_control.goodConnection (
    instance,
    port )
```

Check if an amazon instance has a port open.

Parameters

<i>instance</i>	Amazon instance information
<i>port</i>	Port to check

Returns

Boolean indicating if a port is open

5.68.1.7 init()

```
def skdiscovery.utilities.cloud.amazon_control.init (
    in_aws_access_key,
```

```
in_aws_secret,  
in_aws_region,  
in_aws_security_group,  
in_aws_key_name,  
in_pem_file )
```

The underlying functionality for the Amazon GUI, the user should not need to directly interface with this function.

Parameters

<i>in_aws_access_key</i>	AWS access key
<i>in_aws_secret</i>	AWS Secret Access Key
<i>in_aws_region</i>	AWS region (e.g. us-west-2)
<i>in_aws_security_group</i>	Security Group Name
<i>in_aws_key_name</i>	Name of Key Pair
<i>in_pem_file</i>	Filename of ssh key

5.68.1.8 reset()

```
def skdiscovery.utilities.cloud.amazon_control.reset ( )
```

Close and clear Amazon List.

5.68.1.9 resetInstances()

```
def skdiscovery.utilities.cloud.amazon_control.resetInstances ( )
```

Reboot Amazon instances.

5.68.1.10 setNumInstances()

```
def skdiscovery.utilities.cloud.amazon_control.setNumInstances (  
    new_total_instances,  
    instance_type,  
    image_id )
```

Change the number of running instances.

Parameters

<i>new_total_instances</i>	New number of instances
<i>instance_type</i>	Instance type for new instances
<i>image_id</i>	ID of image (ami-xxxxxxx)

5.68.1.11 startDispyNode()

```
def skdiscovery.utilities.cloud.amazon_control.startDispyNode ( )
```

Start dispy on each Amazon instance.

5.68.1.12 startDispyScheduler()

```
def skdiscovery.utilities.cloud.amazon_control.startDispyScheduler ( )
```

Start the Dispy Scheduler.

5.68.1.13 updateIPAddress()

```
def skdiscovery.utilities.cloud.amazon_control.updateIPAddress (
    instance_info )
```

Update ip address of instance info.

Parameters

<i>instance_info</i>	Information about amazon instance
----------------------	-----------------------------------

5.68.1.14 updateStatus()

```
def skdiscovery.utilities.cloud.amazon_control.updateStatus ( )
```

Update status information in amazon_list.

5.68.2 Variable Documentation

5.68.2.1 amazon_list

```
list skdiscovery.utilities.cloud.amazon_control.amazon_list = []
```

5.68.2.2 aws_access_key

```
skdiscovery.utilities.cloud.amazon_control.aws_access_key = None
```

5.68.2.3 aws_key_name

```
skdiscovery.utilities.cloud.amazon_control.aws_key_name = None
```

5.68.2.4 aws_region

```
skdiscovery.utilities.cloud.amazon_control.aws_region = None
```

5.68.2.5 aws_secret

```
skdiscovery.utilities.cloud.amazon_control.aws_secret = None
```

5.68.2.6 aws_security_group

```
skdiscovery.utilities.cloud.amazon_control.aws_security_group = None
```

5.68.2.7 ec2_client

```
skdiscovery.utilities.cloud.amazon_control.ec2_client = None
```

5.68.2.8 ec2_res

```
skdiscovery.utilities.cloud.amazon_control.ec2_res = None
```

5.68.2.9 pem_file

```
skdiscovery.utilities.cloud.amazon_control.pem_file = None
```

5.68.2.10 popen

```
skdiscovery.utilities.cloud.amazon_control.popen = None
```

5.68.2.11 scheduler

```
skdiscovery.utilities.cloud.amazon_control.scheduler = None
```

5.69 skdiscovery.utilities.cloud.amazon_gui Namespace Reference

Functions

- def [init](#) ()
Initialize GUI for controlling Amazon instances.
- def [drawGUI](#) ()
Draw the GUI on the screen.
- def [changeButtonState](#) (enabled=True)
Enable or disable the buttons and slider in the GUI.
- def [checkValidValues](#) ()
Check if Amazon information is valid.

Variables

- `widget_dict` = `OrderedDict()`
- list `disable_list` = `['initialize_button', 'cache_button', 'restore_button']`
- list `initialized_disabled_list` = `['new_num_instances_widget', 'execute_instances_button']`
- list `key_value_list`
- bool `initialized` = `False`

5.69.1 Function Documentation

5.69.1.1 `changeButtonState()`

```
def skdiscovery.utilities.cloud.amazon_gui.changeButtonState (
    enabled = True )
```

Enable or disable the buttons and slider in the GUI.

Parameters

<i>enabled</i>	State to change the buttons to.
----------------	---------------------------------

5.69.1.2 `checkValidValues()`

```
def skdiscovery.utilities.cloud.amazon_gui.checkValidValues ( )
```

Check if Amazon information is valid.

Returns

True if all AWS text fields have data in them, false otherwise

5.69.1.3 `drawGUI()`

```
def skdiscovery.utilities.cloud.amazon_gui.drawGUI ( )
```

Draw the GUI on the screen.

5.69.1.4 init()

```
def skdiscovery.utilities.cloud.amazon_gui.init ( )
```

Initialize GUI for controlling Amazon instances.

5.69.2 Variable Documentation

5.69.2.1 disable_list

```
list skdiscovery.utilities.cloud.amazon_gui.disable_list = ['initialize_button', 'cache_button',  
'restore_button']
```

5.69.2.2 initialized

```
bool skdiscovery.utilities.cloud.amazon_gui.initialized = False
```

5.69.2.3 initialized_disabled_list

```
list skdiscovery.utilities.cloud.amazon_gui.initialized_disabled_list = ['new_num_instances_↔  
widget', 'execute_instances_button']
```

5.69.2.4 key_value_list

```
list skdiscovery.utilities.cloud.amazon_gui.key_value_list
```

Initial value:

```
1 = ['aws_id_widget', 'aws_secret_widget', 'aws_region_widget', 'aws_security_widget',  
2     'aws_keyname_widget', 'aws_pem_widget', 'aws_image_id', 'instance_type_widget']
```

5.69.2.5 widget_dict

```
skdiscovery.utilities.cloud.amazon_gui.widget_dict = OrderedDict()
```

5.70 skdiscovery.utilities.cloud.ssh_reverse Namespace Reference

Classes

- class [ReverseTunnel](#)
Create a reverse ssh tunnel.

Functions

- def [print_verbose](#) (s, verbose=False)
Print statement if verbose is True.
- def [handler](#) (chan, host, port, verbose=False)
Handler is responsible for sending and receiving data through ssh tunnel.
- def [reverse_forward_tunnel](#) (server_port, remote_host, remote_port, transport, check=30, verbose=False)
Creates a reverse ssh tunnel.

5.70.1 Function Documentation

5.70.1.1 handler()

```
def skdiscovery.utilities.cloud.ssh_reverse.handler (
    chan,
    host,
    port,
    verbose = False )
```

Handler is responsible for sending and receiving data through ssh tunnel.

Parameters

<i>chan</i>	SSH Channel for transferring data
<i>host</i>	Address of remote host
<i>port</i>	Port to forward
<i>verbose</i>	Print status information

5.70.1.2 `print_verbose()`

```
def skdiscovery.utilities.cloud.ssh_reverse.print_verbose (
    s,
    verbose = False )
```

Print statement if verbose is True.

Parameters

<i>s</i>	Statement to print
<i>verbose</i>	Print only if verbose is True

5.70.1.3 `reverse_forward_tunnel()`

```
def skdiscovery.utilities.cloud.ssh_reverse.reverse_forward_tunnel (
    server_port,
    remote_host,
    remote_port,
    transport,
    check = 30,
    verbose = False )
```

Creates a reverse ssh tunnel.

Parameters

<i>server_port</i>	Port on local host
<i>remote_host</i>	Address of remote host
<i>remote_port</i>	Port of remote host
<i>transport</i>	SSH Transport
<i>check</i>	Amount of time to wait in seconds when opening up a channel
<i>verbose</i>	Print status information

Returns

Thread running reverse ssh tunnel, event used to close ssh tunnel, list of child threads started by main thread

5.71 `skdiscovery.utilities.patterns` Namespace Reference

Namespaces

- [astro_tools](#)

- [kalman_smoother](#)
- [pbo_tools](#)
- [random_walks](#)
- [trend_tools](#)

5.72 skdiscovery.utilities.patterns.astro_tools Namespace Reference

Functions

- def [z_to_v](#) (z)
Convert redshift to km/s assuming shift is due to velocity using special relativity.
- def [v_to_z](#) (v)
Convert km/s to redshift assuming all are using special relativity.
- def [angular_separation](#) (ra1, dec1, ra2, dec2)
Angular separation between two objects via the haversine formula.
- def [move_point](#) (ra, dec, ang_dist, bearing)
Move a point along a great circle at a particular bearing.
- def [abs_mag](#) ([app_mag](#), z)
Get the absolute magnitude from apparent magnitude.
- def [app_mag](#) ([abs_mag](#), z)
Get the apparent magnitude from absolute magnitude.
- def [nfw](#) (R, norm_constant, Rs, Rcore)
2D Navarro-Frenk-White surface radial profile probability density
- def [lf](#) (x, A, mstar, alpha)
Schechter function.
- def [dlf](#) (x, A, m1, a1, m2, a2)
double Schechter function.
- def [cdf_dlf](#) (x, A, m1, a1, m2, a2, start=-26)
Cumulative Schechter function.
- def [inv_cdf_dlf](#) (p, A, m1, a1, m2, a2, start=-26, end=-15)
Inverse Cumulative Schechter function.

5.72.1 Function Documentation

5.72.1.1 [abs_mag\(\)](#)

```
def skdiscovery.utilities.patterns.astro_tools.abs_mag (
    app_mag,
    z )
```

Get the absolute magnitude from apparent magnitude.

Assumes concordance cosmology. No kcorrection is applied.

Parameters

<i>app_mag</i>	Apparent magnitude
<i>z</i>	Redshift

Returns

absolute magnitude of object at *z*

5.72.1.2 angular_separation()

```
def skdiscovery.utilities.patterns.astro_tools.angular_separation (
    ra1,
    dec1,
    ra2,
    dec2 )
```

Angular separation between two objects via the haversine formula.

All inputs are in degrees.

Formula obtained from <http://www.movable-type.co.uk/scripts/gis-faq-5.1.html>

Formula originally presented in R.W. Sinnott, "Virtues of the Haversine", Sky and Telescope, vol. 68, no. 2, 1984, p. 159

Parameters

<i>ra1</i>	Right Ascension of first object (degrees)
<i>dec1</i>	Declination of first object (degrees)
<i>ra2</i>	Right Ascension of second object (degrees)
<i>dec2</i>	Declination of second object (degrees)

Returns

angular separation between two objects

5.72.1.3 app_mag()

```
def skdiscovery.utilities.patterns.astro_tools.app_mag (
    abs_mag,
    z )
```

Get the apparent magnitude from absolute magnitude.

Assumes concordance cosmology. No kcorrection is assumed.

Parameters

<i>abs_mag</i>	Absolute magnitude
<i>z</i>	Redshift

Returns

apparent magnitude of object at *z*

5.72.1.4 cdf_dlf()

```
def skdiscovery.utilities.patterns.astro_tools.cdf_dlf (
    x,
    A,
    m1,
    a1,
    m2,
    a2,
    start = -26 )
```

Cumulative Schechter function.

Second LF is set to be 2*A of first LF.

Parameters

<i>x</i>	magnitude
<i>A</i>	Scale factor
<i>m1</i>	Knee of distribution 1
<i>a1</i>	Faint-end turnover of first lf
<i>m2</i>	Knee of distribution 2
<i>a2</i>	Faint-end turnover of second lf
<i>start</i>	Brightest magnitude

Returns

Probability that galaxy has a magnitude greater than *x*

5.72.1.5 dlf()

```
def skdiscovery.utilities.patterns.astro_tools.dlf (
    x,
```

```

    A,
    m1,
    a1,
    m2,
    a2 )

```

double Schechter function.

Second LF is set to be 2*A of first LF.

Parameters

<i>x</i>	magnitude
<i>A</i>	Scale factor
<i>m1</i>	Knee of distribution 1
<i>a1</i>	Faint-end turnover of first lf
<i>m2</i>	Knee of distribution 2
<i>a2</i>	Faint-end turnover of second lf

Returns

float: Double Schechter function at magnitude x

5.72.1.6 inv_cdf_dlf()

```

def skdiscovery.utilities.patterns.astro_tools.inv_cdf_dlf (
    p,
    A,
    m1,
    a1,
    m2,
    a2,
    start = -26,
    end = -15 )

```

Inverse Cumulative Schechter function.

Second LF is set to be 2*A of first LF.

Parameters

<i>p</i>	probability
<i>A</i>	Scale factor
<i>m1</i>	Knee of distribution 1
<i>a1</i>	Faint-end turnover of first lf
<i>m2</i>	Knee of distribution 2
<i>a2</i>	Faint-end turnover of second lf
<i>start</i>	Brightest magnitude
<i>end</i>	Faintest possible magnitude

Returns

Magnitude associated with cdf probability p

5.72.1.7 lf()

```
def skdiscovery.utilities.patterns.astro_tools.lf (
    x,
    A,
    mstar,
    alpha )
```

Schechter function.

Parameters

<i>x</i>	magnitude
<i>A</i>	Scale factor
<i>mstar</i>	Knee of distribution
<i>alpha</i>	Faint-end turnover

Returns

float: Schechter function at magnitude x

5.72.1.8 move_point()

```
def skdiscovery.utilities.patterns.astro_tools.move_point (
    ra,
    dec,
    ang_dist,
    bearing )
```

Move a point along a great circle at a particular bearing.

All inputs are in degrees The formula was obtained from <http://www.movable-type.co.uk/scripts/latlong.html>

Parameters

<i>ra</i>	Starting right ascension
<i>dec</i>	Starting declination
<i>ang_dist</i>	Angular distance to travel
<i>bearing</i>	Direction to travel (0 is north, 90 is positive RA)

Returns

tuple containing updated ra and dec

5.72.1.9 nfw()

```
def skdiscovery.utilities.patterns.astro_tools.nfw (
    R,
    norm_constant,
    Rs,
    Rcore )
```

2D Navarro-Frenk-White surface radial profile probability density

See

Navarro, J. F., Frenk, C. S., & White, S. D. M. 1996, ApJ, 462, 563 Bartelmann, M., A&A, 1996, 313, 697 Rykoff, E.S., et al., ApJ, 746, 178

Parameters

<i>R</i>	Radius
<i>norm_constant</i>	Normalization constant
<i>Rs</i>	Scale radius
<i>Rcore</i>	Since NFW profile diverges at R=0, the value at the center is held fixed starting at Rcore

Returns

probability density of profile at R

5.72.1.10 v_to_z()

```
def skdiscovery.utilities.patterns.astro_tools.v_to_z (
    v )
```

Convert km/s to redshift assuming all are using special relativity.

Parameters

<i>v</i>	velocity in km/s
----------	------------------

Returns

Redshift of object with speed in km/s

5.72.1.11 z_to_v()

```
def skdiscovery.utilities.patterns.astro_tools.z_to_v (
    z )
```

Convert redshift to km/s assuming shift is due to velocity using special relativity.

Parameters

z	Redshift
---	----------

Returns

speed in km/s assuming shift is due to motion using special relativity

5.73 skdiscovery.utilities.patterns.kalman_smoother Namespace Reference**Functions**

- def [KalmanFilter](#) (in_data, t, sigma_sq, R, Pinit, x0=0, invert=False, clipping=5)
Runs the kalman filter on data.
- def [FitFOGMPParameters](#) (data, Pinit=100, R=1, method='brute', x0=0, clipping=5)
Find best FOGM parameters for a given data set.
- def [IterativeGridSearch](#) (f, args, intervals, max_iter=50, tol=0.1, bounds=None, prev_minimum=None, verbose=False)
Find the minimum of f using an iterative grid search with 3 points per dimension.
- def [KalmanSmoother](#) (in_data, Pinit=1e6, Restimate=1, clipping=5, method='simple', t=None, sigma_sq=None, R=1, verbose=False, max_clip_iter=10)
Smoother based on a forward and a backward kalman filter.
- def [FOGM](#) (size, t, sigma_sq, R)
Generates data from a First Order Gaussian-Markov process.

5.73.1 Function Documentation

5.73.1.1 FitFOGMParameters()

```
def skdiscovery.utilities.patterns.kalman_smoother.FitFOGMParameters (
    data,
    Pinit = 100,
    R = 1,
    method = 'brute',
    x0 = 0,
    clipping = 5 )
```

Find best FOGM parameters for a given data set.

Parameters

<i>data</i>	input data
<i>Pinit</i>	Initial updated covariance
<i>R</i>	Noise Variance
<i>method</i>	Method used to fit FOGM parameters. Use "simple", "brute", or "igrid".
<i>x0</i>	Initial value of x0 to use in the kalman filter
<i>clipping</i>	Clipping factor used when computing cost functions

Returns

best fit correlation time
 FOGM variance
 Noise variance
 correlation time from L
 FOGM variance from Chat

5.73.1.2 FOGM()

```
def skdiscovery.utilities.patterns.kalman_smoother.FOGM (
    size,
    t,
    sigma_sq,
    R )
```

Generates data from a First Order Gaussian-Markov process.

Parameters

<i>size</i>	Number of data points
<i>t</i>	Correlation time
<i>sigma_sq</i>	FOGM variance
<i>R</i>	Measurement variance

Returns

Data generated from a FOGM

5.73.1.3 IterativeGridSearch()

```
def skdiscovery.utilities.patterns.kalman_smoother.IterativeGridSearch (
    f,
    args,
    intervals,
    max_iter = 50,
    tol = 0.1,
    bounds = None,
    prev_minimum = None,
    verbose = False )
```

Find the minimum of f using an iterative grid search with 3 points per dimension.

Parameters

<i>f</i>	Function to be minimized. The function must accept a tuple with coordinates for the first input.
<i>args</i>	additional arguments to pass on to the function.
<i>intervals</i>	Space that contains the minimum. Must be a list of tuples, even if only 1 dimension.
<i>max_iter</i>	Maximum number of iterations before stopping search.
<i>tol</i>	Error tolerance on result.
<i>bounds</i>	Additional set of bounds for ending search.
<i>prev_minimum</i>	Previous minimum of function. If the current minimum is close to the previous minimum the search will stop
<i>verbose</i>	Output debugging information.

Returns

A tuple containing a numpy array with the location of the minimum; and the minimum value of the function.

5.73.1.4 KalmanFilter()

```
def skdiscovery.utilities.patterns.kalman_smoother.KalmanFilter (
    in_data,
    t,
    sigma_sq,
    R,
    Pinit,
    x0 = 0,
```

```
invert = False,  
clipping = 5 )
```

Runs the kalman filter on data.

Parameters

<i>in_data</i>	Input data
<i>t</i>	Correlation time
<i>sigma_sq</i>	FOGM variance
<i>R</i>	Noise variance
<i>Pinit</i>	Initial variance
<i>x0</i>	Initial updated state (default: 0)
<i>invert</i>	Run the filter backwards (boolean flag)
<i>clipping</i>	Clipping factor to use when computing cost functions

Returns

the predicted state
 the predicted covariance
 the updated state
 the updated covariance
 C_hat, the sample innovation variance
 L, a different log variance cost function

5.73.1.5 KalmanSmoother()

```

def skdiscovery.utilities.patterns.kalman_smoother.KalmanSmoother (
    in_data,
    Pinit = 1e6,
    Restimate = 1,
    clipping = 5,
    method = 'simple',
    t = None,
    sigma_sq = None,
    R = 1,
    verbose = False,
    max_clip_iter = 10 )

```

Smoother based on a forward and a backward kalman filter.

Parameters

<i>in_data</i>	Data to be smoothed (must be in a Pandas DataFrame)
<i>Pinit</i>	Initial updated covariance
<i>Restimate</i>	Initial estimate for noise variance
<i>clipping</i>	Iteratively remove points beyond clipping * MSE.
<i>method</i>	Method used to fit FOGM parameters. Use either "simple", "brute", or "igrid".
<i>t</i>	Fixed correlation time to use. Both sigma_sq and R must also be specified.
<i>sigma_sq</i>	Fixed sigma squared to use. Both t and R must also be specified.
<i>R</i>	Fixed measurement error to use Both t and sigma_sq must also be specified.
<i>verbose</i>	Output additional information.
<i>max_clip_iter</i>	Maximum number of clip iterations.

Returns

values smoothed by the kalman smoother
 associated variance of smoothed result
 t, same as input, might have been altered by fitting parameters
 sigma_sq, same as input, might have been altered by fitting parameters
 R, same as input, might have been altered by fitting parameters

5.74 skdiscovery.utilities.patterns.pbo_tools Namespace Reference**Functions**

- def [mogi](#) (xdata, y, x, source_depth, amplitude, latlon=True)
Compute the surface deformation due to changes in a mogi source.
- def [finite_sphere](#) (xdata, lat, lon, source_depth, amplitude, alpha_rad)
Compute the surface deformation due to changes in a finite sphere source.
- def [closed_pipe](#) (xdata, lat, lon, source_depth, amplitude, pipe_delta)
Compute the surface deformation due to changes in a closed pipe source.
- def [constant_open_pipe](#) (xdata, lat, lon, source_depth, amplitude, pipe_delta)
Compute the surface deformation due to changes in a constant width open pipe source.
- def [rising_open_pipe](#) (xdata, lat, lon, source_depth, amplitude, pipe_delta, open_pipe_top)
Compute the surface deformation due to changes in a rising width amplitude open pipe source.
- def [sill](#) (xdata, lat, lon, source_depth, amplitude)
Compute the surface deformation due to changes in a sill-like source.
- def [dirEigenvectors](#) (coord_list, pca_comps, pdir='H')
Takes eigenvectors (north and east) and forces them to point "outward".
- def [datetimeToNumber](#) (in_time)
Converts input pandas Timestamp or pandas DatetimeIndex to unix time.

5.74.1 Function Documentation**5.74.1.1 closed_pipe()**

```
def skdiscovery.utilities.patterns.pbo_tools.closed_pipe (
    xdata,
    lat,
    lon,
    source_depth,
    amplitude,
    pipe_delta )
```

Compute the surface deformation due to changes in a closed pipe source.

For reference, see "Volcano Deformation", Dzurisin 2006, pg 292 (<http://link.springer.com/book/10.1007/978-3-540-49302-0>)

Parameters

<i>xdata</i>	List of the position data with each array element containing [direction (x, y, or z), lat, lon]
<i>lat</i>	Latitude of source
<i>lon</i>	Longitude of source
<i>source_depth</i>	Depth of source
<i>amplitude</i>	Amplitude of source
<i>pipe_delta</i>	Pipe delta from source depth to top/bottom

Returns

list of resulting deformation for each point in xdata

5.74.1.2 constant_open_pipe()

```
def skdiscovery.utilities.patterns.pbo_tools.constant_open_pipe (
    xdata,
    lat,
    lon,
    source_depth,
    amplitude,
    pipe_delta )
```

Compute the surface deformation due to changes in a constant width open pipe source.

For reference, see "Volcano Deformation", Dzurisin 2006, pg 295 (<http://link.springer.com/book/10.1007/978-3-540-49302-0>)

Parameters

<i>xdata</i>	List of the position data with each array element containing [direction (x, y, or z), lat, lon]
<i>lat</i>	Latitude of source
<i>lon</i>	Longitude of source
<i>source_depth</i>	Depth of source
<i>amplitude</i>	Amplitude of source
<i>pipe_delta</i>	Pipe delta from source depth to top/bottom

Returns

list of resulting deformation for each point in xdata

5.74.1.3 `datetimeToNumber()`

```
def skdiscovery.utilities.patterns.pbo_tools.datetimeToNumber (
    in_time )
```

Converts input pandas Timestamp or pandas DatetimeIndex to unix time.

Parameters

<i>in_time</i>	Input pandas timestamp or pandas DatetimeIndex
----------------	--

Returns

unix time

5.74.1.4 `dirEigenvectors()`

```
def skdiscovery.utilities.patterns.pbo_tools.dirEigenvectors (
    coord_list,
    pca_comps,
    pdir = 'H' )
```

Takes eigenvectors (north and east) and forces them to point "outward".

Flips the sign of the projection if needed so that eigenvectors point outward. Needed because the "positive" direction for PCA is arbitrary

Parameters

<i>coord_list</i>	Location of stations for projecting the eigenvectors
<i>pca_comps</i>	PCA components
<i>pdir</i>	PCA direction, vertical or horizontal

Returns

station_lat_list: the station latitude coordinates
 station_lon_list: the station longitude coordinates
 ev_lat_list: the properly oriented corresponding eigenvector latitude component
 ev_lon_list: the properly oriented corresponding eigenvector longitude component
 direction scale factor (1 for no flip, or -1 for flip)

5.74.1.5 `finite_sphere()`

```
def skdiscovery.utilities.patterns.pbo_tools.finite_sphere (
    xdata,
    lat,
    lon,
    source_depth,
    amplitude,
    alpha_rad )
```

Compute the surface deformation due to changes in a finite sphere source.

For reference, see "Volcano Deformation", Dzurisin 2006, pg 290 (<http://link.springer.com/book/10.1007/978-3-540-49302-0>)

Parameters

<i>xdata</i>	List of the position data with each array element containing [direction (x, y, or z), lat, lon]
<i>lat</i>	Latitude of source
<i>lon</i>	Longitude of source
<i>source_depth</i>	Depth of source
<i>amplitude</i>	Amplitude of source
<i>alpha_rad</i>	Alpha radius of the source

Returns

list of resulting deformation for each point in xdata

5.74.1.6 `mogi()`

```
def skdiscovery.utilities.patterns.pbo_tools.mogi (
    xdata,
    y,
    x,
    source_depth,
    amplitude,
    latlon = True )
```

Compute the surface deformation due to changes in a mogi source.

Parameters

<i>xdata</i>	List of the position data with each array element containing [direction (x, y, or z), lat, lon]
<i>y</i>	Source y Position of (default: latitude)
<i>x</i>	Source x Position (default longitude)
<i>source_depth</i>	Depth of source
<i>amplitude</i>	Amplitude of mogi source
<i>latlon</i>	Source y is latitude and source x is longitude

Returns

list of resulting deformation for each point in xdata

5.74.1.7 rising_open_pipe()

```
def skdiscovery.utilities.patterns.pbo_tools.rising_open_pipe (
    xdata,
    lat,
    lon,
    source_depth,
    amplitude,
    pipe_delta,
    open_pipe_top )
```

Compute the surface deformation due to changes in a rising width amplitude open pipe source.

For reference, see "Volcano Deformation", Dzurisin 2006, pg 295 (<http://link.springer.com/book/10.1007/978-3-540-49302-0>)

Parameters

<i>xdata</i>	List of the position data with each array element containing [direction (x, y, or z), lat, lon]
<i>lat</i>	Latitude of source
<i>lon</i>	Longitude of source
<i>source_depth</i>	Depth of source
<i>amplitude</i>	Amplitude of source
<i>pipe_delta</i>	Pipe delta from source depth to top/bottom
<i>open_pipe_top</i>	Depth of the top of the open pipe

Returns

list of resulting deformation for each point in xdata

5.74.1.8 sill()

```
def skdiscovery.utilities.patterns.pbo_tools.sill (
    xdata,
    lat,
    lon,
    source_depth,
    amplitude )
```

Compute the surface deformation due to changes in a sill-like source.

For reference, see "Volcano Deformation", Dzurisin 2006, pg 297 (<http://link.springer.com/book/10.1007/978-3-540-49302-0>)

Parameters

<i>xdata</i>	List of the position data with each array element containing [direction (x, y, or z), lat, lon]
<i>lat</i>	Latitude of source
<i>lon</i>	Longitude of source
<i>source_depth</i>	Depth of source
<i>amplitude</i>	Amplitude of source

Returns

list of resulting deformation for each point in xdata

5.75 skdiscovery.utilities.patterns.random_walks Namespace Reference

Functions

- def [uniform_walk](#) (pos, grid, step_size=None)
A uniform random walk function.
- def [gaussian_walk](#) (pos, grid, step_size=None)
A gaussian random walk function.
- def [keep_in_bound](#) (pos, grid)
Function for truncating and bounding the random walk to within the defined grid.

5.75.1 Function Documentation

5.75.1.1 [gaussian_walk\(\)](#)

```
def skdiscovery.utilities.patterns.random_walks.gaussian_walk (
    pos,
    grid,
    step_size = None )
```

A gaussian random walk function.

Parameters

<i>pos</i>	tuple of input point
<i>grid</i>	bounds for walk
<i>step_size</i>	maximal step size

Returns

position tuple

5.75.1.2 keep_in_bound()

```
def skdiscovery.utilities.patterns.random_walks.keep_in_bound (
    pos,
    grid )
```

Function for truncating and bounding the random walk to within the defined grid.

Parameters

<i>pos</i>	tuple of the point to be checked
<i>grid</i>	the bounds for limiting the walk

Returns

position tuple after bounding the point

5.75.1.3 uniform_walk()

```
def skdiscovery.utilities.patterns.random_walks.uniform_walk (
    pos,
    grid,
    step_size = None )
```

A uniform random walk function.

Parameters

<i>pos</i>	tuple of input point
<i>grid</i>	bounds for walk
<i>step_size</i>	maximal step size

Returns

position tuple

5.76 skdiscovery.utilities.patterns.trend_tools Namespace Reference

Functions

- def [getTrend](#) (xdata)
The getTrend function applies the signal.detrend function.
- def [sinuFits](#) (xdata, fitN=2, rmve=1)
The sinuFits function fits annual and semi-annual sinusoid trends.
- def [interpNaN](#) (data)
Interpolate data using a linear interpolation.
- def [medianFilter](#) (data, window, interpolate=True)
A median filter.

5.76.1 Function Documentation

5.76.1.1 [getTrend\(\)](#)

```
def skdiscovery.utilities.patterns.trend_tools.getTrend (
    xdata )
```

The getTrend function applies the signal.detrend function.

Returns the trend, given a time index input.

Parameters

<i>xdata</i>	1D time-series data in a pandas series format
--------------	---

Returns

the detrended data in pandas series format
the linear trend assuming a 1 day per sample time fit
the parameters for the linear trend

5.76.1.2 [interpNaN\(\)](#)

```
def skdiscovery.utilities.patterns.trend_tools.interpNaN (
    data )
```

Interpolate data using a linear interpolation.

Parameters

<i>data</i>	1d numpy or pandas Series with possible NaN's
-------------	---

Returns

data after interpolation

5.76.1.3 medianFilter()

```
def skdiscovery.utilities.patterns.trend_tools.medianFilter (
    data,
    window,
    interpolate = True )
```

A median filter.

If interpolate is True, data will be interpolated before smoothening. Otherwise, all available data within the window will be used

Parameters

<i>data</i>	Input data
<i>window</i>	Size of filter window
<i>interpolate</i>	Interpolate data before smoothing

Returns

Smoothed data

5.76.1.4 sinuFits()

```
def skdiscovery.utilities.patterns.trend_tools.sinuFits (
    xdata,
    fitN = 2,
    rmve = 1 )
```

The sinuFits function fits annual and semi-annual sinusoid trends.

Other options allow for a monthly and seasonal sinusoid fit. The data is expected to be in pandas format

Parameters

<i>xdata</i>	1D time-series data in a pandas series format
<i>fitN</i>	the number of sinusoids to fit. 1-annual, 2-semi-annual, 3-seasonal, 4-monthly
<i>rmve</i>	a flag to return sinusoid removed data, or the sinusoids

Returns

retrDat: the returned data, either sinusoid removed or the sum of the sinusoids

5.77 skdiscovery.utilities.planetary Namespace Reference

Namespaces

- [map_util](#)

5.78 skdiscovery.utilities.planetary.map_util Namespace Reference

Classes

- class [Planet](#)
A class for storing variables about a planetary body.

Functions

- def [sanitize_latlon](#) (lat_lon_tuple, ppd=1, start_from_90N=False)
Wraps around latitude & longitudes, including interpretation of points past the poles.
- def [trim_map](#) (array, ppd, nswe, lat_npole=90, lon_offset=0)
Returns a copy of a map/array trimmed to the given N, S, W, E extents.
- def [calc_slopes](#) (topo_array, ppd, planet, scaled=True, nswe="global", lon_offset=0, lat_npole=90)
Calculate a slope map from a topographic dataset.
- def [wgs84_distance](#) (point1, point2, planet=[Planet](#)("wgs84"), miles=False)
Vincenty distance adapted from public domain vincenty package.
- def [global_coords](#) (x_in, y_in, coeffs)
Transform pixel coordinates into global coords using affine transformation coefficients.
- def [gps_to_pixel](#) (gpsmethod, gps_coord, bounds)
Function for finding the pixel coordinate associated with a gps coordinate.

5.78.1 Function Documentation

5.78.1.1 `calc_slopes()`

```
def skdiscovery.utilities.planetary.map_util.calc_slopes (
    topo_array,
    ppd,
    planet,
    scaled = True,
    nswe = "global",
    lon_offset = 0,
    lat_npole = 90 )
```

Calculate a slope map from a topographic dataset.

For now, this tool assumes a global topographic dataset; in the future, it will be expanded to work on regional datasets as well

Parameters

<i>topo_array</i>	a global topographic dataset, in numpy array form
<i>ppd</i>	the pixels-per-degree of the topo array
<i>planet</i>	The planetary body in question
<i>scaled</i>	whether values should be scaled by latitude
<i>nswe</i>	the (NW,SE) corners of the area-of-interest
<i>lon_offset</i>	the longitude of the prime meridian in the same system as the given N, S, W, E values
<i>lat_npole</i>	the latitude of the N Pole in the same system as the given N, S, W, E values

5.78.1.2 `global_coords()`

```
def skdiscovery.utilities.planetary.map_util.global_coords (
    x_in,
    y_in,
    coeffs )
```

Transform pixel coordinates into global coords using affine transformation coefficients.

Parameters

<i>x_in</i>	X pixel coordinates
<i>y_in</i>	Y pixel coordinates
<i>coeffs</i>	Affine transformation coefficients

Returns

global coordinates

5.78.1.3 `gps_to_pixel()`

```
def skdiscovery.utilities.planetary.map_util.gps_to_pixel (
    gpsmethod,
    gps_coord,
    bounds )
```

Function for finding the pixel coordinate associated with a gps coordinate.

Parameters

<i>gpsmethod</i>	GPS coordinate mapping function from above
<i>gps_coord</i>	GPS coordinate to match, as (lat,lon)
<i>bounds</i>	Pixel bounds to search within ((y_low,y_high),(x_low,x_high))

Returns

Nearest integer pixel value

5.78.1.4 `sanitize_latlon()`

```
def skdiscovery.utilities.planetary.map_util.sanitize_latlon (
    lat_lon_tuple,
    ppd = 1,
    start_from_90N = False )
```

Wraps around latitude & longitudes, including interpretation of points past the poles.

Parameters

<i>lat_lon_tuple</i>	(lat, lon), in either degrees or pixels
<i>ppd</i>	pixels-per-degree
<i>start_from_90N</i>	consider 90N to be 0 latitude

Returns

Latitude and Longitude after they have been sanitized

5.78.1.5 `trim_map()`

```
def skdiscovery.utilities.planetary.map_util.trim_map (
    array,
```

```

    ppd,
    nswe,
    lat_npole = 90,
    lon_offset = 0 )

```

Returns a copy of a map/array trimmed to the given N, S, W, E extents.

Parameters

<i>array</i>	the input array to be trimmed
<i>ppd</i>	the pixels-per-degree of the array
<i>nswe</i>	a 1x4 array of the desired [N, S, W, E] edges
<i>lat_npole</i>	the latitude of the N Pole in the same system as the given N, S, W, E values
<i>lon_offset</i>	the longitude of the prime meridian in the same system as the given N, S, W, E values

Returns

trimmed_map: the input data trimmed to the desired edges

5.78.1.6 wgs84_distance()

```

def skdiscovery.utilities.planetary.map_util.wgs84_distance (
    point1,
    point2,
    planet = Planet("wgs84"),
    miles = False )

```

Vincenty distance adapted from public domain vincenty package.

Adapted from <https://github.com/maurycyp/vincenty>

```

Vincenty's formula (inverse method) to calculate the distance (in
kilometers or miles) between two points on the surface of a spheroid
>>> wgs84_distance((0.0, 0.0), (0.0, 0.0)) # coincident points
0.0
>>> wgs84_distance((0.0, 0.0), (0.0, 1.0))
111.319491
>>> wgs84_distance((0.0, 0.0), (1.0, 0.0))
110.574389
>>> wgs84_distance((0.0, 0.0), (0.5, 179.5)) # slow convergence
19936.288579
>>> wgs84_distance((0.0, 0.0), (0.5, 179.7)) # failure to converge
>>> boston = (42.3541165, -71.0693514)
>>> newyork = (40.7791472, -73.9680804)
>>> wgs84_distance(boston, newyork)
298.396057
>>> wgs84_distance(boston, newyork, miles=True)
185.414657

```

Parameters

<i>point1</i>	(lat1, lon1)
<i>point2</i>	(lat2, lon2)
<i>planet</i>	Planet to perform the computation on
<i>miles</i>	Convert result to miles (default kilometers)

Returns

distance between point1 and point2

5.79 skdiscovery.visualization Namespace Reference

Namespaces

- [emd_plot](#)
- [fourier_plot](#)
- [linear_decomposition_plot](#)
- [multi_ca_plot](#)
- [multi_dist](#)
- [spherical_voronoi](#)
- [spiral_plot](#)
- [vis_utils](#)
- [wavelets_plot](#)

5.80 skdiscovery.visualization.emd_plot Namespace Reference

Functions

- def [calc_imfs](#) (rawData, nbsym=False)
IMF calculation function, streamlined and quieted.
- def [calc_imfs_sum](#) (imfs, highNum=2, high=True, residual=False)
IMF summation helper function.
- def [plot_imfs](#) (rawData, imfs, toPlot=[], mainTitle='IMFs', show=True, figsize=(12, 10))
Plots raw data and IMFs in a subplot grid (n Imfs [rows] x 1 [col])
- def [plot_imfs_split](#) (rawData, imfs, highNum=2, residual=False, mainTitle='Raw data', collage=False, show=True)
Plots raw data and summed IMFs based on HF/LF cut, can optionally plot the residual separately from LF.
- def [plot_imfs_split_comp](#) (rawData, imfs, highNums=[2], residual=False, plotRaw=True, mainTitle='Raw data', collage=False, show=True)
Like plot_imfs_split, plots raw data and summed IMFs based on two HF/LF cuts.
- def [plot_imfs_noise](#) (imfs, guessType='high', noiseNum=2, collage=False, show=True)
Plots assumed noise from IMF summation in a histogram, with overlaid graphs of fit probability distributions to check if assumption can be validated.
- def [run_plotImfs](#) (inData, imfs=None, nbsym=False, toPlot=[], mainTitle='IMFs', show=True, figsize=(12, 10))

Wrapper for plot_imfs.

- def [run_plotImfsSplit](#) (inData, imfs=None, nbsym=False, highNum=2, residual=False, mainTitle='Raw data', collage=False, show=True)

Wrapper for plot_imfs_split.

- def [run_plotImfsSplitComp](#) (inData, imfs=None, nbsym=False, highNums=[2, residual=False, plotRaw=True, mainTitle='Raw data', collage=False, show=True)

Wrappper for plot_imfs_split_comp.

- def [run_plotImfsNoise](#) (inData, imfs=None, nbsym=False, noiseNum=2, guessType='high', show=True)

Wrapper for plot_imfs_noise.

- def [run_plotImfsSplitNoise](#) (inData, imfs=None, nbsym=False, highNum=2, residual=False, mainTitle='Raw data', noiseNum=2, guessType='high', show=False)

Wrapper for both plot_imfs_split and plot_imfs_noise.

5.80.1 Function Documentation

5.80.1.1 calc_imfs()

```
def skdiscovery.visualization.emd_plot.calc_imfs (
    rawData,
    nbsym = False )
```

IMF calculation function, streamlined and quieted.

Parameters

<i>rawData</i>	Input data for EMD calculation
<i>nbsym</i>	Boolean that would add extra data points near boundaries when calculating; breaks some datasets unless False

Returns

2D numpy.ndarray of IMFs

5.80.1.2 calc_imfs_sum()

```
def skdiscovery.visualization.emd_plot.calc_imfs_sum (
    imfs,
    highNum = 2,
    high = True,
    residual = False )
```

IMF summation helper function.

Parameters

<i>imfs</i>	Input array of IMFs to be summed
<i>highNum</i>	Number of high frequency IMFs to sum, starting from IMF1 (indexed at 0)
<i>high</i>	Boolean that determines which class of frequency to sum (default True to sum HF)
<i>residual</i>	Boolean that optionally includes the residual function when summing low frequency IMFs (default False to disinclude residual)

Returns

1D numpy.ndarray of summed IMFs

5.80.1.3 plot_imfs()

```
def skdiscovery.visualization.emd_plot.plot_imfs (
    rawData,
    imfs,
    toPlot = [],
    mainTitle = 'IMFs',
    show = True,
    figsize = (12,10) )
```

Plots raw data and IMFs in a subplot grid (n Imfs [rows] x 1 [col])

Parameters

<i>rawData</i>	Input data for plotting
<i>imfs</i>	Input array of IMFs for plotting
<i>toPlot</i>	List of which IMFs to plot (default is all)
<i>show</i>	Boolean to show plot immediately after plot creation
<i>figsize</i>	Size of figure

5.80.1.4 plot_imfs_noise()

```
def skdiscovery.visualization.emd_plot.plot_imfs_noise (
    imfs,
    guessType = 'high',
    noiseNum = 2,
    collage = False,
    show = True )
```

Plots assumed noise from IMF summation in a histogram, with overlaid graphs of fit probability distributions to check if assumption can be validated.

Parameters

<i>imfs</i>	Input array of IMFs to be summed
<i>guessType</i>	String of noise guess type ('high' or 'low' are possibilities)
<i>noiseNum</i>	Number of IMFs to sum
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Array of plotted noise

5.80.1.5 `plot_imfs_split()`

```
def skdiscovery.visualization.emd_plot.plot_imfs_split (
    rawData,
    imfs,
    highNum = 2,
    residual = False,
    mainTitle = 'Raw data',
    collage = False,
    show = True )
```

Plots raw data and summed IMFs based on HF/LF cut, can optionally plot the residual separately from LF.

Parameters

<i>rawData</i>	Input data for plotting
<i>imfs</i>	Input array of IMFs for summing and then plotting
<i>highNum</i>	Number of high frequency IMFs to sum, starting from IMF1 (indexed at 0)
<i>residual</i>	Boolean that optionally includes the residual function when summing low frequency IMFs (default False to disinclude residual)
<i>mainTitle</i>	Title string of plot
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Tuple of HF summed data array and LF summed data array

5.80.1.6 plot_imfs_split_comp()

```
def skdiscovery.visualization.emd_plot.plot_imfs_split_comp (
    rawData,
    imfs,
    highNums = [2,
    residual = False,
    plotRaw = True,
    mainTitle = 'Raw data',
    collage = False,
    show = True )
```

Like plot_imfs_split, plots raw data and summed IMFs based on two HF/LF cuts.

Parameters

<i>rawData</i>	Input data for plotting
<i>imfs</i>	Input array of IMFs for summing and then plotting
<i>highNums</i>	Number of high frequency IMFs to sum and compare
<i>residual</i>	Boolean that optionally includes the residual function when summing low frequency IMFs (default False to disinclude residual)
<i>plotRaw</i>	Boolean to optionally disinclude raw data plot above IMF summation comparison
<i>mainTitle</i>	Title string of plot
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Tuple of both HF summed data arrays and borh LF summed data arrays

5.80.1.7 run_plotImfs()

```
def skdiscovery.visualization.emd_plot.run_plotImfs (
    inData,
    imfs = None,
    nbsym = False,
    toPlot = [],
    mainTitle = 'IMFs',
    show = True,
    figsize = (12,10) )
```

Wrapper for plot_imfs.

Parameters

<i>inData</i>	Input data for plotting
---------------	-------------------------

Parameters

<i>imfs</i>	Input array of IMFs for plotting
<i>nbsym</i>	Boolean that would add extra data points near boundaries when calculating; breaks some datasets unless False
<i>toPlot</i>	List of which IMFs to plot (default is all)
<i>show</i>	Boolean to show plot immediately after plot creation

5.80.1.8 run_plotImfsNoise()

```
def skdiscovery.visualization.emd_plot.run_plotImfsNoise (
    inData,
    imfs = None,
    nbsym = False,
    noiseNum = 2,
    guessType = 'high',
    show = True )
```

Wrapper for plot_imfs_noise.

Parameters

<i>inData</i>	Input data for plotting
<i>imfs</i>	Input array of IMFs to be summed
<i>nbsym</i>	Boolean that would add extra data points near boundaries when calculating; breaks some datasets unless False
<i>guessType</i>	String of noise guess type ('high' or 'low' are possibilities)
<i>noiseNum</i>	Number of IMFs to sum
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Array of noise data values

5.80.1.9 run_plotImfsSplit()

```
def skdiscovery.visualization.emd_plot.run_plotImfsSplit (
    inData,
    imfs = None,
    nbsym = False,
```

```

    highNum = 2,
    residual = False,
    mainTitle = 'Raw data',
    collage = False,
    show = True )

```

Wrapper for plot_imfs_split.

Parameters

<i>inData</i>	Input data for plotting
<i>imfs</i>	Input array of IMFs for summing and then plotting
<i>nbsym</i>	Boolean that would add extra data points near boundaries when calculating; breaks some datasets unless False
<i>highNum</i>	Number of high frequency IMFs to sum, starting from IMF1 (indexed at 0)
<i>residual</i>	Boolean that optionally includes the residual function when summing low frequency IMFs (default False to disinclude residual)
<i>mainTitle</i>	Title string of plot
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Tuple of HF summed data array and LF summed data array

5.80.1.10 run_plotImfsSplitComp()

```

def skdiscovery.visualization.emd_plot.run_plotImfsSplitComp (
    inData,
    imfs = None,
    nbsym = False,
    highNums = [2,
    residual = False,
    plotRaw = True,
    mainTitle = 'Raw data',
    collage = False,
    show = True )

```

Wrappper for plot_imfs_split_comp.

Parameters

<i>inData</i>	Input data for plotting
<i>imfs</i>	Input array of IMFs for summing and then plotting
<i>nbsym</i>	Boolean that would add extra data points near boundaries when calculating; breaks some datasets unless False
<i>highNums</i>	Number of high frequency IMFs to sum and compare

Parameters

<i>residual</i>	Boolean that optionally includes the residual function when summing low frequency IMFs (default False to disinclude residual)
<i>plotRaw</i>	Boolean to optionally disinclude raw data plot above IMF summation comparison
<i>mainTitle</i>	Title string of plot
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Tuple of both HF summed data arrays and both LF summed data arrays

5.80.1.11 run_plotImfsSplitNoise()

```
def skdiscovery.visualization.emd_plot.run_plotImfsSplitNoise (
    inData,
    imfs = None,
    nbsym = False,
    highNum = 2,
    residual = False,
    mainTitle = 'Raw data',
    noiseNum = 2,
    guessType = 'high',
    show = False )
```

Wrapper for both plot_imfs_split and plot_imfs_noise.

Parameters

<i>inData</i>	Input data for plotting
<i>imfs</i>	Input array of IMFs for summing and then plotting
<i>nbsym</i>	Boolean that would add extra data points near boundaries when calculating; breaks some datasets unless False
<i>highNum</i>	Number of high frequency IMFs to sum
<i>residual</i>	Boolean that optionally includes the residual function when summing low frequency IMFs (default False to disinclude residual)
<i>mainTitle</i>	Title string of plot
<i>guessType</i>	String of noise guess type ('high' or 'low' are possibilities)
<i>noiseNum</i>	Number of IMFs to sum
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Tuple of split tuple and noise array

5.81 skdiscovery.visualization.fourier_plot Namespace Reference**Functions**

- def `calc_DFT` (`t`, `y`)
Calculates discrete Fourier transform using np.fft.fft.
- def `plot_DFT` (`tIndex`, `yData`, `collage=False`, `show=True`, `suptitle=""`, `hori=True`)
Plots input data and Fourier transformed coefficients in a subplot grid.
- def `run_plotDFT` (`inData`, `inIndex=None`, `collage=False`, `show=True`, `suptitle=""`, `hori=True`)
Wrapper for plot_DFT.

5.81.1 Function Documentation**5.81.1.1 calc_DFT()**

```
def skdiscovery.visualization.fourier_plot.calc_DFT (
    t,
    y )
```

Calculates discrete Fourier transform using np.fft.fft.

Parameters

<code>t</code>	Time array
<code>y</code>	Y (data amplitude) array

Returns

Tuple of post-FT frequencies and coefficients

5.81.1.2 plot_DFT()

```
def skdiscovery.visualization.fourier_plot.plot_DFT (
    tIndex,
    yData,
```

```

    collage = False,
    show = True,
    subtitle = '',
    hori = True )

```

Plots input data and Fourier transformed coefficients in a subplot grid.

Parameters

<i>tIndex</i>	Input time index for series
<i>yData</i>	Input data amplitude
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation
<i>subtitle</i>	Optional string to add as a plot title
<i>hori</i>	Boolean that optionally changes the orientation of the subplot configuration

5.81.1.3 run_plotDFT()

```

def skdiscovery.visualization.fourier_plot.run_plotDFT (
    inData,
    inIndex = None,
    collage = False,
    show = True,
    subtitle = '',
    hori = True )

```

Wrapper for plot_DFT.

Parameters

<i>inData</i>	Input data for plotting
<i>inIndex</i>	Possible input index to use in calculating DFT
<i>collage</i>	Boolean that can optionally return certain plot parameters for external usage
<i>show</i>	Boolean to show plot immediately after plot creation
<i>subtitle</i>	Optional string to add as a plot title
<i>hori</i>	Boolean that optionally changes the orientation of the subplot configuration

5.82 skdiscovery.visualization.linear_decomposition_plot Namespace Reference

Functions

- def [lin_trend](#) (inData)

- Calculates a linear polynomial fit and evaluates.*
- def `calc_lin_interp` (inData, iterStep=100)
Calculates a piecewise linear interpolated fit for some data.
- def `plot_lin_trend` (inData, plotIndex=None, show=True)
Plots a linear linear trend against its source data.
- def `plot_lin_interp` (inData, interps=None, plotIndex=None, iterSteps=[100], pRange=[], mainTitle='Piecewise Decomposition', plotReal=True, show=True)
Plots linear interpolation against its source data.
- def `plot_lin_slope` (inData, interps=None, plotIndex=None, mainTitle='Piecewise Decomposition and Slopes', iterSteps=[100], pRange=[], plotReal=True, show=True)
Plots raw data, linear interpolated data, and interpolated slope.

5.82.1 Function Documentation

5.82.1.1 `calc_lin_interp()`

```
def skdiscovery.visualization.linear_decomposition_plot.calc_lin_interp (
    inData,
    iterStep = 100 )
```

Calculates a piecewise linear interpolated fit for some data.

Parameters

<i>inData</i>	Input data to fit
<i>iterStep</i>	Number of data points per interpolation step

Returns

Array of interpolated values

5.82.1.2 `lin_trend()`

```
def skdiscovery.visualization.linear_decomposition_plot.lin_trend (
    inData )
```

Calculates a linear polynomial fit and evaluates.

Parameters

<i>inData</i>	Input data to fit
---------------	-------------------

Returns

Array of evaluated points for the linear fit

5.82.1.3 plot_lin_interp()

```
def skdiscovery.visualization.linear_decomposition_plot.plot_lin_interp (
    inData,
    interps = None,
    plotIndex = None,
    iterSteps = [100],
    pRange = [],
    mainTitle = 'Piecewise Decomposition',
    plotReal = True,
    show = True )
```

Plots linear interpolation against its source data.

Parameters

<i>inData</i>	Input data to fit and plot
<i>interps</i>	Optional interpolated data to be plotted, will be made if not given
<i>plotIndex</i>	Optional index array to pass for plotting
<i>iterSteps</i>	List of iterStep values to calculate/plot
<i>pRange</i>	Range over which to plot, defaults to start and end of original data
<i>mainTitle</i>	Optional string plot title
<i>plotReal</i>	Boolean variable to optionally disinclude source data
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Multidimensional array of interpreted data values

5.82.1.4 plot_lin_slope()

```
def skdiscovery.visualization.linear_decomposition_plot.plot_lin_slope (
    inData,
    interps = None,
    plotIndex = None,
    mainTitle = 'Piecewise Decomposition and Slopes',
    iterSteps = [100],
    pRange = [],
    plotReal = True,
    show = True )
```

Plots raw data, linear interpolated data, and interpolated slope.

Parameters

<i>inData</i>	Input data to fit and plot
<i>interps</i>	Optional interpolated data to be plotted, will be made if not given
<i>plotIndex</i>	Optional index array to pass for plotting
<i>iterSteps</i>	List of iterStep values to calculate/plot
<i>pRange</i>	Range over which to plot, defaults to start and end of original data
<i>mainTitle</i>	Optional string plot title
<i>plotReal</i>	Boolean variable to optionally disinclude source data
<i>show</i>	Boolean to show plot immediately after plot creation

Returns

Tuple of interpolated values array and corresponding gradient array

5.82.1.5 plot_lin_trend()

```
def skdiscovery.visualization.linear_decomposition_plot.plot_lin_trend (
    inData,
    plotIndex = None,
    show = True )
```

Plots a linear linear trend against its source data.

Parameters

<i>inData</i>	Input data to fit and plot
<i>plotIndex</i>	Optional index array to pass for plotting
<i>show</i>	Boolean to show plot immediately after plot creation

5.83 skdiscovery.visualization.multi_ca_plot Namespace Reference

Functions

- def [multiCaPlot](#) (pipeline, mogiFlag=False, offset=.15, direction='H', pca_comp=0, scaleFactor=2.5, map_res='i')
The multiCaPlot function generates a geographic eigenvector plot of several pipeline runs.

5.83.1 Function Documentation

5.83.1.1 multiCaPlot()

```
def skdiscovery.visualization.multiCaPlot (
    pipeline,
    mogiFlag = False,
    offset = .15,
    direction = 'H',
    pca_comp = 0,
    scaleFactor = 2.5,
    map_res = 'i' )
```

The multiCaPlot function generates a geographic eigenvector plot of several pipeline runs.

This function plots multiple pipeline runs over perturbed pipeline parameters. The various perturbations are plotted more transparently (alpha=.5), while the median eigen_vector and Mogi inversion are plotted in solid blue and red

Parameters

<i>pipeline</i>	The pipeline object with multiple runs
<i>mogiFlag</i>	Flag to indicate plotting the Mogi source as well as the PCA
<i>offset</i>	Offset for padding the corners of the generated map
<i>direction</i>	Indicates the eigenvectors to plot. Only Horizontal component is currently supported ('H')
<i>pca_comp</i>	Choose the PCA component to use (integer)
<i>scaleFactor</i>	Size of the arrow scaling factor : Map data resolution for Basemap ('c', 'i', 'h', 'f', or None)

5.84 skdiscovery.visualization.multi_dist Namespace Reference

Functions

- def [calc_distance_map](#) (pipeline, ap_name, ca_name, ca_type, plotFlag=True, histIdx=False, fontsize=10)
Calculates distances/similarities between pipeline runs.

5.84.1 Function Documentation

5.84.1.1 calc_distance_map()

```
def skdiscovery.visualization.calc_distance_map (
    pipeline,
    ap_name,
    ca_name,
    ca_type,
    plotFlag = True,
```

```
histIdx = False,
fontsize = 10 )
```

Calculates distances/similarities between pipeline runs.

Optionally visualizes the result as a seaborn clustermap for PBO pipelines (requires multiple stations)

Calculates the square root of the summed squared differences between eigenvectors. Only works, because of internal assumptions, on pipelines with multiple stations Returns the distances as a pandas dataframe

Parameters

<i>pipeline</i>	Pipeline to analyze.
<i>ap_name</i>	Name of the pipeline item that is being perturbed
<i>ca_name</i>	Name of the pipeline item used as the comparison metric for calculating the distance
<i>ca_type</i>	Type of comparison metric [PCA for PCA, MogiSource for Mogi Source, MogiVector for Mogi vectors]
<i>plotFlag</i>	Boolean flag for plotting the clustermap of distances
<i>histIdx</i>	Flag for returning the perturbed pipeline item parameters
<i>fontsize</i>	Fontsize adjustments

Returns

cg: The generated clustermap of the calculated distances/similarities
dist_mat: A matrix of the calculated distances/similarities
history: The record of the perturbed pipeline item parameters

5.85 skdiscovery.visualization.spherical_voronoi Namespace Reference

Functions

- def [sphericalToXYZ](#) (lat, lon, radius=1)
Convert spherical coordinates to x,y,z.
- def [xyzToSpherical](#) (x, y, z)
Convert x,y,z to spherical coordinates.
- def [find_match](#) (region_index, region_list)
Find neighboring regions.
- def [getVoronoiCollection](#) (data, lat_name, lon_name, bmap=None, v_name=None, full_sphere=False, max_v=.3, min_v=-0.3, cmap=matplotlib.cm.get_cmap('jet'), test_point=None, proj1=None, proj2=None, kwargs)
Perform a Spherical Voronoi Tessellation on the input data.

5.85.1 Function Documentation

5.85.1.1 find_match()

```
def skdiscovery.visualization.spherical_voronoi.find_match (
    region_index,
    region_list )
```

Find neighboring regions.

Parameters

<i>region_index</i>	Numeric index of region to find matches for (number between 0 and len(vertices))
<i>region_list</i>	list of lists of vertices that define regions

Returns

Numeric indices of regions that border the region specified by region_index

5.85.1.2 getVoronoiCollection()

```
def skdiscovery.visualization.spherical_voronoi.getVoronoiCollection (
    data,
    lat_name,
    lon_name,
    bmap = None,
    v_name = None,
    full_sphere = False,
    max_v = .3,
    min_v = -0.3,
    cmap = matplotlib.cm.get_cmap('jet'),
    test_point = None,
    proj1 = None,
    proj2 = None,
    kwargs )
```

Perform a Spherical Voronoi Tessellation on the input data.

In the case where the data is restricted to one part of the globe, a polygon will not be returned for all objects, as matplotlib polygons won't be able to stretch over half the globe.

Parameters

<i>data</i>	Input pandas data frame
<i>lat_name</i>	Name of latitude column
<i>lon_name</i>	Name of longitude column
<i>bmap</i>	Basemap instance used to convert from lat, lon coordinates to projection coordinates
<i>v_name</i>	Name of value column. Use this to color each cell according to a value.

Parameters

<i>full_sphere</i>	Set to true if the data spans the entire globe. If false, a fictional point is created during tessellation and removed later to work around issues when polygons are suppose to span the over half the globe.
<i>max_v</i>	Specify a maximum value to use when assigning values to the tessellation
<i>min_v</i>	Specify a minimum value to use when assigning values to the tessellation
<i>cmap</i>	Matplotlib color map to use
<i>test_point</i>	Tuple containing the latitude and longitude of the ficitonal point to used to remove polygons that wrap around the earth. If none, a point is automatically chosen
<i>proj1</i>	PyProj projection of input coordinates
<i>proj2</i>	PyProj projection of sphere

Returns

Matplotlib patch collection of tessellation, scipy.spatial.SphericalVoronoi object, integer index of objects in patch collection.

5.85.1.3 sphericalToXYZ()

```
def skdiscovery.visualization.spherical_voronoi.sphericalToXYZ (
    lat,
    lon,
    radius = 1 )
```

Convert spherical coordinates to x,y,z.

Parameters

<i>lat</i>	Latitude, scalar or array
<i>lon</i>	Longitude, scalar or array
<i>radius</i>	Sphere's radius

Returns

Numpy array of x,y,z coordinates

5.85.1.4 xyzToSpherical()

```
def skdiscovery.visualization.spherical_voronoi.xyzToSpherical (
    x,
    y,
    z )
```

Convert x,y,z to spherical coordinates.

Parameters

<i>x</i>	Cartesian coordinate x
<i>y</i>	Cartesian coordinate y
<i>z</i>	Cartesian coordinate z

Returns

numpy array of latitude,longitude, and radius

5.86 skdiscovery.visualization.spiral_plot Namespace Reference

Functions

- def [plot_spiral](#) (plotData, plotIndex, T, mainTitle='Spiral plot', barLabel='Amplitude', plotTS=False, show=True)
Plots data in a spiral pattern via a polar plot.
- def [run_spiral](#) (inData, period, inIndex=None, mainTitle='Spiral plot', barLabel='Amplitude', plotTS=False, show=True)
Wrapper for plot_spiral.
- def [run_spiralInteractive](#) (inData, period, pParams=[], inIndex=None, mainTitle='Spiral plot', barLabel='Amplitude', plotTS=False)
Wrapper for plot_spiral that is interactive when used in Jupyter notebooks.

5.86.1 Function Documentation

5.86.1.1 plot_spiral()

```
def skdiscovery.visualization.spiral_plot.plot_spiral (
    plotData,
    plotIndex,
    T,
    mainTitle = 'Spiral plot',
    barLabel = 'Amplitude',
    plotTS = False,
    show = True )
```

Plots data in a spiral pattern via a polar plot.

Parameters

<i>plotData</i>	Input data values/amplitudes
<i>plotIndex</i>	Input index (series time coordinates)
<i>period</i>	Period value with which to wrap data around the plot

5.86.1.2 run_spiral()

```
def skdiscovery.visualization.spiral_plot.run_spiral (
    inData,
    period,
    inIndex = None,
    mainTitle = 'Spiral plot',
    barLabel = 'Amplitude',
    plotTS = False,
    show = True )
```

Wrapper for plot_spiral.

Parameters

<i>inData</i>	Input data to use in plot
<i>period</i>	Period value with which to wrap data around the plot
<i>inIndex</i>	Input index (series time coordinates)
<i>plotTS</i>	Optional flag to plot the time series of the data in a separate window
<i>show</i>	Boolean to show plot immediately after plot creation

5.86.1.3 run_spiralInteractive()

```
def skdiscovery.visualization.spiral_plot.run_spiralInteractive (
    inData,
    period,
    pParams = [],
    inIndex = None,
    mainTitle = 'Spiral plot',
    barLabel = 'Amplitude',
    plotTS = False )
```

Wrapper for plot_spiral that is interactive when used in Jupyter notebooks.

Parameters

<i>inData</i>	Input data to use in plot
<i>period</i>	Period value with which to wrap data around the plot
<i>pParams</i>	List of plot's period parameters [min, max, step] necessary for interactive
<i>inIndex</i>	Input index (series time coordinates)
<i>plotTS</i>	Optional flag to plot the time series of the data in a separate window

5.87 skdiscovery.visualization.vis_utils Namespace Reference

Functions

- def [lin_trend](#) (inData, toReturn='eval')
- def [index_scale](#) (toScale, endRange=[])
- def [block_output](#) ()
- def [enable_output](#) ()
- def [mod_data](#) (inData, inIndex=None, makeType=None)
modifies data for run_spiral so that plotted data is uniform

Variables

- list [types](#) = [int, float, complex, np.float32, np.float64, np.int32, np.int64, np.complex64, np.complex128,]
- dictionary [coldict](#) = {0 : 'C0', 1 : 'C1', 2 : 'C2', 3 : 'C3', 4 : 'C4', 5 : 'C5', 6 : 'C6', 7 : 'C7', 8 : '#92C7Ed', 9 : '#FFBB80', 10 : '#9BE49B', 11 : '#EB9393', 12 : '#C0A6D8', 13 : '#D2B3AC', 14 : '#E995D0', 15 : '#BFBFBF'}

5.87.1 Function Documentation

5.87.1.1 [block_output\(\)](#)

```
def skdiscovery.visualization.vis_utils.block_output ( )
```

5.87.1.2 [enable_output\(\)](#)

```
def skdiscovery.visualization.vis_utils.enable_output ( )
```

5.87.1.3 [index_scale\(\)](#)

```
def skdiscovery.visualization.vis_utils.index_scale (
    toScale,
    endRange = [] )
```


5.87.1.4 lin_trend()

```
def skdiscovery.visualization.vis_utils.lin_trend (
    inData,
    toReturn = 'eval' )
```

5.87.1.5 mod_data()

```
def skdiscovery.visualization.vis_utils.mod_data (
    inData,
    inIndex = None,
    makeType = None )
```

modifies data for run_spiral so that plotted data is uniform

Parameters

<i>inData</i>	data values to be used as intensity
<i>inIndex</i>	data values to be used as radial and angular components (once period is applied)
<i>makeType</i>	variable tied to makeIndex which will create different types of index if necessary

5.87.2 Variable Documentation

5.87.2.1 coldict

```
dictionary skdiscovery.visualization.vis_utils.coldict = {0 : 'C0', 1 : 'C1', 2 : 'C2', 3 : 'C3', 4 : 'C4', 5 : 'C5', 6 : 'C6', 7 : 'C7', 8 : '#92C7Ed', 9 : '#FFBB80', 10 : '#9BE49B', 11 : '#EB9393', 12 : '#C0A6D8', 13 : '#D2B3AC', 14 : '#E995D0', 15 : '#BFBFBF'}
```

5.87.2.2 types

```
list skdiscovery.visualization.vis_utils.types = [int, float, complex, np.float32, np.float64, np.int32, np.int64, np.complex64, np.complex128,]
```

5.88 skdiscovery.visualization.wavelets_plot Namespace Reference

Functions

- def `calc_wp_deconstruct` (calcData, wavelet=None)
simple function to calculate a wavelet deconstruction
- def `calc_wp_reconstruct` (deconPacket=None, calcData=None, wavelet=None, reconNodes=[])
- def `plot_wp_deconstruct` (deconPacket, deconNodes=[], mainTitle='Wavelet Deconstruction', plotRaw=True, show=True)
- def `plot_wp_showall` (deconPacket, deconNodes=[], mainTitle='Individual Wavelet Nodes', plotRaw=True, show=True)
- def `plot_wp_reconstruct` (reconPacket, calcData, mainTitle='Wavelet Reconstruction', plotRaw=True, show=True)
- def `run_plotWPDecon` (inData, wavelet=None, deconNodes=[], mainTitle='Wavelet Deconstruction', plot←Raw=True, show=True)
- def `run_plotWPRecon` (inData, wavelet=None, reconNodes=[], mainTitle='Individual Wavelet Nodes', plot←Raw=True, show=True)
- def `run_plotWPShowall` (inData, wavelet=None, deconNodes=[], mainTitle='Wavelet Reconstruction', plot←Raw=True, show=True)

5.88.1 Function Documentation

5.88.1.1 `calc_wp_deconstruct()`

```
def skdiscovery.visualization.wavelets_plot.calc_wp_deconstruct (
    calcData,
    wavelet = None )
```

simple function to calculate a wavelet deconstruction

5.88.1.2 `calc_wp_reconstruct()`

```
def skdiscovery.visualization.wavelets_plot.calc_wp_reconstruct (
    deconPacket = None,
    calcData = None,
    wavelet = None,
    reconNodes = [] )
```

5.88.1.3 plot_wp_deconstruct()

```
def skdiscovery.visualization.wavelets_plot.plot_wp_deconstruct (
    deconPacket,
    deconNodes = [],
    mainTitle = 'Wavelet Deconstruction',
    plotRaw = True,
    show = True )
```

5.88.1.4 plot_wp_reconstruct()

```
def skdiscovery.visualization.wavelets_plot.plot_wp_reconstruct (
    reconPacket,
    calcData,
    mainTitle = 'Wavelet Reconstruction',
    plotRaw = True,
    show = True )
```

5.88.1.5 plot_wp_showall()

```
def skdiscovery.visualization.wavelets_plot.plot_wp_showall (
    deconPacket,
    deconNodes = [],
    mainTitle = 'Individual Wavelet Nodes',
    plotRaw = True,
    show = True )
```

5.88.1.6 run_plotWPDecon()

```
def skdiscovery.visualization.wavelets_plot.run_plotWPDecon (
    inData,
    wavelet = None,
    deconNodes = [],
    mainTitle = 'Wavelet Deconstruction',
    plotRaw = True,
    show = True )
```

5.88.1.7 run_plotWPRecon()

```
def skdiscovery.visualization.wavelets_plot.run_plotWPRecon (
    inData,
    wavelet = None,
    reconNodes = [],
    mainTitle = 'Individual Wavelet Nodes',
    plotRaw = True,
    show = True )
```

5.88.1.8 run_plotWPShowall()

```
def skdiscovery.visualization.wavelets_plot.run_plotWPShowall (
    inData,
    wavelet = None,
    deconNodes = [],
    mainTitle = 'Wavelet Reconstruction',
    plotRaw = True,
    show = True )
```


Chapter 6

Class Documentation

6.1 skdiscovery.data_structure.table.filters.AntennaOffset Class Reference

Applies corrections to fix offsets in PBO GPS data induced by antenna changes.

Inheritance diagram for skdiscovery.data_structure.table.filters.AntennaOffset:



Public Member Functions

- def `__init__` (self, str_description, [antenna_data](#), `min_diff`=0.0, `column_list`=None)
Initialize [AntennaOffset](#) function.
- def [process](#) (self, obj_data)
Applies the function to the data, updating in place.

Public Attributes

- [antenna_data](#)
- [column_list](#)
- [min_diff](#)

6.1.1 Detailed Description

Applies corrections to fix offsets in PBO GPS data induced by antenna changes.

6.1.2 Constructor & Destructor Documentation

6.1.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.AntennaOffset.__init__ (
    self,
    str_description,
    antenna_data,
    min_diff = 0.0,
    column_list = None )
```

Initialize [AntennaOffset](#) function.

Parameters

<i>str_description</i>	String describing the filter
<i>antenna_data</i>	Data containing the log of antenna changes
<i>min_diff</i>	Difference in position needed to be considered an offset
<i>column_list</i>	Names of the columns to apply the function to

6.1.3 Member Function Documentation

6.1.3.1 `process()`

```
def skdiscovery.data_structure.table.filters.AntennaOffset.process (
    self,
    obj_data )
```

Applies the function to the data, updating in place.

Parameters

<i>obj_data</i>	Table data wrapper
-----------------	--------------------

6.1.4 Member Data Documentation

6.1.4.1 antenna_data

```
skdiscovery.data_structure.table.filters.AntennaOffset.antenna_data
```

6.1.4.2 column_list

```
skdiscovery.data_structure.table.filters.AntennaOffset.column_list
```

6.1.4.3 min_diff

```
skdiscovery.data_structure.table.filters.AntennaOffset.min_diff
```


The documentation for this class was generated from the following file:

- data_structure/table/filters/[antenna_offset.py](#)

6.2 skdiscovery.data_structure.table.filters.CalibrateGRACE Class Reference

Calibrate Grace Data.

Inheritance diagram for skdiscovery.data_structure.table.filters.CalibrateGRACE:



Public Member Functions

- def `__init__` (self, `str_description`, `ewd_column_name`='EWD', `round_dates`=True)
Initialize GRACE calibration filter.
- def `process` (self, `obj_data`)
Calibrates GRACE, updating in place.
- def `perturbParams` (self)
choose other random value for all parameters
- def `resetParams` (self)
set all parameters to initial value
- def `__str__` (self)
String representation of object.
- def `getMetadata` (self)
Retrieve metadata about filter.

Public Attributes

- [ewd_column_name](#)
- [round_dates](#)
- [str_description](#)
- [ap_paramList](#)
- [ap_paramNames](#)

6.2.1 Detailed Description

Calibrate Grace Data.

Averages the three solutions and applies a scale factor

6.2.2 Constructor & Destructor Documentation

6.2.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.CalibrateGRACE.__init__ (
    self,
    str_description,
    ewd_column_name = 'EWD',
    round_dates = True )
```

Initialize GRACE calibration filter.

Parameters

<i>str_description</i>	String describing filter
<i>ewd_column_name</i>	Name of new column for the calibrated GRACE data
<i>round_dates</i>	Option for rounding to dates to the nearest day

6.2.3 Member Function Documentation

6.2.3.1 `__str__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String representation of object.

Returns

String listing all current parameters

6.2.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.2.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.2.3.4 process()

```
def skdiscovery.data_structure.table.filters.CalibrateGRACE.process (
    self,
    obj_data )
```

Calibrates GRACE, updating in place.

Parameters

<i>obj_data</i>	Table data wrapper
-----------------	--------------------

6.2.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.2.4 Member Data Documentation

6.2.4.1 ap_paramList

skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]

6.2.4.2 ap_paramNames

skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]

6.2.4.3 ewd_column_name

skdiscovery.data_structure.table.filters.CalibrateGRACE.ewd_column_name

6.2.4.4 round_dates

skdiscovery.data_structure.table.filters.CalibrateGRACE.round_dates

6.2.4.5 str_description

skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]


The documentation for this class was generated from the following file:

- data_structure/table/filters/[calibrate_py](#)

6.3 skdiscovery.data_structure.table.generators.CatalogGenerator Class Reference

In Development Generates galaxy catalogs for use in DiscoveryPipeline

Inheritance diagram for skdiscovery.data_structure.table.generators.CatalogGenerator:



Public Member Functions

- def `__init__` (self, ap_paramList, ra1, dec1, ra2, dec2, background_density, z)
- def `output` (self)
Generates galaxy catalog.
- def `nfw_cumulative` (self, R)
Cumulative radial NFW distribution.
- def `inverse_nfw_cumulative` (self, p)
inverse of radial nfw cumulative distribution

Public Attributes

- ra1
- dec1
- ra2
- dec2
- background_density
- z

6.3.1 Detailed Description

In Development Generates galaxy catalogs for use in DiscoveryPipeline

6.3.2 Constructor & Destructor Documentation

6.3.2.1 `__init__()`

```

def skdiscovery.data_structure.table.generators.CatalogGenerator.__init__ (
    self,
    ap_paramList,
    ra1,
    dec1,
    ra2,
    dec2,
    background_density,
    z )
  
```

Parameters

<i>ap_paramList[seed]</i>	Seed for random number generator
<i>ra1</i>	Left right ascension
<i>dec1</i>	Bottom declination
<i>ra2</i>	Right right ascension
<i>dec2</i>	Top declination
<i>background_density</i>	galaxy background density in galaxies/square degree
<i>z</i>	Redshift of galaxy cluster

6.3.3 Member Function Documentation

6.3.3.1 `inverse_nfw_cumulative()`

```
def skdiscovery.data_structure.table.generators.CatalogGenerator.inverse_nfw_cumulative (
    self,
    p )
```

inverse of radial nfw cumulative distribution

Parameters

<i>p</i>	Probability
----------	-------------

Returns

float: Radius corresponding to probability p

6.3.3.2 `nfw_cumulative()`

```
def skdiscovery.data_structure.table.generators.CatalogGenerator.nfw_cumulative (
    self,
    R )
```

Cumulative radial NFW distribution.

Parameters

<i>R</i>	Radius
----------	--------

Returns

float: Probability of being within R

6.3.3.3 output()

```
def skdiscovery.data_structure.table.generators.CatalogGenerator.output (
    self )
```

Generates galaxy catalog.

Returns

DataWrapper: Table data wrapper of galaxy catalog

6.3.4 Member Data Documentation**6.3.4.1 background_density**

```
skdiscovery.data_structure.table.generators.CatalogGenerator.background_density
```

6.3.4.2 dec1

```
skdiscovery.data_structure.table.generators.CatalogGenerator.dec1
```

6.3.4.3 dec2

```
skdiscovery.data_structure.table.generators.CatalogGenerator.dec2
```

6.3.4.4 ra1

```
skdiscovery.data_structure.table.generators.CatalogGenerator.ra1
```

6.3.4.5 ra2

`skdiscovery.data_structure.table.generators.CatalogGenerator.ra2`

6.3.4.6 z

`skdiscovery.data_structure.table.generators.CatalogGenerator.z`


The documentation for this class was generated from the following file:

- [data_structure/table/generators/catalog_generator.py](#)

6.4 skdiscovery.data_structure.table.filters.CombineColumns Class Reference

Create a new column by selecting data from a column.

Inheritance diagram for `skdiscovery.data_structure.table.filters.CombineColumns`:



Public Member Functions

- `def __init__(self, str_description, column_1, column_2, new_column_name)`
Initialize a `CombineColumns` object.
- `def process(self, obj_data)`
Apply combine column filter to data set, operating on the `data_obj`.
- `def perturbParams(self)`
choose other random value for all parameters
- `def resetParams(self)`
set all parameters to initial value
- `def __str__(self)`
String representation of object.
- `def getMetadata(self)`
Retrieve metadata about filter.

Public Attributes

- [column_1](#)
- [column_2](#)
- [new_column_name](#)
- [str_description](#)
- [ap_paramList](#)
- [ap_paramNames](#)

6.4.1 Detailed Description

Create a new column by selecting data from a column.

Fills in any missing values using a second column

6.4.2 Constructor & Destructor Documentation

6.4.2.1 __init__()

```
def skdiscovery.data_structure.table.filters.CombineColumns.__init__ (
    self,
    str_description,
    column_1,
    column_2,
    new_column_name )
```

Initialize a [CombineColumns](#) object.

Parameters

<i>str_description</i>	String describing filter
<i>column_1</i>	Name of primary column
<i>column_2</i>	Name of secondary column to be used when data from the primary column is not available
<i>new_column_name</i>	Name of resulting column

6.4.3 Member Function Documentation

6.4.3.1 `__str__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String representation of object.

Returns

String listing all current parameters

6.4.3.2 `getMetadata()`

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.4.3.3 `perturbParams()`

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.4.3.4 `process()`

```
def skdiscovery.data_structure.table.filters.CombineColumns.process (
    self,
    obj_data )
```

Apply combine column filter to data set, operating on the data_obj.

Parameters

<code>obj_data</code>	Table data wrapper.
-----------------------	---------------------

6.4.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.4.4 Member Data Documentation

6.4.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.4.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.4.4.3 column_1

```
skdiscovery.data_structure.table.filters.CombineColumns.column_1
```

6.4.4.4 column_2

```
skdiscovery.data_structure.table.filters.CombineColumns.column_2
```

6.4.4.5 new_column_name

```
skdiscovery.data_structure.table.filters.CombineColumns.new_column_name
```

6.4.4.6 str_description

skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]


The documentation for this class was generated from the following file:

- data_structure/table/filters/[combine_columns.py](#)

6.5 skdiscovery.data_structure.table.analysis.Correlate Class Reference

Computes the correlation for table data and stores the result as a matrix.

Inheritance diagram for skdiscovery.data_structure.table.analysis.Correlate:



Public Member Functions

- def `__init__` (self, str_description, [column_names](#)=None, [local_match](#)=False, correlation_type='pearson')
Initialize [Correlate](#) analysis item for use on tables.
- def [process](#) (self, obj_data)
Computes the correlation between columns and stores the results in obj_

Public Attributes

- [column_names](#)
- [local_match](#)
- [corr_type](#)

6.5.1 Detailed Description

Computes the correlation for table data and stores the result as a matrix.

6.5.2 Constructor & Destructor Documentation

6.5.2.1 `__init__()`

```
def skdiscovery.data_structure.table.analysis.Correlate.__init__ (
    self,
    str_description,
    column_names = None,
    local_match = False,
    correlation_type = 'pearson' )
```

Initialize [Correlate](#) analysis item for use on tables.

Parameters

<i>str_description</i>	String describing analysis item
<i>column_names</i>	List of column names to correlate
<i>local_match</i>	Only correlate data on the same frames
<i>correlation_type</i>	Type of correlation to be passed to pandas ('pearson', 'kendall', 'spearman')

6.5.3 Member Function Documentation

6.5.3.1 process()

```
def skdiscovery.data_structure.table.analysis.Correlate.process (
    self,
    obj_data )
```

Computes the correlation between columns and stores the results in obj_

Parameters

<i>obj_data</i>	Data wrapper
-----------------	--------------

6.5.4 Member Data Documentation

6.5.4.1 column_names

```
skdiscovery.data_structure.table.analysis.Correlate.column_names
```

6.5.4.2 corr_type

```
skdiscovery.data_structure.table.analysis.Correlate.corr_type
```

6.5.4.3 local_match

`skdiscovery.data_structure.table.analysis.Correlate.local_match`


The documentation for this class was generated from the following file:

- [data_structure/table/analysis/correlate.py](#)

6.6 skdiscovery.data_structure.series.analysis.Correlate Class Reference

Computes the correlation for series data.

Inheritance diagram for `skdiscovery.data_structure.series.analysis.Correlate`:



Public Member Functions

- `def __init__(self, str_description, labels=None, column_names=None)`
Initialize *Correlate* analysis item.
- `def process(self, obj_data)`
Computes the correlation between all the time series.

Public Attributes

- [labels](#)
- [column_names](#)

6.6.1 Detailed Description

Computes the correlation for series data.

Stores the result as a matrix

6.6.2 Constructor & Destructor Documentation

6.6.2.1 __init__()

```
def skdiscovery.data_structure.series.analysis.Correlate.__init__(
    self,
    str_description,
    labels = None,
    column_names = None )
```

Initialize *Correlate* analysis item.

Parameters

<i>str_description</i>	String describing analysis item
<i>labels</i>	List of labels used to select data
<i>column_names</i>	List of column names used to select data

6.6.3 Member Function Documentation

6.6.3.1 process()

```
def skdiscovery.data_structure.series.analysis.Correlate.process (
    self,
    obj_data )
```

Computes the correlation between all the time series.

The results are stored in `obj_data`

Parameters

<i>obj_data</i>	Data wrapper for correlating
-----------------	------------------------------

6.6.4 Member Data Documentation

6.6.4.1 column_names

```
skdiscovery.data_structure.series.analysis.Correlate.column_names
```

6.6.4.2 labels

```
skdiscovery.data_structure.series.analysis.Correlate.labels
```


The documentation for this class was generated from the following file:

- `data_structure/series/analysis/correlate.py`

6.7 skdiscovery.data_structure.generic.accumulators.DataAccumulator Class Reference

Stores a copy of the data in its current state in the pipeline.

Inheritance diagram for skdiscovery.data_structure.generic.accumulators.DataAccumulator:



Public Member Functions

- def `process` (self, obj_data)
Store a copy of the data in the object wrapper results.

6.7.1 Detailed Description

Stores a copy of the data in its current state in the pipeline.

6.7.2 Member Function Documentation

6.7.2.1 process()

```
def skdiscovery.data_structure.generic.accumulators.DataAccumulator.process (
    self,
    obj_data )
```

Store a copy of the data in the object wrapper results.

Parameters

<code>obj_data</code>	Data Wrapper to be copied
-----------------------	---------------------------


The documentation for this class was generated from the following file:

- data_structure/generic/accumulators/[data.py](#)

6.8 skdiscovery.data_structure.table.generators.DataGenerator Class Reference

In Class for generating random data.

Inheritance diagram for skdiscovery.data_structure.table.generators.DataGenerator:



Public Member Functions

- def `__init__` (self, `length`, `args`, `seed=None`, `final_function=None`)
Initialize Random data generator.
- def `output` (self)

Public Attributes

- `length`
- `seed`
- `args`
- `final_function`

6.8.1 Detailed Description

In Class for generating random data.

6.8.2 Constructor & Destructor Documentation

6.8.2.1 `__init__()`

```
def skdiscovery.data_structure.table.generators.DataGenerator.__init__ (
    self,
    length,
    args,
    seed = None,
    final_function = None )
```

Initialize Random data generator.

Parameters

<i>length</i>	Number of rows to generate
<i>*args</i>	Dictionaries containing entries: 'name', 'start', 'end', and optionally 'func'
<i>seed</i>	Seed to use when generating random data
<i>final_function</i>	Final function to call on random data

6.8.3 Member Function Documentation**6.8.3.1 output()**

```
def skdiscovery.data_structure.table.generators.DataGenerator.output (  
    self )
```

6.8.4 Member Data Documentation**6.8.4.1 args**

```
skdiscovery.data_structure.table.generators.DataGenerator.args
```

6.8.4.2 final_function

```
skdiscovery.data_structure.table.generators.DataGenerator.final_function
```

6.8.4.3 length

```
skdiscovery.data_structure.table.generators.DataGenerator.length
```


6.8.4.4 seed

```
skdiscovery.data_structure.table.generators.DataGenerator.seed
```


The documentation for this class was generated from the following file:

- [data_structure/table/generators/data_generator.py](#)

6.9 skdiscovery.data_structure.table.filters.DataRemover Class Reference

Sets specified table data to NaN.

Inheritance diagram for skdiscovery.data_structure.table.filters.DataRemover:



Public Member Functions

- `def __init__(self, str_description, column_names, start=None, end=None, labels=None)`
Initialize *DataRemover*.
- `def process(self, obj_data)`
NaN's data from *DataWrapper*.

Public Attributes

- `labels`
- `column_names`
- `start`
- `end`

6.9.1 Detailed Description

Sets specified table data to NaN.

6.9.2 Constructor & Destructor Documentation

6.9.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.DataRemover.__init__ (
    self,
    str_description,
    column_names,
    start = None,
    end = None,
    labels = None )
```

Initialize [DataRemover](#).

Parameters

<i>str_description</i>	String describing filter
<i>column_names</i>	List of column names to select data to be removed (using None will apply to all columns)
<i>start</i>	Starting index value
<i>end</i>	Ending index value (inclusive)
<i>labels</i>	List of labels used to select data to be removed (using None will apply to all labels)

6.9.3 Member Function Documentation

6.9.3.1 `process()`

```
def skdiscovery.data_structure.table.filters.DataRemover.process (
    self,
    obj_data )
```

NaN's data from DataWrapper.

Parameters

<i>obj_data</i>	Input DataWrapper, will be modified in place
-----------------	--

6.9.4 Member Data Documentation

6.9.4.1 `column_names`

```
skdiscovery.data_structure.table.filters.DataRemover.column_names
```

6.9.4.2 end

```
skdiscovery.data_structure.table.filters.DataRemover.end
```

6.9.4.3 labels

```
skdiscovery.data_structure.table.filters.DataRemover.labels
```

6.9.4.4 start

```
skdiscovery.data_structure.table.filters.DataRemover.start
```


The documentation for this class was generated from the following file:

- data_structure/table/filters/[dataremover.py](#)

6.10 skdiscovery.data_structure.series.filters.DataRemover Class Reference

Sets specified series data to NaN.

Inheritance diagram for skdiscovery.data_structure.series.filters.DataRemover:



Public Member Functions

- def `__init__` (self, str_description, start=None, end=None, labels=None, column_names=None)
Initialize `DataRemover`.
- def `process` (self, obj_data)
NaN's data from `DataWrapper`.

Public Attributes

- `labels`
- `column_names`
- `start`
- `end`

6.10.1 Detailed Description

Sets specified series data to NaN.

6.10.2 Constructor & Destructor Documentation

6.10.2.1 `__init__()`

```
def skdiscovery.data_structure.series.filters.DataRemover.__init__ (
    self,
    str_description,
    start = None,
    end = None,
    labels = None,
    column_names = None )
```

Initialize [DataRemover](#).

Parameters

<i>str_description</i>	String describing filter
<i>start</i>	Starting index value
<i>end</i>	Ending index value (inclusive)
<i>labels</i>	List of labels used to select data to be removed (None will operate on all labels)
<i>column_names</i>	List of column names to select data to be removed (None will operate on all columns)

6.10.3 Member Function Documentation

6.10.3.1 `process()`

```
def skdiscovery.data_structure.series.filters.DataRemover.process (
    self,
    obj_data )
```

NaN's data from DataWrapper.

Parameters

<i>obj_data</i>	Input DataWrapper, which will be modified in place
-----------------	--

6.10.4 Member Data Documentation

6.10.4.1 column_names

`skdiscovery.data_structure.series.filters.DataRemover.column_names`

6.10.4.2 end

`skdiscovery.data_structure.series.filters.DataRemover.end`

6.10.4.3 labels

`skdiscovery.data_structure.series.filters.DataRemover.labels`

6.10.4.4 start

`skdiscovery.data_structure.series.filters.DataRemover.start`


The documentation for this class was generated from the following file:

- `data_structure/series/filters/dataremover.py`

6.11 skdiscovery.data_structure.table.analysis.DBScan Class Reference

Runs [DBScan](#) on table data.

Inheritance diagram for `skdiscovery.data_structure.table.analysis.DBScan`:



Public Member Functions

- def `__init__` (self, str_description, ap_paramList, [column_names](#))
Initialize [DBScan](#) pipeline item.
- def `process` (self, obj_data)
Run [DBScan](#) on data.

Public Attributes

- [column_names](#)

6.11.1 Detailed Description

Runs [DBScan](#) on table data.

Adds cluster information column to data

6.11.2 Constructor & Destructor Documentation

6.11.2.1 `__init__()`

```
def skdiscovery.data_structure.table.analysis.DBScan.__init__ (
    self,
    str_description,
    ap_paramList,
    column_names )
```

Initialize [DBScan](#) pipeline item.

Parameters

<i>str_description</i>	Description of item
<i>ap_paramList[epsilon]</i>	Distance between two nodes for them to be considered connected
<i>ap_paramList[min_points]</i>	Minimum number of points for a cluster
<i>column_names</i>	List of column names to use

6.11.3 Member Function Documentation

6.11.3.1 process()

```
def skdiscovery.data_structure.table.analysis.DBScan.process (
    self,
    obj_data )
```

Run [DBScan](#) on data.

Stores result in data wrapper

```
@param obj_data: Data wrapper to be processed
```

6.11.4 Member Data Documentation

6.11.4.1 column_names

```
skdiscovery.data_structure.table.analysis.DBScan.column_names
```

The documentation for this class was generated from the following file:

- data_structure/table/analysis/[dbscan.py](#)

6.12 skdiscovery.data_structure.framework.DiscoveryPipeline Class Reference

Pipeline for running the analysis.

Public Member Functions

- def [__init__](#) (self, [data_fetcher](#), list_StageContainers)
Initialize a new pipeline.
- def [run](#) (self, num_runs=1, perturb_data=False, num_cores=1, amazon=False, verbose=False)
Run the pipeline.
- def [perturb](#) (self)
Perturb the paramters in the stage containers.
- def [reset](#) (self)
Reset the stage containers to their default values and clear previous runs.
- def [getMetadata](#) (self)
Retrieve Metadata from stage containers.
- def [getMetadataHistory](#) (self)
Get the metadata for each run in the pipeline.
- def [perturbData](#) (self)

- Perturb the input data.*
 - def [getResults](#) (self, index=None)
Return results from previous runs.
 - def [resultIter](#) (self)
Retrieves and iterator to the results and history of the pipeline.
 - def [plotPipelineInstance](#) (self)
Plot current instance of pipeline stages with metadata.
 - def [plotPipelineStructure](#) (self)
Plot pipeline structure.
 - def [getMetadataNestedTypes](#) (self)
Get the Metadata Nested Types.
 - def [getMetadataNestedGraph](#) (self)
Retrieve the metadata nested graph.
 - def [__str__](#) (self)
String representation of the pipeline.

Public Attributes

- [stage_containers](#)
- [data_fetcher](#)
- [stageConfigurationHistory](#)
- [RA_results](#)

6.12.1 Detailed Description

Pipeline for running the analysis.

6.12.2 Constructor & Destructor Documentation

6.12.2.1 `__init__()`

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.__init__ (
    self,
    data_fetcher,
    list_StageContainers )
```

Initialize a new pipeline.

Parameters

<i>data_fetcher</i>	Data fetcher to use as a data source (from skdaccess)
<i>list_StageContainers</i>	List of stage containers

6.12.3 Member Function Documentation

6.12.3.1 __str__()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.__str__ (
    self )
```

String representation of the pipeline.

Returns

String of current metadata of pipeline containers.

6.12.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.getMetadata (
    self )
```

Retrieve Metadata from stage containers.

Returns

list of metadata for the current run

6.12.3.3 getMetadataHistory()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.getMetadataHistory (
    self )
```

Get the metadata for each run in the pipeline.

Returns

list of metadata configurations for all runs

6.12.3.4 `getMetadataNestedGraph()`

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.getMetadataNestedGraph (
    self )
```

Retrieve the metadata nested graph.

Returns

String: Metadata nested graph

6.12.3.5 `getMetadataNestedTypes()`

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.getMetadataNestedTypes (
    self )
```

Get the Metadata Nested Types.

Returns

String: Metadata Nested types

6.12.3.6 `getResults()`

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.getResults (
    self,
    index = None )
```

Return results from previous runs.

Parameters

<i>index</i>	Index of run. If None, return all previous results
--------------	--

Returns

results from a run at index. If index=None, returns list of all results

6.12.3.7 perturb()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.perturb (
    self )
```

Perturb the paramters in the stage containers.

6.12.3.8 perturbData()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.perturbData (
    self )
```

Perturb the input data.

6.12.3.9 plotPipelineInstance()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.plotPipelineInstance (
    self )
```

Plot current instance of pipeline stages with metadata.

Returns

iPython display object

6.12.3.10 plotPipelineStructure()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.plotPipelineStructure (
    self )
```

Plot pipeline structure.

Returns

iPython display object

6.12.3.11 reset()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.reset (
    self )
```

Reset the stage containers to their default values and clear previous runs.

6.12.3.12 resultIter()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.resultIter (
    self )
```

Retrieves and iterator to the results and history of the pipeline.

Returns

A 2 component iterator to the results and history of previous runs

6.12.3.13 run()

```
def skdiscovery.data_structure.framework.DiscoveryPipeline.run (
    self,
    num_runs = 1,
    perturb_data = False,
    num_cores = 1,
    amazon = False,
    verbose = False )
```

Run the pipeline.

Parameters

<i>num_runs</i>	Number of times to run the pipeline
<i>perturb_data</i>	Boolean flag. If running the pipeline multiple times then perturb the data instead of the pipeline
<i>num_cores</i>	Number of cores on the local machine to use. Defaults to 1 core. Use 0 to select the minimum between the number of runs and cpu cores.
<i>amazon</i>	Offload the pipeline on amazon
<i>verbose</i>	Display the pipeline for each run

6.12.4 Member Data Documentation

6.12.4.1 data_fetcher

`skdiscovery.data_structure.framework.DiscoveryPipeline.data_fetcher`

6.12.4.2 RA_results

`skdiscovery.data_structure.framework.DiscoveryPipeline.RA_results`

6.12.4.3 stage_containers

`skdiscovery.data_structure.framework.DiscoveryPipeline.stage_containers`

6.12.4.4 stageConfigurationHistory

`skdiscovery.data_structure.framework.DiscoveryPipeline.stageConfigurationHistory`


The documentation for this class was generated from the following file:

- `data_structure/framework/discoverypipeline.py`

6.13 skdiscovery.data_structure.series.analysis.General_Component_Analysis Class Reference

Performs either ICA or PCA analysis on series data.

Inheritance diagram for `skdiscovery.data_structure.series.analysis.gca.General_Component_Analysis`:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList)`
Initialize Analysis object.
- `def process (self, obj_data)`
Perform component analysis on data:

Public Attributes

- `str_description`
- `ap_paramList`
- `ap_paramNames`
- `results`

6.13.1 Detailed Description

Performs either ICA or PCA analysis on series data.

6.13.2 Constructor & Destructor Documentation

6.13.2.1 __init__()

```
def skdiscovery.data_structure.series.analysis.General_Component_Analysis.__init__ (
    self,
    str_description,
    ap_paramList )
```

Initialize Analysis object.

Parameters

<code>str_description</code>	String description of analysis
<code>ap_paramList[num_components]</code>	Number of components
<code>ap_paramList[component_type]</code>	Type of component analysis (CA); either PCA or ICA
<code>ap_paramList[start_time]</code>	Starting time for CA
<code>ap_paramList[end_time]</code>	ending time for CA
<code>ap_paramList[labels]</code>	Optional list of label names

6.13.3 Member Function Documentation

6.13.3.1 process()

```
def skdiscovery.data_structure.series.analysis.General_Component_Analysis.process (
    self,
    obj_data )
```

Perform component analysis on data:

Results are added to the data wrapper as a dictionary with results['CA'] = Eigenvenctors results['Projection'] = Projection on to the eigenvectors

Parameters

<i>obj_data</i>	Data wrapper containing the data
-----------------	----------------------------------

6.13.4 Member Data Documentation

6.13.4.1 ap_paramList

```
skdiscovery.data_structure.series.analysis.General_Component_Analysis.ap_paramList
```

6.13.4.2 ap_paramNames

```
skdiscovery.data_structure.series.analysis.General_Component_Analysis.ap_paramNames
```

6.13.4.3 results

```
skdiscovery.data_structure.series.analysis.General_Component_Analysis.results
```

6.13.4.4 `str_description`

`skdiscovery.data_structure.series.analysis.General_Component_Analysis.str_description`


The documentation for this class was generated from the following file:

- `data_structure/series/analysis/gca.py`

6.14 `skdiscovery.data_structure.table.analysis.General_Component_Analysis` Class Reference

Performs a general component analysis on table data.

Inheritance diagram for `skdiscovery.data_structure.table.analysis.General_Component_Analysis`:



Public Member Functions

- `def __init__(self, str_description, ap_paramList, n_components, column_names)`
Initialize Analysis object.
- `def process(self, obj_data)`
Perform component analysis on data.

Public Attributes

- `str_description`
- `ap_paramList`
- `ap_paramNames`
- `n_components`
- `column_names`
- `results`

6.14.1 Detailed Description

Performs a general component analysis on table data.

Currently, the two built-in types of analysis are either ICA or PCA.

6.14.2 Constructor & Destructor Documentation

6.14.2.1 `__init__()`

```
def skdiscovery.data_structure.table.analysis.General_Component_Analysis.__init__ (
    self,
    str_description,
    ap_paramList,
    n_components,
    column_names )
```

Initialize Analysis object.

Parameters

<i>str_description</i>	String description of analysis
<i>ap_paramList[component_type]</i>	Type of CA; either PCA or ICA
<i>ap_paramList[start_time]</i>	Starting time for CA
<i>ap_paramList[end_time]</i>	ending time for CA
<i>n_components</i>	Number of components to compute
<i>column_names</i>	Columns names to use

6.14.3 Member Function Documentation

6.14.3.1 `process()`

```
def skdiscovery.data_structure.table.analysis.General_Component_Analysis.process (
    self,
    obj_data )
```

Perform component analysis on data.

Results are added to the data wrapper as a dictionary with results['CA'] = Eigenvenctors results['Projection'] = Projection on to the eigenvectors

Parameters

<i>obj_data</i>	Data wrapper
-----------------	--------------

6.14.4 Member Data Documentation

6.14.4.1 `ap_paramList`

`skdiscovery.data_structure.table.analysis.General_Component_Analysis.ap_paramList`

6.14.4.2 `ap_paramNames`

`skdiscovery.data_structure.table.analysis.General_Component_Analysis.ap_paramNames`

6.14.4.3 `column_names`

`skdiscovery.data_structure.table.analysis.General_Component_Analysis.column_names`

6.14.4.4 `n_components`

`skdiscovery.data_structure.table.analysis.General_Component_Analysis.n_components`

6.14.4.5 `results`

`skdiscovery.data_structure.table.analysis.General_Component_Analysis.results`

6.14.4.6 `str_description`

`skdiscovery.data_structure.table.analysis.General_Component_Analysis.str_description`


The documentation for this class was generated from the following file:

- `data_structure/table/analysis/gca.py`

6.15 skdiscovery.data_structure.table.filters.GeoLocationFilter Class Reference

Removes objects not located in a specified region.

Inheritance diagram for skdiscovery.data_structure.table.filters.GeoLocationFilter:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList)`
Initialize GeolocationFilter.
- `def process (self, obj_data)`
Apply geolocation filter to data set.
- `def perturbParams (self)`
choose other random value for all parameters
- `def resetParams (self)`
set all parameters to initial value
- `def __str__ (self)`
String representation of object.
- `def getMetadata (self)`
Retrieve metadata about filter.

Public Attributes

- [str_description](#)
- [ap_paramList](#)
- [ap_paramNames](#)

6.15.1 Detailed Description

Removes objects not located in a specified region.

6.15.2 Constructor & Destructor Documentation

6.15.2.1 __init__()

```
def skdiscovery.data_structure.table.filters.GeoLocationFilter.__init__ (
    self,
    str_description,
    ap_paramList )
```

Initialize GeolocationFilter.

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[ap_lat]</i>	Latitude coordinate
<i>ap_paramList[ap_lon]</i>	Longitude coordinate
<i>ap_paramList[ap_radius]</i>	cut objects whose distance from lat/lon is greater than ap_radius

6.15.3 Member Function Documentation

6.15.3.1 __str__()

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String representation of object.

Returns

String listing all current parameters

6.15.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.15.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.15.3.4 process()

```
def skdiscovery.data_structure.table.filters.GeoLocationFilter.process (
    self,
    obj_data )
```

Apply geolocation filter to data set.

Parameters

<i>obj_data</i>	Table data wrapper
-----------------	--------------------

6.15.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.15.4 Member Data Documentation

6.15.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.15.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.15.4.3 str_description

```
skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/geolocation.py](#)

6.16 skdiscovery.data_structure.generic.accumulators.GPSHPlotter Class Reference

Plots results from General_Component_Analysis, for the GPS horizontal or vertical components.

Inheritance diagram for skdiscovery.data_structure.generic.accumulators.GPSHPlotter:



Public Member Functions

- `def __init__ (self, str_description, comp_name, mogi_name=None, pca_dir='H', pca_comp=0, scaleFactor=2.5, offset=.15, KF_tau=0, errorEllipses=False, map_resolution='i')`
Initialize GPHSHPlotter.
- `def process (self, obj_data)`
Plot the General Component Analysis results present stored in obj_

Public Attributes

- `dir_sign`
- `pca_dir`
- `pca_comp`
- `scaleFactor`
- `offset`
- `errorE`
- `KF_tau`
- `comp_name`
- `mogi_name`

6.16.1 Detailed Description

Plots results from General_Component_Analysis, for the GPS horizontal or vertical components.

6.16.2 Constructor & Destructor Documentation

6.16.2.1 `__init__()`

```
def skdiscovery.data_structure.generic.accumulators.GPSHPlotter.__init__ (
    self,
    str_description,
    comp_name,
    mogi_name = None,
    pca_dir = 'H',
    pca_comp = 0,
    scaleFactor = 2.5,
    offset = .15,
    KF_tau = 0,
    errorEllipses = False,
    map_resolution = 'i' )
```

Initialize GPSHPlotter.

Parameters

<i>str_description</i>	String describing accumulator
<i>comp_name</i>	Name of the GPCA results for accessing the GPCA output
<i>mogi_name</i>	Name of the Mogi results (optional)
<i>pca_dir</i>	PCA direction to plot, horizontal (H) or vertical (V)
<i>pca_comp</i>	The PCA component that will be plotted
<i>scaleFactor</i>	Scale factor for arrows
<i>offset</i>	Offset for plotting larger area on map
<i>KF_tau</i>	Tau used in kalman filter
<i>errorEllipses</i>	Boolean indicating whether or not to plot errorEllipses

6.16.3 Member Function Documentation

6.16.3.1 `process()`

```
def skdiscovery.data_structure.generic.accumulators.GPSHPlotter.process (
    self,
    obj_data )
```

Plot the General Component Analysis results present stored in `obj_`

Saves the basemap in `obj_data` results.

Parameters

<i>obj_data</i>	Data Wrapper that holds component analysis HPCA
-----------------	---

6.16.4 Member Data Documentation

6.16.4.1 comp_name

`skdiscovery.data_structure.generic.accumulators.GPSHPlotter.comp_name`

6.16.4.2 dir_sign

`skdiscovery.data_structure.generic.accumulators.GPSHPlotter.dir_sign`

6.16.4.3 errorE

`skdiscovery.data_structure.generic.accumulators.GPSHPlotter.errorE`

6.16.4.4 KF_tau

`skdiscovery.data_structure.generic.accumulators.GPSHPlotter.KF_tau`

6.16.4.5 mogi_name

`skdiscovery.data_structure.generic.accumulators.GPSHPlotter.mogi_name`

6.16.4.6 offset

`skdiscovery.data_structure.generic.accumulators.GPSHPlotter.offset`

6.16.4.7 `pca_comp`

```
skdiscovery.data_structure.generic.accumulators.GPSHPlotter.pca_comp
```

6.16.4.8 `pca_dir`

```
skdiscovery.data_structure.generic.accumulators.GPSHPlotter.pca_dir
```

6.16.4.9 `scaleFactor`

```
skdiscovery.data_structure.generic.accumulators.GPSHPlotter.scaleFactor
```


The documentation for this class was generated from the following file:

- [data_structure/generic/accumulators/gpsplotter.py](#)

6.17 `skdiscovery.data_structure.table.fusion.GraceFusion` Class Reference

Fuses GRACE equivalent water depth time series.

Inheritance diagram for `skdiscovery.data_structure.table.fusion.GraceFusion`:



Public Member Functions

- `def __init__ (self, str_description, metadata, column_data_name='Grace', column_error_name='Grace_←
Uncertainty', gldas="Off")`
Initialize Grace Fusion item.
- `def process (self, obj_data)`
Adds columns for GRACE data and uncertainties.
- `def perturbParams (self)`
choose other random value for all parameters
- `def resetParams (self)`
set all parameters to initial value
- `def __str__ (self)`
String representation of object.
- `def getMetadata (self)`
Retrieve metadata about filter.

Public Attributes

- [metadata](#)
- [column_data_name](#)
- [column_error_name](#)
- [gldas](#)
- [str_description](#)
- [ap_paramList](#)
- [ap_paramNames](#)

6.17.1 Detailed Description

Fuses GRACE equivalent water depth time series.

Works on table data (original data from <http://grace.jpl.nasa.gov/data/get-data/monthly-mass-grids-land/>)

6.17.2 Constructor & Destructor Documentation

6.17.2.1 __init__()

```
def skdiscovery.data_structure.table.fusion.GraceFusion.__init__ (
    self,
    str_description,
    metadata,
    column_data_name = 'Grace',
    column_error_name = 'Grace_Uncertainty',
    gldas = "Off" )
```

Initialize Grace Fusion item.

Parameters

<i>str_description</i>	String describing item
<i>metadata</i>	Metadata that contains lat,lon coordinates based on data labels
<i>column_data_name</i>	Name of column for GRACE data
<i>column_error_name</i>	Grace Uncertainty column name
<i>gldas</i>	Indicating use of the global land data assimilation water model

6.17.3 Member Function Documentation

6.17.3.1 __str__()

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String represntation of object.

Returns

String listing all current parameters

6.17.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.17.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.17.3.4 process()

```
def skdiscovery.data_structure.table.fusion.GraceFusion.process (
    self,
    obj_data )
```

Adds columns for GRACE data and uncertainties.

Parameters

<i>obj_data</i>	Input DataWrapper, will be modified in place
-----------------	--

6.17.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.17.4 Member Data Documentation

6.17.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.17.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.17.4.3 column_data_name

```
skdiscovery.data_structure.table.fusion.GraceFusion.column_data_name
```

6.17.4.4 column_error_name

```
skdiscovery.data_structure.table.fusion.GraceFusion.column_error_name
```

6.17.4.5 gldas

```
skdiscovery.data_structure.table.fusion.GraceFusion.gldas
```

6.17.4.6 metadata

```
skdiscovery.data_structure.table.fusion.GraceFusion.metadata
```

6.17.4.7 str_description

```
skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]
```


The documentation for this class was generated from the following file:

- [data_structure/table/fusion/grace.py](#)

6.18 skdiscovery.data_structure.generic.accumulators.HCluster Class Reference

Hierarchical Clustering function that produces a cluster map of the distance matrix.

Inheritance diagram for skdiscovery.data_structure.generic.accumulators.HCluster:



Public Member Functions

- def `__init__` (self, str_description, [obj_name](#))
Initialize [HCluster](#).
- def [process](#) (self, obj_data)
Produces a cluster map and stores the linkage results.

Public Attributes

- [obj_name](#)

6.18.1 Detailed Description

Hierarchical Clustering function that produces a cluster map of the distance matrix.

6.18.2 Constructor & Destructor Documentation

6.18.2.1 `__init__()`

```
def skdiscovery.data_structure.generic.accumulators.HCluster.__init__ (
    self,
    str_description,
    obj_name )
```

Initialize [HCluster](#).

Parameters

<i>str_description</i>	String describing accumulator
<i>obj_name</i>	Name of distance matrix parameter in the <code>obj_data</code> results

6.18.3 Member Function Documentation

6.18.3.1 `process()`

```
def skdiscovery.data_structure.generic.accumulators.HCluster.process (
    self,
    obj_data )
```

Produces a cluster map and stores the linkage results.

Parameters

<i>obj_data</i>	Data wrapper
-----------------	--------------

6.18.4 Member Data Documentation

6.18.4.1 `obj_name`

```
skdiscovery.data_structure.generic.accumulators.HCluster.obj_name
```


The documentation for this class was generated from the following file:

- [data_structure/generic/accumulators/hcluster.py](#)

6.19 skdiscovery.data_structure.table.filters.HTanFilter Class Reference

Filter to subtract an arctan fit from data.

Inheritance diagram for skdiscovery.data_structure.table.filters.HTanFilter:



Public Member Functions

- `def __init__(self, str_description, t0, amplitude=5, timescale=1., offset=0, slope=0, labels=None, column_names=None, start_time_limit=None, end_time_limit=None, start=None, end=None)`
Fit and remove hyperbolic tangent function from data.
- `def process(self, obj_data)`
Apply Arctangent filter to data param.

Public Attributes

- `a`
- `t0`
- `c`
- `slope`
- `offset`
- `labels`
- `column_names`
- `start_time_limit`
- `end_time_limit`
- `start`
- `end`

6.19.1 Detailed Description

Filter to subtract an arctan fit from data.

6.19.2 Constructor & Destructor Documentation

6.19.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.HTanFilter.__init__ (
    self,
    str_description,
    t0,
    amplitude = 5,
    timescale = 1.,
    offset = 0,
    slope = 0,
    labels = None,
    column_names = None,
    start_time_limit = None,
    end_time_limit = None,
    start = None,
    end = None )
```

Fit and remove hyperbolic tangent function from data.

Parameters

<i>str_description</i>	String description of data
<i>t0</i>	Initial time offset of arctangent
<i>amplitude</i>	initial amplitude of arctangent
<i>timescale</i>	Timescale of fit
<i>offset</i>	Initial Y offset of arctangent
<i>slope</i>	Slope of the data
<i>labels</i>	Labels to apply arctangent function to
<i>column_names</i>	Column names to apply arctangent function to
<i>start_time_limit</i>	Starting time bound for fit to arctan (default: no bound)
<i>end_time_limit</i>	Ending time bound for fit to arctan (default: no bound)
<i>start</i>	Index of the first data point to fit (default: index of first data point)
<i>end</i>	Index of the last data point to fit (default: index of last data point)

6.19.3 Member Function Documentation

6.19.3.1 `process()`

```
def skdiscovery.data_structure.table.filters.HTanFilter.process (
    self,
    obj_data )
```

Apply Arctangent filter to data param.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.19.4 Member Data Documentation

6.19.4.1 a

`skdiscovery.data_structure.table.filters.HTanFilter.a`

6.19.4.2 c

`skdiscovery.data_structure.table.filters.HTanFilter.c`

6.19.4.3 column_names

`skdiscovery.data_structure.table.filters.HTanFilter.column_names`

6.19.4.4 end

`skdiscovery.data_structure.table.filters.HTanFilter.end`

6.19.4.5 end_time_limit

`skdiscovery.data_structure.table.filters.HTanFilter.end_time_limit`

6.19.4.6 labels

`skdiscovery.data_structure.table.filters.HTanFilter.labels`

6.19.4.7 offset

`skdiscovery.data_structure.table.filters.HTanFilter.offset`

6.19.4.8 slope

`skdiscovery.data_structure.table.filters.HTanFilter.slope`

6.19.4.9 start

`skdiscovery.data_structure.table.filters.HTanFilter.start`

6.19.4.10 start_time_limit

`skdiscovery.data_structure.table.filters.HTanFilter.start_time_limit`

6.19.4.11 t0

`skdiscovery.data_structure.table.filters.HTanFilter.t0`


The documentation for this class was generated from the following file:

- [data_structure/table/filters/hyperbolictan.py](#)

6.20 skdiscovery.data_structure.series.filters.HTanFilter Class Reference

Filter to subtract arctan fit from data.

Inheritance diagram for skdiscovery.data_structure.series.filters.HTanFilter:



Public Member Functions

- `def __init__` (self, str_description, t0, amplitude=5, timescale=1., offset=0, slope=0, labels=None, column_names=None, start_time_limit=None, end_time_limit=None, start=None, end=None)
Fit and remove hyperbolic tangent function from data.
- `def process` (self, obj_data)
Apply Arctangent filter to data param.

Public Attributes

- a
- t0
- c
- slope
- offset
- labels
- column_names
- start_time_limit
- end_time_limit
- start
- end

6.20.1 Detailed Description

Filter to subtract arctan fit from data.

[DEPRECATED] [will be removed]

6.20.2 Constructor & Destructor Documentation

6.20.2.1 `__init__()`

```
def skdiscovery.data_structure.series.filters.HTanFilter.__init__ (
    self,
    str_description,
    t0,
    amplitude = 5,
    timescale = 1.,
    offset = 0,
    slope = 0,
    labels = None,
    column_names = None,
    start_time_limit = None,
    end_time_limit = None,
    start = None,
    end = None )
```

Fit and remove hyperbolic tangent function from data.

Parameters

<i>str_description</i>	String description of data
<i>t0</i>	Initial time offset of arctangent
<i>amplitude</i>	Initial amplitude of arctangent
<i>timescale</i>	Timescale of fit
<i>offset</i>	Initial Y offset of arctangent
<i>slope</i>	Slope of the data
<i>labels</i>	Labels to apply arctangent function to
<i>column_names</i>	Column names to apply arctangent function to
<i>start_time_limit</i>	Starting time bound for fit to arctan (default: no bound)
<i>end_time_limit</i>	Ending time bound for fit to arctan (default: no bound)
<i>start</i>	Index of the first data point to fit (default: index of first data point)
<i>end</i>	Index of the last data point to fit (default: index of last data point)

6.20.3 Member Function Documentation

6.20.3.1 `process()`

```
def skdiscovery.data_structure.series.filters.HTanFilter.process (
    self,
    obj_data )
```

Apply Arctangent filter to data param.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.20.4 Member Data Documentation

6.20.4.1 a

`skdiscovery.data_structure.series.filters.HTanFilter.a`

6.20.4.2 c

`skdiscovery.data_structure.series.filters.HTanFilter.c`

6.20.4.3 column_names

`skdiscovery.data_structure.series.filters.HTanFilter.column_names`

6.20.4.4 end

`skdiscovery.data_structure.series.filters.HTanFilter.end`

6.20.4.5 end_time_limit

`skdiscovery.data_structure.series.filters.HTanFilter.end_time_limit`

6.20.4.6 labels

`skdiscovery.data_structure.series.filters.HTanFilter.labels`

6.20.4.7 offset

`skdiscovery.data_structure.series.filters.HTanFilter.offset`

6.20.4.8 slope

`skdiscovery.data_structure.series.filters.HTanFilter.slope`

6.20.4.9 start

`skdiscovery.data_structure.series.filters.HTanFilter.start`

6.20.4.10 start_time_limit

`skdiscovery.data_structure.series.filters.HTanFilter.start_time_limit`

6.20.4.11 t0

`skdiscovery.data_structure.series.filters.HTanFilter.t0`


The documentation for this class was generated from the following file:

- [data_structure/series/filters/hyperbolic_tan.py](#)

6.21 skdiscovery.data_structure.table.filters.InterpolateFilter Class Reference

Interpolate missing values on table data.

Inheritance diagram for skdiscovery.data_structure.table.filters.InterpolateFilter:



Public Member Functions

- def [process](#) (self, obj_data)
Interpolate missing data in obj_data DataWrapper.

6.21.1 Detailed Description

Interpolate missing values on table data.

6.21.2 Member Function Documentation

6.21.2.1 process()

```
def skdiscovery.data_structure.table.filters.InterpolateFilter.process (
    self,
    obj_data )
```

Interpolate missing data in obj_data DataWrapper.

Parameters

<i>obj_data</i>	Input DataWrapper, will be modified in place
-----------------	--


The documentation for this class was generated from the following file:

- data_structure/table/filters/[interpolate.py](#)

6.22 skdiscovery.data_structure.series.filters.InterpolateFilter Class Reference

Interpolate missing values on series data.

Inheritance diagram for skdiscovery.data_structure.series.filters.InterpolateFilter:



Public Member Functions

- def [process](#) (self, obj_data)
Interpolate missing data in obj_data DataWrapper.

6.22.1 Detailed Description

Interpolate missing values on series data.

6.22.2 Member Function Documentation

6.22.2.1 process()

```
def skdiscovery.data_structure.series.filters.InterpolateFilter.process (
    self,
    obj_data )
```

Interpolate missing data in obj_data DataWrapper.

Parameters

<i>obj_data</i>	Input DataWrapper, will be modified in place
-----------------	--


The documentation for this class was generated from the following file:

- data_structure/series/filters/[interpolate.py](#)

6.23 skdiscovery.data_structure.series.filters.KalmanFilter Class Reference

Runs a Kalman Smoother on series data.

Inheritance diagram for skdiscovery.data_structure.series.filters.KalmanFilter:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList, uncertainty_clip=5)`
Initialize [KalmanFilter](#).
- `def process (self, obj_data)`
Apply kalman smoother to data set.

Public Attributes

- [uncertainty_clip](#)
- [ap_paramNames](#)

6.23.1 Detailed Description

Runs a Kalman Smoother on series data.

For more information see: Ji, K. H. 2011, PhD thesis, MIT.

6.23.2 Constructor & Destructor Documentation

6.23.2.1 __init__()

```
def skdiscovery.data_structure.series.filters.KalmanFilter.__init__ (  
    self,  
    str_description,  
    ap_paramList,  
    uncertainty_clip = 5 )
```

Initialize [KalmanFilter](#).

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[ap_tau]</i>	the correlation time
<i>ap_paramList[ap_sigmaSq]</i>	the data noise
<i>ap_paramList[ap_R]</i>	the process noise
<i>uncertainty_clip</i>	Clip data with uncertainties greater than <code>uncertainty_clip * median uncertainty</code>

6.23.3 Member Function Documentation

6.23.3.1 process()

```
def skdiscovery.data_structure.series.filters.KalmanFilter.process (
    self,
    obj_data )
```

Apply kalman smoother to data set.

Parameters

<i>obj_data</i>	Input DataWrapper. Changes are made in place.
-----------------	---

6.23.4 Member Data Documentation

6.23.4.1 ap_paramNames

```
skdiscovery.data_structure.series.filters.KalmanFilter.ap_paramNames
```

6.23.4.2 uncertainty_clip

```
skdiscovery.data_structure.series.filters.KalmanFilter.uncertainty_clip
```


The documentation for this class was generated from the following file:

- `data_structure/series/filters/kalman.py`

6.24 skdiscovery.data_structure.table.filters.KalmanFilter Class Reference

Runs a Kalman Smoother on table data.

Inheritance diagram for skdiscovery.data_structure.table.filters.KalmanFilter:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList, uncertainty_clip=5, column_names=None, error_column_names=None, fillna=True)`
Initialize [KalmanFilter](#).
- `def process (self, obj_data)`
Apply kalman smoother to data set.

Public Attributes

- [uncertainty_clip](#)
- [ap_paramNames](#)
- [column_names](#)
- [error_column_names](#)
- [fillna](#)

6.24.1 Detailed Description

Runs a Kalman Smoother on table data.

For more information see: Ji, K. H. 2011, PhD thesis, MIT.

6.24.2 Constructor & Destructor Documentation

6.24.2.1 __init__()

```

def skdiscovery.data_structure.table.filters.KalmanFilter.__init__ (
    self,
    str_description,
    ap_paramList,
    uncertainty_clip = 5,
    column_names = None,
    error_column_names = None,
    fillna = True )
  
```

Initialize [KalmanFilter](#).

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[ap_tau]</i>	the correlation time
<i>ap_paramList[ap_sigmaSq]</i>	the data noise
<i>ap_paramList[ap_R]</i>	the process noise
<i>uncertainty_clip</i>	Clip data with uncertainties greater than <code>uncertainty_clip * median uncertainty</code>
<i>column_names</i>	List of column names to smooth (using <code>None</code> will apply to all columns)
<i>error_column_names</i>	List of error column names to smooth (using <code>None</code> will use default error columns)
<i>fillna</i>	Fill in missing values

6.24.3 Member Function Documentation

6.24.3.1 process()

```
def skdiscovery.data_structure.table.filters.KalmanFilter.process (
    self,
    obj_data )
```

Apply kalman smoother to data set.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.24.4 Member Data Documentation

6.24.4.1 ap_paramNames

```
skdiscovery.data_structure.table.filters.KalmanFilter.ap_paramNames
```

6.24.4.2 column_names

```
skdiscovery.data_structure.table.filters.KalmanFilter.column_names
```

6.24.4.3 error_column_names

```
skdiscovery.data_structure.table.filters.KalmanFilter.error_column_names
```

6.24.4.4 fillna

```
skdiscovery.data_structure.table.filters.KalmanFilter.fillna
```

6.24.4.5 uncertainty_clip

```
skdiscovery.data_structure.table.filters.KalmanFilter.uncertainty_clip
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/kalman.py](#)

6.25 skdiscovery.data_structure.series.filters.LowPassFilter Class Reference

A FIR Remez (Parks-McLellan) designed low pass filter for series data.

Inheritance diagram for `skdiscovery.data_structure.series.filters.LowPassFilter`:



Public Member Functions

- `def __init__(self, str_description, ap_paramList)`
Initialize [LowPassFilter](#).
- `def process(self, obj_data)`
Apply lowpass filter to data set, with changes applied in place.

Public Attributes

- [ap_paramNames](#)

6.25.1 Detailed Description

A FIR Remez (Parks-McLellan) designed low pass filter for series data.

6.25.2 Constructor & Destructor Documentation

6.25.2.1 `__init__()`

```
def skdiscovery.data_structure.series.filters.LowPassFilter.__init__ (
    self,
    str_description,
    ap_paramList )
```

Initialize [LowPassFilter](#).

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[ntaps]</i>	Number of filter taps
<i>ap_paramList[fpassf_per]</i>	Frequency passband ratio/percentage
<i>ap_paramList[fstopf_per]</i>	Frequency stopband ratio/percentage
<i>ap_paramList[wghts]</i>	Band importance weights
<i>ap_paramList[miter]</i>	Maximum number of iterations for generating the filter

6.25.3 Member Function Documentation

6.25.3.1 `process()`

```
def skdiscovery.data_structure.series.filters.LowPassFilter.process (
    self,
    obj_data )
```

Apply lowpass filter to data set, with changes applied in place.

Parameters

<i>obj_data</i>	Input data with data
-----------------	----------------------

6.25.4 Member Data Documentation

6.25.4.1 ap_paramNames

`skdiscovery.data_structure.series.filters.LowPassFilter.ap_paramNames`


The documentation for this class was generated from the following file:

- `data_structure/series/filters/lowpass.py`

6.26 skdiscovery.data_structure.table.filters.LowPassFilter Class Reference

A remez low pass filter for table data.

Inheritance diagram for `skdiscovery.data_structure.table.filters.LowPassFilter`:



Public Member Functions

- `def __init__(self, str_description, ap_paramList)`
Initialize [LowPassFilter](#).
- `def process(self, obj_data)`
Apply lowpass filter to data set.

Public Attributes

- [ap_paramNames](#)

6.26.1 Detailed Description

A remez low pass filter for table data.

6.26.2 Constructor & Destructor Documentation

6.26.2.1 __init__()

```

def skdiscovery.data_structure.table.filters.LowPassFilter.__init__(
    self,
    str_description,
    ap_paramList )
  
```

Initialize [LowPassFilter](#).

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[ntaps]</i>	number of filter taps
<i>ap_paramList[fpassf_per]</i>	frequency passband ratio/percentage
<i>ap_paramList[fstopf_per]</i>	frequency stopband ratio/percentage
<i>ap_paramList[wgths]</i>	band importance weights
<i>ap_paramList[miter]</i>	maximum number of iterations for generating the filter

6.26.3 Member Function Documentation

6.26.3.1 process()

```
def skdiscovery.data_structure.table.filters.LowPassFilter.process (
    self,
    obj_data )
```

Apply lowpass filter to data set.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.26.4 Member Data Documentation

6.26.4.1 ap_paramNames

```
skdiscovery.data_structure.table.filters.LowPassFilter.ap_paramNames
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/lowpass.py](#)

6.27 skdiscovery.data_structure.series.filters.MedianFilter Class Reference

A Median filter for series data.

Inheritance diagram for skdiscovery.data_structure.series.filters.MedianFilter:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList, interpolate=True, subtract=False)`
Initialize `MedianFilter`.
- `def process (self, obj_data)`
Apply median filter to data set.

Public Attributes

- `interpolate`
- `subtract`
- `ap_paramNames`

6.27.1 Detailed Description

A Median filter for series data.

6.27.2 Constructor & Destructor Documentation

6.27.2.1 __init__()

```

def skdiscovery.data_structure.series.filters.MedianFilter.__init__ (
    self,
    str_description,
    ap_paramList,
    interpolate = True,
    subtract = False )
  
```

Initialize `MedianFilter`.

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[ap_window]</i>	median filter window width
<i>interpolate</i>	Flag to interpolate data points before filtering
<i>subtract</i>	Flag to subtract filtered result from original

6.27.3 Member Function Documentation

6.27.3.1 process()

```
def skdiscovery.data_structure.series.filters.MedianFilter.process (
    self,
    obj_data )
```

Apply median filter to data set.

Parameters

<i>obj_data</i>	Input DataWrapper. Changes are made in place.
-----------------	---

6.27.4 Member Data Documentation

6.27.4.1 ap_paramNames

```
skdiscovery.data_structure.series.filters.MedianFilter.ap_paramNames
```

6.27.4.2 interpolate

```
skdiscovery.data_structure.series.filters.MedianFilter.interpolate
```

6.27.4.3 subtract

```
skdiscovery.data_structure.series.filters.MedianFilter.subtract
```


The documentation for this class was generated from the following file:

- [data_structure/series/filters/median.py](#)

6.28 skdiscovery.data_structure.table.filters.MedianFilter Class Reference

A Median filter for table data.

Inheritance diagram for skdiscovery.data_structure.table.filters.MedianFilter:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList, interpolate=True, subtract=False, regular_period=True, min_periods=1)`
Initialize [MedianFilter](#).
- `def process (self, obj_data)`
Apply median filter to data set.

Public Attributes

- [interpolate](#)
- [subtract](#)
- [ap_paramNames](#)
- [regular_period](#)
- [min_periods](#)

6.28.1 Detailed Description

A Median filter for table data.

6.28.2 Constructor & Destructor Documentation

6.28.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.MedianFilter.__init__ (
    self,
    str_description,
    ap_paramList,
    interpolate = True,
    subtract = False,
    regular_period = True,
    min_periods = 1 )
```

Initialize [MedianFilter](#).

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[ap_window]</i>	median filter window width
<i>interpolate</i>	Interpolate data points before filtering
<i>subtract</i>	Subtract filtered result from original
<i>regular_period</i>	Assume the data is regularly sampled
<i>min_periods</i>	Minimum required number of data points in window

6.28.3 Member Function Documentation

6.28.3.1 `process()`

```
def skdiscovery.data_structure.table.filters.MedianFilter.process (
    self,
    obj_data )
```

Apply median filter to data set.

Parameters

<i>obj_data</i>	Input panda's data series. Changes are made in place.
-----------------	---

6.28.4 Member Data Documentation

6.28.4.1 ap_paramNames

`skdiscovery.data_structure.table.filters.MedianFilter.ap_paramNames`

6.28.4.2 interpolate

`skdiscovery.data_structure.table.filters.MedianFilter.interpolate`

6.28.4.3 min_periods

`skdiscovery.data_structure.table.filters.MedianFilter.min_periods`

6.28.4.4 regular_period

`skdiscovery.data_structure.table.filters.MedianFilter.regular_period`

6.28.4.5 subtract

`skdiscovery.data_structure.table.filters.MedianFilter.subtract`


The documentation for this class was generated from the following file:

- `data_structure/table/filters/median.py`

6.29 skdiscovery.data_structure.table.analysis.MIDAS Class Reference

In Development A basic [MIDAS](#) trend estimator

Inheritance diagram for `skdiscovery.data_structure.table.analysis.MIDAS`:



Public Member Functions

- `def __init__ (self, str_description, column_names=None)`
Initiatlize the MIDAS filtering item.
- `def process (self, obj_data)`
Apply the MIDAS estimator to generate velocity estimates.
- `def perturbParams (self)`
choose other random value for all parameters
- `def resetParams (self)`
set all parameters to initial value
- `def __str__ (self)`
String represntation of object.
- `def getMetadata (self)`
Retrieve metadata about filter.

Public Attributes

- `column_names`
- `str_description`
- `ap_paramList`
- `ap_paramNames`

6.29.1 Detailed Description

In Development A basic MIDAS trend estimator

See <http://onlinelibrary.wiley.com/doi/10.1002/2015JB012552/full>

6.29.2 Constructor & Destructor Documentation

6.29.2.1 __init__()

```
def skdiscovery.data_structure.table.analysis.MIDAS.__init__ (
    self,
    str_description,
    column_names = None )
```

Initiatlize the MIDAS filtering item.

Parameters

<code>str_description</code>	String description of filter
<code>column_names</code>	List of column names to analyze

6.29.3 Member Function Documentation

6.29.3.1 __str__()

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String represntation of object.

Returns

String listing all current parameters

6.29.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.29.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.29.3.4 process()

```
def skdiscovery.data_structure.table.analysis.MIDAS.process (
    self,
    obj_data )
```

Apply the [MIDAS](#) estimator to generate velocity estimates.

Adds the result to the data wrapper

Parameters

<i>obj_data</i>	Data wrapper
-----------------	--------------

6.29.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.29.4 Member Data Documentation

6.29.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.29.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.29.4.3 column_names

```
skdiscovery.data_structure.table.analysis.MIDAS.column_names
```

6.29.4.4 str_description

```
skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]
```


The documentation for this class was generated from the following file:

- [data_structure/table/analysis/midas.py](#)

6.30 skdiscovery.data_structure.series.analysis.Mogi_Inversion Class Reference

Perform a Mogi source inversion on a set of gps series data.

Inheritance diagram for skdiscovery.data_structure.series.analysis.Mogi_Inversion:



Public Member Functions

- def `__init__` (self, str_description, ap_paramList)
Initialize Mogi analysis item.
- def `FitPCA` (self, hPCA_Proj)
Determine the timing of the inflation event.
- def `FitTimeSeries` (self, pd_series, ct)
Fits the amplitude and offset of an inflation event given the time and length of the event.
- def `process` (self, obj_data)
Finds the magma source (default-mogi) from PBO GPS data.

Public Attributes

- `ap_paramNames`

6.30.1 Detailed Description

Perform a Mogi source inversion on a set of gps series data.

The source is assumed to be a Mogi source (point source), but other source models can be selected. Assumes directions are named ('dN', 'dE', 'dU').

6.30.2 Constructor & Destructor Documentation

6.30.2.1 `__init__`()

```
def skdiscovery.data_structure.series.analysis.Mogi_Inversion.__init__ (
    self,
    str_description,
    ap_paramList )
```

Initialize Mogi analysis item.

Parameters

<i>str_description</i>	Description of the item
<i>ap_paramList[h_pca_name]</i>	Name of the pca computed by General_Component_Analysis. Gets start and end date from the PCA fit.
<i>ap_paramList[source_type]</i>	Type of magma chamber source model to use (mogi [default],finite_sphere,closed_pipe,constant_open_pipe,rising_open_pipe,sill)

6.30.3 Member Function Documentation

6.30.3.1 FitPCA()

```
def skdiscovery.data_structure.series.analysis.Mogi_Inversion.FitPCA (
    self,
    hPCA_Proj )
```

Determine the timing of the inflation event.

Uses the first component of the pca projection and fits $A * \arctan((t - t_0) / c) + B$ to the first pca projection.

Parameters

<i>hPCA_Proj</i>	The sklearn PCA projection
------------------	----------------------------

Returns

[t0, c]

6.30.3.2 FitTimeSeries()

```
def skdiscovery.data_structure.series.analysis.Mogi_Inversion.FitTimeSeries (
    self,
    pd_series,
    ct )
```

Fits the amplitude and offset of an inflation event given the time and length of the event.

Fits A and B in $A * \arctan((t - t_0) / c) + B$

Parameters

<i>pd_series</i>	Time series to be fit
<i>ct</i>	[t0, c]

Returns

Amplitude of fit

6.30.3.3 process()

```
def skdiscovery.data_structure.series.analysis.Mogi_Inversion.process (
    self,
    obj_data )
```

Finds the magma source (default-mogi) from PBO GPS data.

Assumes time series columns are named ('dN', 'dE', 'dU'). Predicts location of the magma source using `scipy.optimize`.↔
curve_fit

The location of the magma source is stored in the data wrapper as a list `res[0]` = latitude `res[1]` = longitude `res[2]` = source depth (km) `res[3]` = volume change (meters³) `res[4]` = extra parameters (depends on mogi fit type)

Parameters

<i>obj_data</i>	Data object containing the results from the PCA stage
-----------------	---

6.30.4 Member Data Documentation

6.30.4.1 ap_paramNames

```
skdiscovery.data_structure.series.analysis.Mogi_Inversion.ap_paramNames
```


The documentation for this class was generated from the following file:

- data_structure/series/analysis/[mogi.py](#)

6.31 skdiscovery.data_structure.table.analysis.Mogi_Inversion Class Reference

Perform a mogi source inversion on a set of gps table data.

Inheritance diagram for skdiscovery.data_structure.table.analysis.Mogi_Inversion:



Public Member Functions

- def `__init__` (self, str_description, ap_paramList, [pca_name](#), [column_names](#)=['dN', dE, dU])
Initialize Mogi analysis item.
- def [FitPCA](#) (self, hPCA_Proj)
Determine the timing of the inflation event from the first component of the pca projection.
- def [FitTimeSeries](#) (self, pd_series, ct)
Fits the amplitude and offset of an inflation event given the time and length of the event.
- def [process](#) (self, obj_data)
Finds the magma source (default-mogi) from PBO GPS data.

Public Attributes

- [pca_name](#)
- [column_names](#)
- [ap_paramNames](#)

6.31.1 Detailed Description

Perform a mogi source inversion on a set of gps table data.

The source is assumed to be a mogi source (point source), but other source models can be selected. Assumes directions are named ('dN', 'dE', 'dU').

6.31.2 Constructor & Destructor Documentation

6.31.2.1 `__init__`()

```

def skdiscovery.data_structure.table.analysis.Mogi_Inversion.__init__ (
    self,
    str_description,
    ap_paramList,
    pca_name,
    column_names = ['dN',
    dE,
    dU ]

```

Initialize Mogi analysis item.

Parameters

<i>str_description</i>	Description of item
<i>ap_paramList[source_type]</i>	Type of magma chamber source model to use (default-mogi,finite_sphere,closed_pipe,constant_open_pipe,rising_open_pipe,sill)
<i>pca_name</i>	Name of pca result
<i>column_names</i>	The data direction column names

6.31.3 Member Function Documentation

6.31.3.1 FitPCA()

```
def skdiscovery.data_structure.table.analysis.Mogi_Inversion.FitPCA (
    self,
    hPCA_Proj )
```

Determine the timing of the inflation event from the first component of the pca projection.

fits $A * \arctan((t - t_0) / c) + B$ to the first pca projection, in order to estimate source amplitude parameters

Parameters

<i>hPCA_Proj</i>	The sklearn PCA
------------------	-----------------

Returns

ct: the t_0 , c , and B parameters from the fit
 pA[0]: the fitted amplitude parameter

6.31.3.2 FitTimeSeries()

```
def skdiscovery.data_structure.table.analysis.Mogi_Inversion.FitTimeSeries (
    self,
    pd_series,
    ct )
```

Fits the amplitude and offset of an inflation event given the time and length of the event.

Fits A and B in $A * \arctan((t - t_0) / c) + B$

Parameters

<i>pd_series</i>	Time series to be fit
<i>ct</i>	the time constants for the arctan

Returns

res: Amplitude of the fit
 perr_leastsq: Error of the fit

6.31.3.3 process()

```
def skdiscovery.data_structure.table.analysis.Mogi_Inversion.process (
    self,
    obj_data )
```

Finds the magma source (default-mogi) from PBO GPS data.

Assumes time series columns are named ('dN', 'dE', 'dU'). Predicts the location of the magma source using `scipy.optimize.curve_fit`.

The result is added to the data wrapper as a list, with the four elements describing the location of the magma source:
 res[0] = latitude res[1] = longitude res[2] = source depth (km) res[3] = volume change (meters³)

Parameters

<i>obj_data</i>	
-----------------	--

6.31.4 Member Data Documentation**6.31.4.1 ap_paramNames**

```
skdiscovery.data_structure.table.analysis.Mogi_Inversion.ap_paramNames
```

6.31.4.2 column_names

```
skdiscovery.data_structure.table.analysis.Mogi_Inversion.column_names
```

6.31.4.3 pca_name

skdiscovery.data_structure.table.analysis.Mogi_Inversion.pca_name


The documentation for this class was generated from the following file:

- data_structure/table/analysis/mogi.py

6.32 skdiscovery.data_structure.table.filters.NormalizeFilter Class Reference

Normalize data using median filter.

Inheritance diagram for skdiscovery.data_structure.table.filters.NormalizeFilter:



Public Member Functions

- def `__init__` (self, str_description, column='PDCSAP_FLUX', group_column='QUARTER')
Initilaize [NormalizeFilter](#).
- def `process` (self, obj_data)
Apply Normalization filter to data wrapper.

Public Attributes

- [column](#)
- [group_column](#)

6.32.1 Detailed Description

Normalize data using median filter.

6.32.2 Constructor & Destructor Documentation

6.32.2.1 `__init__`()

```

def skdiscovery.data_structure.table.filters.NormalizeFilter.__init__ (
    self,
    str_description,
    column = 'PDCSAP_FLUX',
    group_column = 'QUARTER' )
  
```

Initilaize [NormalizeFilter](#).

Parameters

<i>str_description</i>	String describing filter
<i>column</i>	Name of column to normalize
<i>group_column</i>	Column to use to group data

6.32.3 Member Function Documentation**6.32.3.1 process()**

```
def skdiscovery.data_structure.table.filters.NormalizeFilter.process (
    self,
    obj_data )
```

Apply Normalization filter to data wrapper.

Parameters

<i>obj_data</i>	Input table data wrapper
-----------------	--------------------------

6.32.4 Member Data Documentation**6.32.4.1 column**

```
skdiscovery.data_structure.table.filters.NormalizeFilter.column
```

6.32.4.2 group_column

```
skdiscovery.data_structure.table.filters.NormalizeFilter.group_column
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/normalize.py](#)

6.33 skdiscovery.data_structure.series.filters.OffsetDetrend Class Reference

Trend filter that fits a stepwise function to linearly detrended series data.

Inheritance diagram for skdiscovery.data_structure.series.filters.OffsetDetrend:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList=[], labels=None, column_names=None, time_point=None, time_interval=None)`
Initialize *OffsetDetrend* filter.
- `def process (self, obj_data)`
Apply offset estimation and detrending filter to data set.

Public Attributes

- `labels`
- `column_names`
- `time_point`
- `time_interval`
- `ap_paramNames`

6.33.1 Detailed Description

Trend filter that fits a stepwise function to linearly detrended series data.

On detrended data this filter fits a stepwise function (number of steps provided by the user) to correct the linear fit by accounting for discontinuous offsets, such as due to a change in the antenna or from an earthquake. The final linear fit handles each portion of the offset independently. If the number of discontinuities is not provided as an autoparam, the filter assumes a single discontinuity.

6.33.2 Constructor & Destructor Documentation

6.33.2.1 `__init__()`

```
def skdiscovery.data_structure.series.filters.OffsetDetrend.__init__ (
    self,
    str_description,
    ap_paramList = [],
    labels = None,
    column_names = None,
    time_point = None,
    time_interval = None )
```

Initialize [OffsetDetrend](#) filter.

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[step_count]</i>	Number of steps to remove from data (Default: 1)
<i>labels</i>	List of labels used to select data to be removed (using None will apply to all labels)
<i>column_names</i>	List of column names to select data to be removed (using None will apply to all columns)
<i>time_point</i>	Time of offset
<i>time_interval</i>	Interval within which the offset occurs

6.33.3 Member Function Documentation

6.33.3.1 process()

```
def skdiscovery.data_structure.series.filters.OffsetDetrend.process (
    self,
    obj_data )
```

Apply offset estimation and detrending filter to data set.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.33.4 Member Data Documentation

6.33.4.1 ap_paramNames

```
skdiscovery.data_structure.series.filters.OffsetDetrend.ap_paramNames
```

6.33.4.2 column_names

```
skdiscovery.data_structure.series.filters.OffsetDetrend.column_names
```

6.33.4.3 labels

```
skdiscovery.data_structure.series.filters.OffsetDetrend.labels
```

6.33.4.4 time_interval

```
skdiscovery.data_structure.series.filters.OffsetDetrend.time_interval
```

6.33.4.5 time_point

```
skdiscovery.data_structure.series.filters.OffsetDetrend.time_point
```


The documentation for this class was generated from the following file:

- [data_structure/series/filters/offset_detrend.py](#)

6.34 skdiscovery.data_structure.table.filters.OffsetDetrend Class Reference

Trend filter that fits a stepwise function to linearly detrended table data.

Inheritance diagram for `skdiscovery.data_structure.table.filters.OffsetDetrend`:



Public Member Functions

- `def __init__` (self, str_description, [column_names](#), ap_paramList=[], [labels](#)=None, [time_point](#)=None, [time_interval](#)=None)
Initialize [OffsetDetrend](#) filter for use on table data.
- `def process` (self, obj_data)
Apply offset estimation and detrending filter to data set.

Public Attributes

- [labels](#)
- [column_names](#)
- [time_point](#)
- [time_interval](#)
- [ap_paramNames](#)

6.34.1 Detailed Description

Trend filter that fits a stepwise function to linearly detrended table data.

On detrended data this filter fits a stepwise function (number of steps provided by the user) to correct the linear fit by accounting for discontinuous offsets, such as due to a change in the antenna or from an earthquake. The final linear fit handles each portion of the offset independently. If the number of discontinuities is not provided as an autoparam, the filter assumes a single discontinuity.

6.34.2 Constructor & Destructor Documentation

6.34.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.OffsetDetrend.__init__ (
    self,
    str_description,
    column_names,
    ap_paramList = [],
    labels = None,
    time_point = None,
    time_interval = None )
```

Initialize [OffsetDetrend](#) filter for use on table data.

Parameters

<i>str_description</i>	String describing filter
<i>column_names</i>	List of column names to select data to be removed (using None will apply to all columns)
<i>ap_paramList[step_count]</i>	Number of steps to remove from data (Default: 1)
<i>labels</i>	List of labels used to select data to be removed (using None will apply to all labels)
<i>time_point</i>	Time of offset
<i>time_interval</i>	Interval within which the offset occurs

6.34.3 Member Function Documentation

6.34.3.1 process()

```
def skdiscovery.data_structure.table.filters.OffsetDetrend.process (
    self,
    obj_data )
```

Apply offset estimation and detrending filter to data set.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.34.4 Member Data Documentation

6.34.4.1 ap_paramNames

```
skdiscovery.data_structure.table.filters.OffsetDetrend.ap_paramNames
```

6.34.4.2 column_names

```
skdiscovery.data_structure.table.filters.OffsetDetrend.column_names
```

6.34.4.3 labels

```
skdiscovery.data_structure.table.filters.OffsetDetrend.labels
```

6.34.4.4 time_interval

```
skdiscovery.data_structure.table.filters.OffsetDetrend.time_interval
```

6.34.4.5 time_point

skdiscovery.data_structure.table.filters.OffsetDetrend.time_point


The documentation for this class was generated from the following file:

- [data_structure/table/filters/offset_detrend.py](#)

6.35 skdiscovery.data_structure.table.analysis.Outlier Class Reference

Computes (data / mad(data)) for outlier detection.

Inheritance diagram for skdiscovery.data_structure.table.analysis.Outlier:



Public Member Functions

- `def __init__(self, str_description, columns=None, name_prefix='MAD_Scale_')`
Initialize [Outlier](#) Item.
- `def process(self, obj_data)`
Process the data object to add a column with the outlier scores.

Public Attributes

- [columns](#)
- [name_prefix](#)

6.35.1 Detailed Description

Computes (data / mad(data)) for outlier detection.

Creates a new column for the result

6.35.2 Constructor & Destructor Documentation

6.35.2.1 __init__()

```

def skdiscovery.data_structure.table.analysis.Outlier.__init__(
    self,
    str_description,
    columns = None,
    name_prefix = 'MAD_Scale_' )

```

Initialize [Outlier](#) Item.

Parameters

<i>str_description</i>	Name of Item
<i>columns</i>	List of of column names
<i>name_prefix</i>	Prefix of newly created column

6.35.3 Member Function Documentation**6.35.3.1 process()**

```
def skdiscovery.data_structure.table.analysis.Outlier.process (
    self,
    obj_data )
```

Process the data object to add a column with the outlier scores.

Parameters

<i>obj_data</i>	Input table data wrapper
-----------------	--------------------------

6.35.4 Member Data Documentation**6.35.4.1 columns**

```
skdiscovery.data_structure.table.analysis.Outlier.columns
```

6.35.4.2 name_prefix

```
skdiscovery.data_structure.table.analysis.Outlier.name_prefix
```


The documentation for this class was generated from the following file:

- data_structure/table/analysis/[outlier.py](#)

6.36 skdiscovery.data_structure.framework.PipelineItem Class Reference

The general class used to create pipeline items.

Inheritance diagram for skdiscovery.data_structure.framework.PipelineItem:

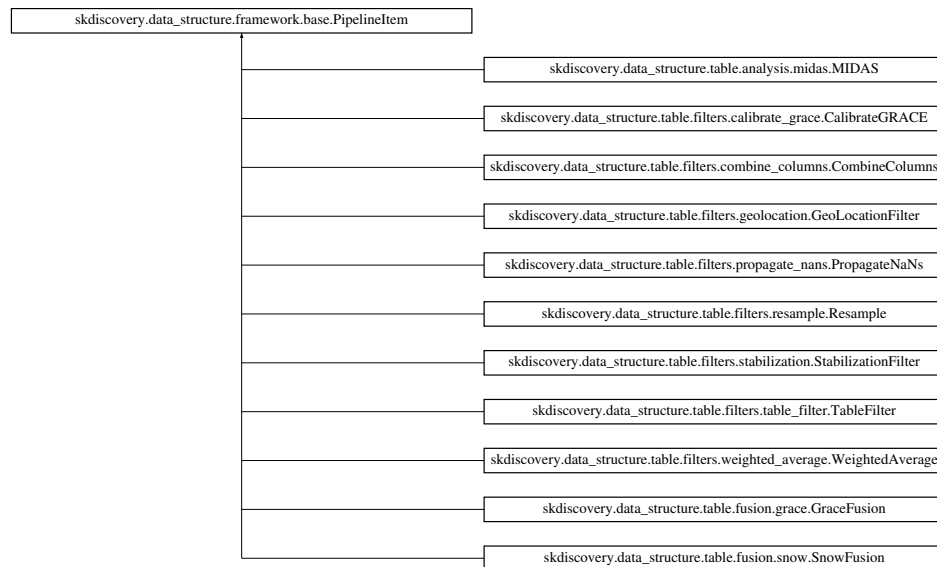

Public Member Functions

- `def __init__(self, str_description, ap_paramList=[])`
Initialize an object.
- `def perturbParams(self)`
choose other random value for all parameters
- `def resetParams(self)`
set all parameters to initial value
- `def process(self, obj_data)`
The actual filter processing.
- `def __str__(self)`
String representation of object.
- `def getMetadata(self)`
Retrieve metadata about filter.

Public Attributes

- `str_description`
- `ap_paramList`
- `ap_paramNames`

6.36.1 Detailed Description

The general class used to create pipeline items.

6.36.2 Constructor & Destructor Documentation

6.36.2.1 `__init__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__init__ (
    self,
    str_description,
    ap_paramList = [] )
```

Initialize an object.

Parameters

<i>str_description</i>	String description of filter
<i>ap_paramList</i>	List of AutoParam parameters.

6.36.3 Member Function Documentation

6.36.3.1 `__str__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self )
```

String represntation of object.

Returns

String listing all currenter parameters

6.36.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self )
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.36.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self )
```

choose other random value for all parameters

6.36.3.4 process()

```
def skdiscovery.data_structure.framework.PipelineItem.process (
    self,
    obj_data )
```

The actual filter processing.

Empty in this generic filter.

@param obj_data: Data wrapper that will be processed

6.36.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self )
```

set all parameters to initial value

6.36.4 Member Data Documentation

6.36.4.1 `ap_paramList`

`skdiscovery.data_structure.framework.PipelineItem.ap_paramList`

6.36.4.2 `ap_paramNames`

`skdiscovery.data_structure.framework.PipelineItem.ap_paramNames`

6.36.4.3 `str_description`

`skdiscovery.data_structure.framework.PipelineItem.str_description`

The documentation for this class was generated from the following file:

- `data_structure/framework/base.py`

6.37 `skdiscovery.utilities.planetary.map_util.Planet` Class Reference

A class for storing variables about a planetary body.

Public Member Functions

- `def __init__(self, name)`
Initialize `Planet` object.
- `def get_lateral_dist_array(self, ppd)`
Retrieve the lateral distance array.
- `def get_lateral_dist(self, lats, ppd)`
Get the lateral distance in meters for an input of lats.
- `def get_medial_dist(self, lats, ppd)`
Get the medial distance at specific latitudes.

Public Attributes

- `a`
- `b`
- `e_sq`
- `equator_1deg`
- `avg_radius`

6.37.1 Detailed Description

A class for storing variables about a planetary body.

6.37.2 Constructor & Destructor Documentation

6.37.2.1 `__init__()`

```
def skdiscovery.utilities.planetary.map_util.Planet.__init__ (
    self,
    name )
```

Initialize [Planet](#) object.

Parameters

<i>name</i>	The name of the planetary body choice of ('earth', 'wgs84', 'grs80', or 'moon'). 'wgs84' and 'earth' provide the same planet.
-------------	---

6.37.3 Member Function Documentation

6.37.3.1 `get_lateraldist()`

```
def skdiscovery.utilities.planetary.map_util.Planet.get_lateraldist (
    self,
    lats,
    ppd )
```

Get the lateral distance in meters for an input of lats.

Parameters

<i>lats</i>	Either a scalar or an array of latitudes
<i>ppd</i>	Pixels per degree of latitude

Returns

Lateral distance at each latitude in meters

6.37.3.2 `get_lateraldist_array()`

```
def skdiscovery.utilities.planetary.map_util.Planet.get_lateraldist_array (
    self,
    ppd )
```

Retrieve the lateral distance array.

Get an array of the lateral size of 1/ppd of a degree of longitude at every 1/ppd of a degree of latitude. Results given in meters.

Example input of ppd = 1 for the body "Earth" results in an array 180 cells long with `lateraldist_array[90] = 111 (m)`.

Parameters

<i>ppd</i>	the number of pixels-per-degree-of-latitude; the resulting array will therefore be (180*ppd) cells tall
------------	---

Returns

`lateraldist_array`: an array of the size (in meters) of 1 degree of longitude at each 1/ppd-th of a degree of latitude

6.37.3.3 `get_medialdist()`

```
def skdiscovery.utilities.planetary.map_util.Planet.get_medialdist (
    self,
    lats,
    ppd )
```

Get the medial distance at specific latitudes.

Parameters

<i>lats</i>	Either a scalar or an array of latitudes
<i>ppd</i>	Pixels per degree of latitude

Returns

Medial distance at each latitude in meters

6.37.4 Member Data Documentation

6.37.4.1 a

`skdiscovery.utilities.planetary.map_util.Planet.a`

6.37.4.2 avg_radius

`skdiscovery.utilities.planetary.map_util.Planet.avg_radius`

6.37.4.3 b

`skdiscovery.utilities.planetary.map_util.Planet.b`

6.37.4.4 e_sq

`skdiscovery.utilities.planetary.map_util.Planet.e_sq`

6.37.4.5 equator_1deg

`skdiscovery.utilities.planetary.map_util.Planet.equator_1deg`


The documentation for this class was generated from the following file:

- [utilities/planetary/map_util.py](#)

6.38 skdiscovery.data_structure.series.accumulators.Plotter Class Reference

Make a plot of series data.

Inheritance diagram for `skdiscovery.data_structure.series.accumulators.Plotter`:



Public Member Functions

- `def __init__ (self, str_description, num_columns=3, errorbars=False, width=13, height=4, kwargs)`
Initialize `Plotter`.
- `def process (self, obj_data)`
Plot each column in `obj_`

Public Attributes

- `kwargs`
- `num_columns`
- `errorbars`
- `height`
- `width`

6.38.1 Detailed Description

Make a plot of series data.

6.38.2 Constructor & Destructor Documentation

6.38.2.1 `__init__()`

```
def skdiscovery.data_structure.series.accumulators.Plotter.__init__ (
    self,
    str_description,
    num_columns = 3,
    errorbars = False,
    width = 13,
    height = 4,
    kwargs )
```

Initialize `Plotter`.

Parameters

<code>str_description</code>	String describing accumulator
<code>num_columns</code>	Number of columns to use when plotting data
<code>errorbars</code>	Flag indicating if errorbars should be used
<code>width</code>	Total width of all columns combined
<code>height</code>	Height of single row of plots
<code>**kwargs</code>	Any additional keyword arguments are passed on to matplotlib

6.38.3 Member Function Documentation

6.38.3.1 process()

```
def skdiscovery.data_structure.series.accumulators.Plotter.process (
    self,
    obj_data )
```

Plot each column in obj_

Parameters

<i>obj_data</i>	Data Wrapper
-----------------	--------------

6.38.4 Member Data Documentation

6.38.4.1 errorbars

```
skdiscovery.data_structure.series.accumulators.Plotter.errorbars
```

6.38.4.2 height

```
skdiscovery.data_structure.series.accumulators.Plotter.height
```

6.38.4.3 kwargs

```
skdiscovery.data_structure.series.accumulators.Plotter.kwargs
```

6.38.4.4 num_columns

```
skdiscovery.data_structure.series.accumulators.Plotter.num_columns
```

6.38.4.5 width

```
skdiscovery.data_structure.series.accumulators.Plotter.width
```


The documentation for this class was generated from the following file:

- [data_structure/series/accumulators/plotter.py](#)

6.39 skdiscovery.data_structure.table.accumulators.Plotter Class Reference

Make a plot of table data.

Inheritance diagram for `skdiscovery.data_structure.table.accumulators.Plotter`:



Public Member Functions

- `def __init__ (self, str_description, column_names=None, error_column_names=None, num_columns=3, width=13, height=4, columns_together=False, annotate_column=None, annotate_data=None, xlim=None, ylim=None, kwargs)`
Initialize `Plotter`.
- `def process (self, obj_data)`
Plot each column in `obj_data`

Public Attributes

- `xlim`
- `ylim`
- `kwargs`
- `num_columns`
- `height`
- `width`
- `column_names`
- `annotate_column`
- `annotate_data`
- `error_column_names`
- `columns_together`

6.39.1 Detailed Description

Make a plot of table data.

6.39.2 Constructor & Destructor Documentation

6.39.2.1 __init__()

```
def skdiscovery.data_structure.table.accumulators.Plotter.__init__ (
    self,
    str_description,
    column_names = None,
    error_column_names = None,
    num_columns = 3,
    width = 13,
    height = 4,
    columns_together = False,
    annotate_column = None,
    annotate_data = None,
    xlim = None,
    ylim = None,
    kwargs )
```

Initialize [Plotter](#).

Parameters

<i>str_description</i>	String describing accumulator
<i>column_names</i>	Columns to be plot
<i>error_column_names</i>	Columns containing uncertainties to be plot, no errorbars if None
<i>num_columns</i>	Number of columns to use when plotting data
<i>width</i>	Total width of all columns combined
<i>height</i>	Height of single row of plots
<i>columns_together</i>	If true, plot the columns on the same graph
<i>annotate_column</i>	Column of annotation data to use for annotation
<i>annotate_data</i>	Annotation data
<i>xlim</i>	The x limit
<i>ylim</i>	The y limit
<i>**kwargs</i>	Any additional keyword arguments are passed on to matplotlib

6.39.3 Member Function Documentation

6.39.3.1 process()

```
def skdiscovery.data_structure.table.accumulators.Plotter.process (
    self,
    obj_data )
```

Plot each column in obj_

Parameters

<i>obj_data</i>	Data Wrapper
-----------------	--------------

6.39.4 Member Data Documentation

6.39.4.1 annotate_column

```
skdiscovery.data_structure.table.accumulators.Plotter.annotate_column
```

6.39.4.2 annotate_data

```
skdiscovery.data_structure.table.accumulators.Plotter.annotate_data
```

6.39.4.3 column_names

```
skdiscovery.data_structure.table.accumulators.Plotter.column_names
```

6.39.4.4 columns_together

```
skdiscovery.data_structure.table.accumulators.Plotter.columns_together
```

6.39.4.5 error_column_names

`skdiscovery.data_structure.table.accumulators.Plotter.error_column_names`

6.39.4.6 height

`skdiscovery.data_structure.table.accumulators.Plotter.height`

6.39.4.7 kwargs

`skdiscovery.data_structure.table.accumulators.Plotter.kwargs`

6.39.4.8 num_columns

`skdiscovery.data_structure.table.accumulators.Plotter.num_columns`

6.39.4.9 width

`skdiscovery.data_structure.table.accumulators.Plotter.width`

6.39.4.10 xlim

`skdiscovery.data_structure.table.accumulators.Plotter.xlim`

6.39.4.11 ylim

`skdiscovery.data_structure.table.accumulators.Plotter.ylim`


The documentation for this class was generated from the following file:

- [data_structure/table/accumulators/plotter.py](#)

6.40 skdiscovery.data_structure.table.filters.PropagateNaNs Class Reference

Propagates NaN's from one column to other columns.

Inheritance diagram for skdiscovery.data_structure.table.filters.PropagateNaNs:



Public Member Functions

- `def __init__ (self, str_description, nan_column, target_columns)`
Initialize *PropagateNaNs* Filter.
- `def process (self, obj_data)`
PropagateNaNs on table data wrapper.
- `def perturbParams (self)`
choose other random value for all parameters
- `def resetParams (self)`
set all parameters to initial value
- `def __str__ (self)`
String representation of object.
- `def getMetadata (self)`
Retrieve metadata about filter.

Public Attributes

- `nan_column`
- `target_columns`
- `str_description`
- `ap_paramList`
- `ap_paramNames`

6.40.1 Detailed Description

Propagates NaN's from one column to other columns.

6.40.2 Constructor & Destructor Documentation

6.40.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.PropagateNaNs.__init__ (
    self,
    str_description,
    nan_column,
    target_columns )
```

Initialize [PropagateNaNs](#) Filter.

Parameters

<i>str_description</i>	String describing filter
<i>nan_column</i>	Column used to select which rows should be NaN's
<i>target_columns</i>	Rows in these column will be set to NaN's based on nan_column

6.40.3 Member Function Documentation

6.40.3.1 `__str__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String representation of object.

Returns

String listing all current parameters

6.40.3.2 `getMetadata()`

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.40.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.40.3.4 process()

```
def skdiscovery.data_structure.table.filters.PropagateNaNs.process (
    self,
    obj_data )
```

[PropagateNaNs](#) on table data wrapper.

Parameters

<i>obj_data</i>	Input table data wrapper
-----------------	--------------------------

6.40.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.40.4 Member Data Documentation

6.40.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.40.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```


6.40.4.3 nan_column

```
skdiscovery.data_structure.table.filters.PropagateNaNs.nan_column
```

6.40.4.4 str_description

```
skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]
```

6.40.4.5 target_columns

```
skdiscovery.data_structure.table.filters.PropagateNaNs.target_columns
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/propagate_nans.py](#)

6.41 skdiscovery.data_structure.table.filters.Resample Class Reference

[Resample](#) data.

Inheritance diagram for skdiscovery.data_structure.table.filters.Resample:



Public Member Functions

- def `__init__` (self, [str_description](#), [start_date](#)=None, [end_date](#)=None, [frequency](#)='D')
Initialize [Resample](#) filter.
- def [process](#) (self, obj_data)
Calibrates GRACE, updating in place.
- def [perturbParams](#) (self)
choose other random value for all parameters
- def [resetParams](#) (self)
set all parameters to initial value
- def `__str__` (self)
String representation of object.
- def [getMetadata](#) (self)
Retrieve metadata about filter.

Public Attributes

- [start_date](#)
- [end_date](#)
- [frequency](#)
- [str_description](#)
- [ap_paramList](#)
- [ap_paramNames](#)

6.41.1 Detailed Description

[Resample](#) data.

6.41.2 Constructor & Destructor Documentation

6.41.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.Resample.__init__ (
    self,
    str_description,
    start_date = None,
    end_date = None,
    frequency = 'D' )
```

Initialize [Resample](#) filter.

Parameters

<i>str_description</i>	String describing filter
<i>start_date</i>	Starting date
<i>end_date</i>	Ending date
<i>period</i>	New sampling rate

6.41.3 Member Function Documentation

6.41.3.1 `__str__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String representation of object.

Returns

String listing all current parameters

6.41.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.41.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.41.3.4 process()

```
def skdiscovery.data_structure.table.filters.Resample.process (
    self,
    obj_data )
```

Calibrates GRACE, updating in place.

Parameters

<i>obj_data</i>	Table data wrapper
-----------------	--------------------

6.41.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.41.4 Member Data Documentation

6.41.4.1 `ap_paramList`

`skdiscovery.data_structure.framework.PipelineItem.ap_paramList` [inherited]

6.41.4.2 `ap_paramNames`

`skdiscovery.data_structure.framework.PipelineItem.ap_paramNames` [inherited]

6.41.4.3 `end_date`

`skdiscovery.data_structure.table.filters.Resample.end_date`

6.41.4.4 `frequency`

`skdiscovery.data_structure.table.filters.Resample.frequency`

6.41.4.5 `start_date`

`skdiscovery.data_structure.table.filters.Resample.start_date`

6.41.4.6 `str_description`

`skdiscovery.data_structure.framework.PipelineItem.str_description` [inherited]


The documentation for this class was generated from the following file:

- `data_structure/table/filters/resample.py`

6.42 skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel Class Reference

Create a reverse ssh tunnel.

Inheritance diagram for skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel:



Public Member Functions

- `def __init__(self, server_address, username, key_filename, server_port, remote_host, remote_port, check=30, verbose=False)`
Initialize `ReverseTunnel` object.
- `def create_reverse_tunnel(self)`
Create the reverse tunnel.
- `def __del__(self)`
Destructor.

Public Attributes

- `server_address`
- `username`
- `key_filename`
- `server_port`
- `remote_host`
- `remote_port`
- `check`
- `verbose`
- `ssh`
- `event`
- `child_threads`

6.42.1 Detailed Description

Create a reverse ssh tunnel.

6.42.2 Constructor & Destructor Documentation

6.42.2.1 `__init__()`

```
def skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.__init__ (
    self,
    server_address,
    username,
    key_filename,
    server_port,
    remote_host,
    remote_port,
    check = 30,
    verbose = False )
```

Initialize [ReverseTunnel](#) object.

Parameters

<i>server_address</i>	Local server address
<i>username</i>	Valid username on remote host
<i>key_filename</i>	Filename of ssh key associated with remote host
<i>server_port</i>	Local port
<i>remote_host</i>	Address of remote host
<i>remote_port</i>	Remote port
<i>check</i>	Amount of time to wait in seconds when opening up a channel
<i>verbose</i>	Print status information

6.42.2.2 `__del__()`

```
def skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.__del__ (
    self )
```

Deconstructor.

6.42.3 Member Function Documentation

6.42.3.1 `create_reverse_tunnel()`

```
def skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.create_reverse_tunnel (
    self )
```

Create the reverse tunnel.

6.42.4 Member Data Documentation

6.42.4.1 check

`skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.check`

6.42.4.2 child_threads

`skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.child_threads`

6.42.4.3 event

`skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.event`

6.42.4.4 key_filename

`skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.key_filename`

6.42.4.5 remote_host

`skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.remote_host`

6.42.4.6 remote_port

`skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.remote_port`

6.42.4.7 server_address

```
skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.server_address
```

6.42.4.8 server_port

```
skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.server_port
```

6.42.4.9 ssh

```
skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.ssh
```

6.42.4.10 username

```
skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.username
```

6.42.4.11 verbose

```
skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel.verbose
```


The documentation for this class was generated from the following file:

- [utilities/cloud/ssh_reverse.py](#)

6.43 skdiscovery.data_structure.table.analysis.Skew Class Reference

Calculates the skew of table data.

Inheritance diagram for skdiscovery.data_structure.table.analysis.Skew:



Public Member Functions

- def [process](#) (self, obj_data)
Apply [Skew](#) analysis with results added to the data wrapper.

6.43.1 Detailed Description

Calculates the skew of table data.

6.43.2 Member Function Documentation

6.43.2.1 process()

```
def skdiscovery.data_structure.table.analysis.Skew.process (  
    self,  
    obj_data )
```

Apply [Skew](#) analysis with results added to the data wrapper.

Parameters

<i>obj_data</i>	Data wrapper
-----------------	--------------


The documentation for this class was generated from the following file:

- data_structure/table/analysis/[skew.py](#)

6.44 skdiscovery.data_structure.table.fusion.SnowFusion Class Reference

Adds snow time series data to table based on geographic coordinates.

Inheritance diagram for skdiscovery.data_structure.table.fusion.SnowFusion:



Public Member Functions

- `def __init__ (self, str_description, metadata, column_data_name='Snow')`
Initialize Snow Fusion item.
- `def process (self, obj_data)`
Adds column for snow (g02156) data.
- `def perturbParams (self)`
choose other random value for all parameters
- `def resetParams (self)`
set all parameters to initial value
- `def __str__ (self)`
String representation of object.
- `def getMetadata (self)`
Retrieve metadata about filter.

Public Attributes

- `metadata`
- `column_data_name`
- `str_description`
- `ap_paramList`
- `ap_paramNames`

6.44.1 Detailed Description

Adds snow time series data to table based on geographic coordinates.

Works on table data (original data from <http://nsidc.org/data/g02156>)

6.44.2 Constructor & Destructor Documentation

6.44.2.1 __init__()

```
def skdiscovery.data_structure.table.fusion.SnowFusion.__init__ (
    self,
    str_description,
    metadata,
    column_data_name = 'Snow' )
```

Initialize Snow Fusion item.

Parameters

<i>str_description</i>	String describing item
<i>metadata</i>	Metadata that contains lat,lon coordinates based on data labels
<i>column_data_name</i>	Name of column for Snow data

6.44.3 Member Function Documentation

6.44.3.1 __str__()

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String represntation of object.

Returns

String listing all currenter parameters

6.44.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.44.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.44.3.4 process()

```
def skdiscovery.data_structure.table.fusion.SnowFusion.process (
    self,
    obj_data )
```

Adds column for snow (g02156) data.

Parameters

<i>obj_data</i>	Input DataWrapper, will be modified in place
-----------------	--

6.44.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.44.4 Member Data Documentation

6.44.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.44.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.44.4.3 column_data_name

```
skdiscovery.data_structure.table.fusion.SnowFusion.column_data_name
```

6.44.4.4 metadata

```
skdiscovery.data_structure.table.fusion.SnowFusion.metadata
```

6.44.4.5 str_description

skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]


The documentation for this class was generated from the following file:

- data_structure/table/fusion/snow.py

6.45 skdiscovery.data_structure.table.filters.SnowRemover Class Reference

Removes data with snow errors.

Inheritance diagram for skdiscovery.data_structure.table.filters.SnowRemover:



Public Member Functions

- def `__init__` (self, str_description, ap_paramList=[AutoParam(1.5)], column_name='dN', snow_column='Snow')
Initialize snow remover for use on table data.
- def `process` (self, obj_data)
Removes table data with large snow errors.

Public Attributes

- column_name
- snow_column

6.45.1 Detailed Description

Removes data with snow errors.

6.45.2 Constructor & Destructor Documentation

6.45.2.1 __init__()

```

def skdiscovery.data_structure.table.filters.SnowRemover.__init__ (
    self,
    str_description,
    ap_paramList = [AutoParam(1.5)],
    column_name = 'dN',
    snow_column = 'Snow' )
  
```

Initialize snow remover for use on table data.

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[sigma_clip]</i>	remove station if the stddev of snowdays is sigma_clip times greater than non-snow days, default 1.5
<i>column_name</i>	Name of column to check
<i>snow_column</i>	Name of snow column to determine snowdays/non snow days

6.45.3 Member Function Documentation

6.45.3.1 process()

```
def skdiscovery.data_structure.table.filters.SnowRemover.process (
    self,
    obj_data )
```

Removes table data with large snow errors.

Parameters

<i>obj_data</i>	Input DataWrapper, will be modified in place
-----------------	--

6.45.4 Member Data Documentation

6.45.4.1 column_name

```
skdiscovery.data_structure.table.filters.SnowRemover.column_name
```

6.45.4.2 snow_column

```
skdiscovery.data_structure.table.filters.SnowRemover.snow_column
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/snow_remover.py](#)

6.46 skdiscovery.data_structure.table.filters.StabilizationFilter Class Reference

This filter transforms GPS stations in a region to a local reference frame.

Inheritance diagram for skdiscovery.data_structure.table.filters.StabilizationFilter:



Public Member Functions

- def [process](#) (self, obj_data)
Apply stabilization filter to data set.
- def [perturbParams](#) (self)
choose other random value for all parameters
- def [resetParams](#) (self)
set all parameters to initial value
- def [__str__](#) (self)
String represntation of object.
- def [getMetadata](#) (self)
Retrieve metadata about filter.

Public Attributes

- [str_description](#)
- [ap_paramList](#)
- [ap_paramNames](#)

6.46.1 Detailed Description

This filter transforms GPS stations in a region to a local reference frame.

6.46.2 Member Function Documentation

6.46.2.1 `__str__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String representation of object.

Returns

String listing all current parameters

6.46.2.2 `getMetadata()`

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.46.2.3 `perturbParams()`

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.46.2.4 `process()`

```
def skdiscovery.data_structure.table.filters.StabilizationFilter.process (
    self,
    obj_data )
```

Apply stabilization filter to data set.

Parameters

<i>obj_data</i>	Table data wrapper.
-----------------	---------------------

6.46.2.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.46.3 Member Data Documentation

6.46.3.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.46.3.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.46.3.3 str_description

```
skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]
```

The documentation for this class was generated from the following file:

- data_structure/table/filters/[stabilization.py](#)

6.47 skdiscovery.data_structure.framework.StageContainer Class Reference

Container to hold a stage for the DiscoveryPipeline.

Public Member Functions

- def `__init__` (self, `obj_content`, `obj_runmethod`=None, `obj_perturbmethod`=None, `obj_reset`=None)
Get the object and its run method into this conainer.
- def `run` (self, `obj_data_container`)
Execute the `obj_content` run method.
- def `perturb` (self)
Execute the `obj_content` peturb method.
- def `reset` (self)
Execute the `obj_content` reset method.
- def `getMetadata` (self)
Retrieves the `obj_content` metadata.
- def `getObjects` (self)
Return the `obj_content` in a list.
- def `getMetadataType` (self)
Get metadata type.
- def `getMetadataNestedTypes` (self)
Get the metadata along with container type.
- def `getMetadataNestedGraph` (self)
Get the nested graph for the container.

Public Attributes

- `obj_content`
- `runmethod`
- `perturbmethod`
- `resetmethod`

6.47.1 Detailed Description

Container to hold a stage for the DiscoveryPipeline.

6.47.2 Constructor & Destructor Documentation

6.47.2.1 `__init__()`

```
def skdiscovery.data_structure.framework.StageContainer.__init__ (
    self,
    obj_content,
    obj_runmethod = None,
    obj_perturbmethod = None,
    obj_reset = None )
```

Get the object and its run method into this conainer.

Parameters

<i>obj_content</i>	filter, analysis, or accumulator
<i>obj_runmethod</i>	Run method of the obj_content (default process)
<i>obj_perturbmethod</i>	Perturb method of the obj_content (default peturbParams)
<i>obj_reset</i>	Reset method of the obj_content (default resetParams)

6.47.3 Member Function Documentation

6.47.3.1 getMetadata()

```
def skdiscovery.data_structure.framework.StageContainer.getMetadata (
    self )
```

Retrieves the obj_content metadata.

Returns

obj_content metadata

6.47.3.2 getMetadataNestedGraph()

```
def skdiscovery.data_structure.framework.StageContainer.getMetadataNestedGraph (
    self )
```

Get the nested graph for the container.

Returns

String: Stage container subgraph

6.47.3.3 getMetadataNestedTypes()

```
def skdiscovery.data_structure.framework.StageContainer.getMetadataNestedTypes (
    self )
```

Get the metadata along with container type.

Returns

string of container and metadata

6.47.3.4 getMetadataType()

```
def skdiscovery.data_structure.framework.StageContainer.getMetadataType (
    self )
```

Get metadata type.

Returns

String: container type

6.47.3.5 getObjects()

```
def skdiscovery.data_structure.framework.StageContainer.getObjects (
    self )
```

Return the obj_content in a list.

Returns

Contained object in a list

6.47.3.6 perturb()

```
def skdiscovery.data_structure.framework.StageContainer.perturb (
    self )
```

Execute the obj_content perturb method.

6.47.3.7 reset()

```
def skdiscovery.data_structure.framework.StageContainer.reset (
    self )
```

Execute the obj_content reset method.

6.47.3.8 run()

```
def skdiscovery.data_structure.framework.StageContainer.run (
    self,
    obj_data_container )
```

Execute the obj_content run method.

Parameters

<i>obj_data_container</i>	Data container to be passed to the held obj_content's run method
---------------------------	--

6.47.4 Member Data Documentation

6.47.4.1 obj_content

`skdiscovery.data_structure.framework.StageContainer.obj_content`

6.47.4.2 perturbmethod

`skdiscovery.data_structure.framework.StageContainer.perturbmethod`

6.47.4.3 resetmethod

`skdiscovery.data_structure.framework.StageContainer.resetmethod`

6.47.4.4 runmethod

`skdiscovery.data_structure.framework.StageContainer.runmethod`

The documentation for this class was generated from the following file:

- `data_structure/framework/stagecontainers.py`

6.48 skdiscovery.data_structure.framework.StageContainerAlternative Class Reference

Stage Container that holds a list of stage containers and randomly chooses one to use.

Public Member Functions

- def `__init__` (self, `list_stagecontainers`)
Initialize the [StageContainerAlternative](#).
- def `run` (self, `obj_data_container`)
Run the currently selected stage container.
- def `perturb` (self)
choose one of the containers as an alternative and perturb its parameters
- def `getMetadata` (self)
Return metadata from the current container.
- def `getObjects` (self)
retrieve the current container as a list
- def `reset` (self)
Reset the current chosen [StageContainer](#).
- def `getMetadataType` (self)
Get metadata type.
- def `getMetadataNestedTypes` (self)
Get the metadata along with container type.
- def `getMetadataNestedGraph` (self)
Get the nested graph for the container.

Public Attributes

- `list_stagecontainers`
- `currentContainer`

Static Public Attributes

- list `currentContainer` = []

6.48.1 Detailed Description

Stage Container that holds a list of stage containers and randomly chooses one to use.

6.48.2 Constructor & Destructor Documentation

6.48.2.1 `__init__`()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.__init__ (
    self,
    list_stagecontainers )
```

Initialize the [StageContainerAlternative](#).

Parameters

<i>list_stagecontainers</i>	List of stage containers
-----------------------------	--------------------------

6.48.3 Member Function Documentation**6.48.3.1 getMetadata()**

```
def skdiscovery.data_structure.framework.StageContainerAlternative.getMetadata (
    self )
```

Return metadata from the current container.

Returns

metadata from the currently selected container

6.48.3.2 getMetadataNestedGraph()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.getMetadataNestedGraph (
    self )
```

Get the nested graph for the container.

Returns

String: Container subgraph

6.48.3.3 getMetadataNestedTypes()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.getMetadataNestedTypes (
    self )
```

Get the metadata along with container type.

Returns

string of container and metadata

6.48.3.4 getMetadataType()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.getMetadataType (
    self )
```

Get metadata type.

Returns

String: container type

6.48.3.5 getObjects()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.getObjects (
    self )
```

retrieve the current container as a list

Returns

Current container being used as a list

6.48.3.6 perturb()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.perturb (
    self )
```

choose one of the containers as an alternative and perturb its parameters

6.48.3.7 reset()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.reset (
    self )
```

Reset the current chosen [StageContainer](#).

```
self.currentContainer.reset()
```

6.48.3.8 run()

```
def skdiscovery.data_structure.framework.StageContainerAlternative.run (
    self,
    obj_data_container )
```

Run the currently selected stage container.

Parameters

<i>obj_data_container</i>	Data container to be passed to the current stagecontainer
---------------------------	---

6.48.4 Member Data Documentation

6.48.4.1 `currentContainer` [1/2]

```
list skdiscovery.data_structure.framework.StageContainerAlternative.currentContainer = [] [static]
```

6.48.4.2 `currentContainer` [2/2]

```
skdiscovery.data_structure.framework.StageContainerAlternative.currentContainer
```

6.48.4.3 `list_stagecontainers`

```
skdiscovery.data_structure.framework.StageContainerAlternative.list_stagecontainers
```

The documentation for this class was generated from the following file:

- data_structure/framework/[stagecontainers.py](#)

6.49 skdiscovery.data_structure.framework.StageContainerIncrementalAdd Class Reference

In each perturb call, it incrementally adds one of the filters specified in the constructor.

Public Member Functions

- def `__init__` (self, list_stagecontainers)
Initialize the container.
- def `reset` (self)
Reset the container so that it will only run the first stage container again.
- def `run` (self, obj_data_container)
Run the current list of stage containers.
- def `perturb` (self)
Add another stage container to the current list of stage containers.
- def `getMetadata` (self)
Return the metadata from the currently used stage containers.
- def `getObjects` (self)
Retrieve objects in the current list of stage containers.
- def `getMetadataType` (self)
Get metadata type.
- def `getMetadataNestedTypes` (self)
Get the metadata along with container type.
- def `getMetadataNestedGraph` (self)
Get the nested graph for the container.

Public Attributes

- `length`
- `list_AllStagecontainers`
- `currentindex`
- `list_currentContainers`

6.49.1 Detailed Description

In each perturb call, it incrementally adds one of the filters specified in the constructor.

6.49.2 Constructor & Destructor Documentation

6.49.2.1 `__init__()`

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.__init__ (
    self,
    list_stagecontainers )
```

Initialize the container.

Parameters

<i>list_stagecontainers</i>	List of stage containers.
-----------------------------	---------------------------

6.49.3 Member Function Documentation

6.49.3.1 getMetadata()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.getMetadata (
    self )
```

Return the metadata from the currently used stage containers.

Returns

List of metadata from current containers

6.49.3.2 getMetadataNestedGraph()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.getMetadataNestedGraph (
    self )
```

Get the nested graph for the container.

Returns

String: Container subgraph

6.49.3.3 getMetadataNestedTypes()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.getMetadataNestedTypes (
    self )
```

Get the metadata along with container type.

Returns

string of container and metadata

6.49.3.4 getMetadataType()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.getMetadataType (  
    self )
```

Get metadata type.

Returns

String: container type

6.49.3.5 getObjects()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.getObjects (  
    self )
```

Retrieve objects in the current list of stage containers.

Returns

List of current obj_content from the current list of stage containers

6.49.3.6 perturb()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.perturb (  
    self )
```

Add another stage container to the current list of stage containers.

6.49.3.7 reset()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.reset (  
    self )
```

Reset the container so that it will only run the first stage container again.

6.49.3.8 run()

```
def skdiscovery.data_structure.framework.StageContainerIncrementalAdd.run (
    self,
    obj_data_container )
```

Run the current list of stage containers.

6.49.4 Member Data Documentation

6.49.4.1 currentindex

skdiscovery.data_structure.framework.StageContainerIncrementalAdd.currentindex

6.49.4.2 length

skdiscovery.data_structure.framework.StageContainerIncrementalAdd.length

6.49.4.3 list_AllStagecontainers

skdiscovery.data_structure.framework.StageContainerIncrementalAdd.list_AllStagecontainers

6.49.4.4 list_currentContainers

skdiscovery.data_structure.framework.StageContainerIncrementalAdd.list_currentContainers


The documentation for this class was generated from the following file:

- data_structure/framework/[stagecontainers.py](#)

6.50 skdiscovery.data_structure.table.filters.TableFilter Class Reference

This class removes tables based on their label.

Inheritance diagram for skdiscovery.data_structure.table.filters.TableFilter:



Public Member Functions

- def `__init__` (self, `str_description`, `ap_paramList`)
Initialize Table Filter.
- def `process` (self, `obj_data`)
Apply geolocation filter to data set.
- def `perturbParams` (self)
choose other random value for all parameters
- def `resetParams` (self)
set all parameters to initial value
- def `__str__` (self)
String represntation of object.
- def `getMetadata` (self)
Retrieve metadata about filter.

Public Attributes

- `str_description`
- `ap_paramList`
- `ap_paramNames`

6.50.1 Detailed Description

This class removes tables based on their label.

6.50.2 Constructor & Destructor Documentation

6.50.2.1 `__init__`()

```
def skdiscovery.data_structure.table.filters.TableFilter.__init__ (
    self,
    str_description,
    ap_paramList )
```

Initialize Table Filter.

Parameters

<i>str_description</i>	String describing this filter
<i>ap_paramList[ap_label_list]</i>	AutoList of table labels to remove

6.50.3 Member Function Documentation

6.50.3.1 `__str__()`

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String representation of object.

Returns

String listing all current parameters

6.50.3.2 `getMetadata()`

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.50.3.3 `perturbParams()`

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.50.3.4 `process()`

```
def skdiscovery.data_structure.table.filters.TableFilter.process (
    self,
    obj_data )
```

Apply geolocation filter to data set.

Parameters

<i>obj_data</i>	Table data wrapper
-----------------	--------------------

6.50.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.50.4 Member Data Documentation

6.50.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.50.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.50.4.3 str_description

```
skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/table_filter.py](#)

6.51 skdiscovery.data_structure.series.filters.TrendFilter Class Reference

Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

Inheritance diagram for skdiscovery.data_structure.series.filters.TrendFilter:



Public Member Functions

- def `__init__` (self, str_description, ap_paramList)
Initialize Trend Filter.
- def `process` (self, obj_data)
Apply trend filter to data set.

Public Attributes

- `ap_paramNames`

6.51.1 Detailed Description

Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

6.51.2 Constructor & Destructor Documentation

6.51.2.1 `__init__`()

```
def skdiscovery.data_structure.series.filters.TrendFilter.__init__ (
    self,
    str_description,
    ap_paramList )
```

Initialize Trend Filter.

Parameters

<code>str_description</code>	String describing filter
<code>ap_paramList[list_trendTypes]</code>	List of trend types. List can contain any mix of "linear", "annual", or "semiannual".
Generated by Doxygen	The default is to remove the linear, annual, and semiannual trends

6.51.3 Member Function Documentation

6.51.3.1 process()

```
def skdiscovery.data_structure.series.filters.TrendFilter.process (
    self,
    obj_data )
```

Apply trend filter to data set.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.51.4 Member Data Documentation

6.51.4.1 ap_paramNames

```
skdiscovery.data_structure.series.filters.TrendFilter.ap_paramNames
```


The documentation for this class was generated from the following file:

- data_structure/series/filters/[trend.py](#)

6.52 skdiscovery.data_structure.table.filters.TrendFilter Class Reference

Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

Inheritance diagram for skdiscovery.data_structure.table.filters.TrendFilter:



Public Member Functions

- def `__init__` (self, str_description, ap_paramList, columns=None)
Initialize Trend Filter.
- def `process` (self, obj_data)
Apply trend filter to data set.

Public Attributes

- `columns`
- `ap_paramNames`

6.52.1 Detailed Description

Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

Works on table data

6.52.2 Constructor & Destructor Documentation

6.52.2.1 `__init__()`

```
def skdiscovery.data_structure.table.filters.TrendFilter.__init__ (
    self,
    str_description,
    ap_paramList,
    columns = None )
```

Initialize Trend Filter.

Parameters

<code>str_description</code>	String describing filter
<code>ap_paramList[list_trendTypes]</code>	List of trend types. List can contain "linear", "annual", or "semiannual"
<code>columns</code>	List of column names to filter

6.52.3 Member Function Documentation

6.52.3.1 process()

```
def skdiscovery.data_structure.table.filters.TrendFilter.process (
    self,
    obj_data )
```

Apply trend filter to data set.

Parameters

<i>obj_data</i>	Input data. Changes are made in place.
-----------------	--

6.52.4 Member Data Documentation

6.52.4.1 ap_paramNames

```
skdiscovery.data_structure.table.filters.TrendFilter.ap_paramNames
```

6.52.4.2 columns

```
skdiscovery.data_structure.table.filters.TrendFilter.columns
```


The documentation for this class was generated from the following file:

- [data_structure/table/filters/trend.py](#)

6.53 skdiscovery.data_structure.table.filters.WeightedAverage Class Reference

This filter performs a rolling weighted average using standard deviations as weight.

Inheritance diagram for `skdiscovery.data_structure.table.filters.WeightedAverage`:



Public Member Functions

- `def __init__ (self, str_description, ap_paramList, column_names, std_dev_column_names=None, propagate_↵ uncertainties=False)`
Initializes a [WeightedAverage](#) object.
- `def process (self, obj_data)`
Apply the moving (weighted) average filter to a table data wrapper.n.
- `def perturbParams (self)`
choose other random value for all parameters
- `def resetParams (self)`
set all parameters to initial value
- `def __str__ (self)`
String representation of object.
- `def getMetadata (self)`
Retrieve metadata about filter.

Public Attributes

- `column_names`
- `std_dev_column_names`
- `propagate_uncertainties`
- `str_description`
- `ap_paramList`
- `ap_paramNames`

6.53.1 Detailed Description

This filter performs a rolling weighted average using standard deviations as weight.

6.53.2 Constructor & Destructor Documentation

6.53.2.1 __init__()

```
def skdiscovery.data_structure.table.filters.WeightedAverage.__init__ (  
    self,  
    str_description,  
    ap_paramList,  
    column_names,  
    std_dev_column_names = None,  
    propagate_uncertainties = False )
```

Initializes a [WeightedAverage](#) object.

Parameters

<i>str_description</i>	String describing filter
<i>ap_paramList[window]</i>	Window to use for computing rolling weighted average
<i>column_names</i>	Names of columns to apply the weighted average
<i>std_dev_column_names</i>	Names of columns of the standard deviations. If none a regular mean is computed.
<i>propagate_unceratinies</i>	Propagate uncertainties assuming uncorrelated errors

6.53.3 Member Function Documentation

6.53.3.1 __str__()

```
def skdiscovery.data_structure.framework.PipelineItem.__str__ (
    self ) [inherited]
```

String represntation of object.

Returns

String listing all currenter parameters

6.53.3.2 getMetadata()

```
def skdiscovery.data_structure.framework.PipelineItem.getMetadata (
    self ) [inherited]
```

Retrieve metadata about filter.

Returns

String containing the item description and current parameters for filter.

6.53.3.3 perturbParams()

```
def skdiscovery.data_structure.framework.PipelineItem.perturbParams (
    self ) [inherited]
```

choose other random value for all parameters

6.53.3.4 process()

```
def skdiscovery.data_structure.table.filters.WeightedAverage.process (
    self,
    obj_data )
```

Apply the moving (weighted) average filter to a table data wrapper.n.

Changes are made in place.

Parameters

<i>obj_data</i>	Input table data wrapper
-----------------	--------------------------

6.53.3.5 resetParams()

```
def skdiscovery.data_structure.framework.PipelineItem.resetParams (
    self ) [inherited]
```

set all parameters to initial value

6.53.4 Member Data Documentation

6.53.4.1 ap_paramList

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramList [inherited]
```

6.53.4.2 ap_paramNames

```
skdiscovery.data_structure.framework.PipelineItem.ap_paramNames [inherited]
```

6.53.4.3 column_names

```
skdiscovery.data_structure.table.filters.WeightedAverage.column_names
```

6.53.4.4 propagate_uncertainties

```
skdiscovery.data_structure.table.filters.WeightedAverage.propagate_uncertainties
```

6.53.4.5 std_dev_column_names

```
skdiscovery.data_structure.table.filters.WeightedAverage.std_dev_column_names
```

6.53.4.6 str_description

```
skdiscovery.data_structure.framework.PipelineItem.str_description [inherited]
```

The documentation for this class was generated from the following file:

- [data_structure/table/filters/weighted_average.py](#)

Chapter 7

File Documentation

7.1 data_structure/framework/base.py File Reference

Classes

- class [skdiscovery.data_structure.framework.PipelineItem](#)
The general class used to create pipeline items.

Namespaces

- [skdiscovery.data_structure.framework.base](#)

7.2 data_structure/framework/config.py File Reference

Namespaces

- [skdiscovery.data_structure.framework.config](#)

Functions

- def [skdiscovery.data_structure.framework.config.getConfig \(\)](#)
Retrieve skdiscovery configuration.
- def [skdiscovery.data_structure.framework.config.writeConfigValue \(section, key, value\)](#)
Write config to disk.
- def [skdiscovery.data_structure.framework.config.getDispyPassword \(\)](#)
Get dispy password.
- def [skdiscovery.data_structure.framework.config.getHostName \(\)](#)
Get Host name for displaying link to dispy status.

7.3 data_structure/framework/discoverypipeline.py File Reference

Classes

- class [skdiscovery.data_structure.framework.DiscoveryPipeline](#)
Pipeline for running the analysis.

Namespaces

- [skdiscovery.data_structure.framework.discoverypipeline](#)

7.4 data_structure/framework/stagecontainers.py File Reference

Classes

- class [skdiscovery.data_structure.framework.StageContainer](#)
Container to hold a stage for the DiscoveryPipeline.
- class [skdiscovery.data_structure.framework.StageContainerAlternative](#)
Stage Container that holds a list of stage containers and randomly chooses one to use.
- class [skdiscovery.data_structure.framework.StageContainerIncrementalAdd](#)
In each perturb call, it incrementally adds one of the filters specified in the constructor.

Namespaces

- [skdiscovery.data_structure.framework.stagecontainers](#)

7.5 data_structure/generic/accumulators/data.py File Reference

Classes

- class [skdiscovery.data_structure.generic.accumulators.DataAccumulator](#)
Stores a copy of the data in its current state in the pipeline.

Namespaces

- [skdiscovery.data_structure.generic.accumulators.data](#)

7.6 data_structure/generic/accumulators/gpshplotter.py File Reference

Classes

- class [skdiscovery.data_structure.generic.accumulators.GPSHPlotter](#)
Plots results from General_Component_Analysis, for the GPS horizontal or vertical components.

Namespaces

- [skdiscovery.data_structure.generic.accumulators.gpshplotter](#)

7.7 data_structure/generic/accumulators/hcluster.py File Reference

Classes

- class [skdiscovery.data_structure.generic.accumulators.HCluster](#)
Hierarchical Clustering function that produces a cluster map of the distance matrix.

Namespaces

- [skdiscovery.data_structure.generic.accumulators.hcluster](#)

7.8 data_structure/series/accumulators/plotter.py File Reference

Classes

- class [skdiscovery.data_structure.series.accumulators.Plotter](#)
Make a plot of series data.

Namespaces

- [skdiscovery.data_structure.series.accumulators.plotter](#)

7.9 data_structure/table/accumulators/plotter.py File Reference

Classes

- class [skdiscovery.data_structure.table.accumulators.Plotter](#)
Make a plot of table data.

Namespaces

- [skdiscovery.data_structure.table.accumulators.plotter](#)

7.10 data_structure/series/analysis/correlate.py File Reference

Classes

- class [skdiscovery.data_structure.series.analysis.Correlate](#)
Computes the correlation for series data.

Namespaces

- [skdiscovery.data_structure.series.analysis.correlate](#)

7.11 data_structure/table/analysis/correlate.py File Reference

Classes

- class [skdiscovery.data_structure.table.analysis.Correlate](#)
Computes the correlation for table data and stores the result as a matrix.

Namespaces

- [skdiscovery.data_structure.table.analysis.correlate](#)

7.12 data_structure/series/analysis/gca.py File Reference

Classes

- class [skdiscovery.data_structure.series.analysis.General_Component_Analysis](#)
Performs either ICA or PCA analysis on series data.

Namespaces

- [skdiscovery.data_structure.series.analysis.gca](#)

7.13 data_structure/table/analysis/gca.py File Reference

Classes

- class [skdiscovery.data_structure.table.analysis.General_Component_Analysis](#)
Performs a general component analysis on table data.

Namespaces

- [skdiscovery.data_structure.table.analysis.gca](#)

7.14 data_structure/series/analysis/mogi.py File Reference

Classes

- class [skdiscovery.data_structure.series.analysis.Mogi_Inversion](#)
Perform a Mogi source inversion on a set of gps series data.

Namespaces

- [skdiscovery.data_structure.series.analysis.mogi](#)

Functions

- def [skdiscovery.data_structure.series.analysis.MogiVectors](#) (mogi_res, station_lat_list, station_lon_list, flag3D=False)
Creates a set of Mogi vectors for plotting.

7.15 data_structure/table/analysis/mogi.py File Reference

Classes

- class [skdiscovery.data_structure.table.analysis.Mogi_Inversion](#)
Perform a mogi source inversion on a set of gps table data.

Namespaces

- [skdiscovery.data_structure.table.analysis.mogi](#)

Functions

- def [skdiscovery.data_structure.table.analysis.MogiVectors](#) (mogi_res, station_lat_list, station_lon_list, flag3D=False)
Creates a set of mogi vectors for plotting.

7.16 data_structure/series/filters/dataremove.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.DataRemover](#)
Sets specified series data to NaN.

Namespaces

- [skdiscovery.data_structure.series.filters.dataremove](#)

7.17 data_structure/table/filters/dataremove.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.DataRemover](#)
Sets specified table data to NaN.

Namespaces

- [skdiscovery.data_structure.table.filters.dataremove](#)

7.18 data_structure/series/filters/hyperbolictan.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.HTanFilter](#)
Filter to subtract arctan fit from data.

Namespaces

- [skdiscovery.data_structure.series.filters.hyperbolictan](#)

7.19 data_structure/table/filters/hyperbolictan.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.HTanFilter](#)
Filter to subtract an arctan fit from data.

Namespaces

- [skdiscovery.data_structure.table.filters.hyperbolictan](#)

7.20 data_structure/series/filters/interpolate.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.InterpolateFilter](#)
Interpolate missing values on series data.

Namespaces

- [skdiscovery.data_structure.series.filters.interpolate](#)

7.21 data_structure/table/filters/interpolate.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.InterpolateFilter](#)
Interpolate missing values on table data.

Namespaces

- [skdiscovery.data_structure.table.filters.interpolate](#)

7.22 data_structure/series/filters/kalman.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.KalmanFilter](#)
Runs a Kalman Smoother on series data.

Namespaces

- [skdiscovery.data_structure.series.filters.kalman](#)

7.23 data_structure/table/filters/kalman.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.KalmanFilter](#)
Runs a Kalman Smoother on table data.

Namespaces

- [skdiscovery.data_structure.table.filters.kalman](#)

7.24 data_structure/series/filters/lowpass.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.LowPassFilter](#)
A FIR Remez (Parks-McLellan) designed low pass filter for series data.

Namespaces

- [skdiscovery.data_structure.series.filters.lowpass](#)

7.25 data_structure/table/filters/lowpass.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.LowPassFilter](#)
A remez low pass filter for table data.

Namespaces

- [skdiscovery.data_structure.table.filters.lowpass](#)

7.26 data_structure/series/filters/median.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.MedianFilter](#)
A Median filter for series data.

Namespaces

- [skdiscovery.data_structure.series.filters.median](#)

7.27 data_structure/table/filters/median.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.MedianFilter](#)
A Median filter for table data.

Namespaces

- [skdiscovery.data_structure.table.filters.median](#)

7.28 data_structure/series/filters/offset_detrend.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.OffsetDetrend](#)
Trend filter that fits a stepwise function to linearly detrended series data.

Namespaces

- [skdiscovery.data_structure.series.filters.offset_detrend](#)

7.29 data_structure/table/filters/offset_detrend.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.OffsetDetrend](#)
Trend filter that fits a stepwise function to linearly detrended table data.

Namespaces

- [skdiscovery.data_structure.table.filters.offset_detrend](#)

7.30 data_structure/series/filters/trend.py File Reference

Classes

- class [skdiscovery.data_structure.series.filters.TrendFilter](#)
Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

Namespaces

- [skdiscovery.data_structure.series.filters.trend](#)

7.31 data_structure/table/filters/trend.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.TrendFilter](#)
Trend Filter that removes linear and sinusoidal (annual, semi-annual) trends on series data.

Namespaces

- [skdiscovery.data_structure.table.filters.trend](#)

7.32 data_structure/table/analysis/dbscan.py File Reference

Classes

- class [skdiscovery.data_structure.table.analysis.DBScan](#)
Runs [DBScan](#) on table data.

Namespaces

- [skdiscovery.data_structure.table.analysis.dbscan](#)

7.33 data_structure/table/analysis/midas.py File Reference

Classes

- class [skdiscovery.data_structure.table.analysis.MIDAS](#)
In Development A basic [MIDAS](#) trend estimator

Namespaces

- [skdiscovery.data_structure.table.analysis.midas](#)

7.34 data_structure/table/analysis/outlier.py File Reference

Classes

- class [skdiscovery.data_structure.table.analysis.Outlier](#)
Computes $(data / mad(data))$ for outlier detection.

Namespaces

- [skdiscovery.data_structure.table.analysis.outlier](#)

7.35 data_structure/table/analysis/skew.py File Reference

Classes

- class [skdiscovery.data_structure.table.analysis.Skew](#)
Calculates the skew of table data.

Namespaces

- [skdiscovery.data_structure.table.analysis.skew](#)

7.36 data_structure/table/filters/antenna_offset.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.AntennaOffset](#)
Applies corrections to fix offsets in PBO GPS data induced by antenna changes.

Namespaces

- [skdiscovery.data_structure.table.filters.antenna_offset](#)

7.37 data_structure/table/filters/calibrate_py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.CalibrateGRACE](#)
Calibrate Grace Data.

Namespaces

- [skdiscovery.data_structure.table.filters.calibrate_grace](#)

7.38 data_structure/table/filters/combine_columns.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.CombineColumns](#)
Create a new column by selecting data from a column.

Namespaces

- [skdiscovery.data_structure.table.filters.combine_columns](#)

7.39 data_structure/table/filters/geolocation.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.GeoLocationFilter](#)
Removes objects not located in a specified region.

Namespaces

- [skdiscovery.data_structure.table.filters.geolocation](#)

7.40 data_structure/table/filters/normalize.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.NormalizeFilter](#)
Normalize data using median filter.

Namespaces

- [skdiscovery.data_structure.table.filters.normalize](#)

7.41 data_structure/table/filters/propagate_nans.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.PropagateNaNs](#)
Propagates NaN's from one column to other columns.

Namespaces

- [skdiscovery.data_structure.table.filters.propagate_nans](#)

7.42 data_structure/table/filters/resample.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.Resample](#)
Resample data.

Namespaces

- [skdiscovery.data_structure.table.filters.resample](#)

7.43 data_structure/table/filters/snow_remover.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.SnowRemover](#)
Removes data with snow errors.

Namespaces

- [skdiscovery.data_structure.table.filters.snow_remover](#)

7.44 data_structure/table/filters/stabilization.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.StabilizationFilter](#)
This filter transforms GPS stations in a region to a local reference frame.

Namespaces

- [skdiscovery.data_structure.table.filters.stabilization](#)

7.45 data_structure/table/filters/table_filter.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.TableFilter](#)
This class removes tables based on their label.

Namespaces

- [skdiscovery.data_structure.table.filters.table_filter](#)

7.46 data_structure/table/filters/weighted_average.py File Reference

Classes

- class [skdiscovery.data_structure.table.filters.WeightedAverage](#)
This filter performs a rolling weighted average using standard deviations as weight.

Namespaces

- [skdiscovery.data_structure.table.filters.weighted_average](#)

7.47 data_structure/table/fusion/grace.py File Reference

Classes

- class [skdiscovery.data_structure.table.fusion.GraceFusion](#)
Fuses GRACE equivalent water depth time series.

Namespaces

- [skdiscovery.data_structure.table.fusion.grace](#)

7.48 data_structure/table/fusion/snow.py File Reference

Classes

- class [skdiscovery.data_structure.table.fusion.SnowFusion](#)
Adds snow time series data to table based on geographic coordinates.

Namespaces

- [skdiscovery.data_structure.table.fusion.snow](#)

7.49 data_structure/table/generators/catalog_generator.py File Reference

Classes

- class [skdiscovery.data_structure.table.generators.CatalogGenerator](#)
In Development Generates galaxy catalogs for use in DiscoveryPipeline

Namespaces

- [skdiscovery.data_structure.table.generators.catalog_generator](#)

7.50 data_structure/table/generators/data_generator.py File Reference

Classes

- class [skdiscovery.data_structure.table.generators.DataGenerator](#)
In Class for generating random data.

Namespaces

- [skdiscovery.data_structure.table.generators.data_generator](#)

7.51 utilities/cloud/amazon_control.py File Reference

Namespaces

- [skdiscovery.utilities.cloud.amazon_control](#)

Functions

- def [skdiscovery.utilities.cloud.amazon_control.init](#) (in_aws_access_key, in_aws_secret, in_aws_region, in_aws_security_group, in_aws_key_name, in_pem_file)
The underlying functionality for the Amazon GUI, the user should not need to directly interface with this function.
- def [skdiscovery.utilities.cloud.amazon_control.closeDispyScheduler](#) ()
Close the Dispy Scheduler.
- def [skdiscovery.utilities.cloud.amazon_control.startDispyScheduler](#) ()
Start the Dispy Scheduler.
- def [skdiscovery.utilities.cloud.amazon_control.generateInfo](#) (instance)
Read metadata from an Amazon instance.
- def [skdiscovery.utilities.cloud.amazon_control.updateStatus](#) ()
Update status information in amazon_list.
- def [skdiscovery.utilities.cloud.amazon_control.setNumInstances](#) (new_total_instances, instance_type, image_id)
Change the number of running instances.
- def [skdiscovery.utilities.cloud.amazon_control.updateIPAddress](#) (instance_info)
Update ip address of instance info.
- def [skdiscovery.utilities.cloud.amazon_control.goodConnection](#) (instance, port)
Check if an amazon instance has a port open.
- def [skdiscovery.utilities.cloud.amazon_control.createTunnels](#) ()
Create reverse ssh tunnels to all instances.
- def [skdiscovery.utilities.cloud.amazon_control.startDispyNode](#) ()
Start dispy on each Amazon instance.
- def [skdiscovery.utilities.cloud.amazon_control.resetInstances](#) ()
Reboot Amazon instances.
- def [skdiscovery.utilities.cloud.amazon_control.reset](#) ()
Close and clear Amazon List.
- def [skdiscovery.utilities.cloud.amazon_control.close](#) ()
Shutdown all instances, close dispy scheduler and clear Amazon list.
- def [skdiscovery.utilities.cloud.amazon_control.clearAmazonList](#) ()
Shutdown connection tunnels to Amazon instances and clear amazon list.

Variables

- `skdiscovery.utilities.cloud.amazon_control.aws_access_key` = None
- `skdiscovery.utilities.cloud.amazon_control.aws_secret` = None
- `skdiscovery.utilities.cloud.amazon_control.aws_region` = None
- `skdiscovery.utilities.cloud.amazon_control.aws_security_group` = None
- `skdiscovery.utilities.cloud.amazon_control.aws_key_name` = None
- `skdiscovery.utilities.cloud.amazon_control.pem_file` = None
- `skdiscovery.utilities.cloud.amazon_control.ec2_res` = None
- `skdiscovery.utilities.cloud.amazon_control.ec2_client` = None
- list `skdiscovery.utilities.cloud.amazon_control.amazon_list` = []
- `skdiscovery.utilities.cloud.amazon_control.scheduler` = None
- `skdiscovery.utilities.cloud.amazon_control.popen` = None

7.52 utilities/cloud/amazon_gui.py File Reference

Namespaces

- `skdiscovery.utilities.cloud.amazon_gui`

Functions

- def `skdiscovery.utilities.cloud.amazon_gui.init` ()
Initialize GUI for controlling Amazon instances.
- def `skdiscovery.utilities.cloud.amazon_gui.drawGUI` ()
Draw the GUI on the screen.
- def `skdiscovery.utilities.cloud.amazon_gui.changeButtonState` (enabled=True)
Enable or disable the buttons and slider in the GUI.
- def `skdiscovery.utilities.cloud.amazon_gui.checkValidValues` ()
Check if Amazon information is valid.

Variables

- `skdiscovery.utilities.cloud.amazon_gui.widget_dict` = OrderedDict()
- list `skdiscovery.utilities.cloud.amazon_gui.disable_list` = ['initialize_button', 'cache_button', 'restore_button']
- list `skdiscovery.utilities.cloud.amazon_gui.initialized_disabled_list` = ['new_num_instances_widget', 'execute_↔instances_button']
- list `skdiscovery.utilities.cloud.amazon_gui.key_value_list`
- bool `skdiscovery.utilities.cloud.amazon_gui.initialized` = False

7.53 utilities/cloud/ssh_reverse.py File Reference

Classes

- class `skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel`
Create a reverse ssh tunnel.

Namespaces

- [skdiscovery.utilities.cloud.ssh_reverse](#)

Functions

- def [skdiscovery.utilities.cloud.ssh_reverse.print_verbose](#) (s, verbose=False)
Print statement if verbose is True.
- def [skdiscovery.utilities.cloud.ssh_reverse.handler](#) (chan, host, port, verbose=False)
Handler is responsible for sending and receiving data through ssh tunnel.
- def [skdiscovery.utilities.cloud.ssh_reverse.reverse_forward_tunnel](#) (server_port, remote_host, remote_port, transport, check=30, verbose=False)
Creates a reverse ssh tunnel.

7.54 utilities/patterns/astro_tools.py File Reference

Namespaces

- [skdiscovery.utilities.patterns.astro_tools](#)

Functions

- def [skdiscovery.utilities.patterns.astro_tools.z_to_v](#) (z)
Convert redshift to km/s assuming shift is due to velocity using special relativity.
- def [skdiscovery.utilities.patterns.astro_tools.v_to_z](#) (v)
Convert km/s to redshift assuming all are using special relativity.
- def [skdiscovery.utilities.patterns.astro_tools.angular_separation](#) (ra1, dec1, ra2, dec2)
Angular separation between two objects via the haversine formula.
- def [skdiscovery.utilities.patterns.astro_tools.move_point](#) (ra, dec, ang_dist, bearing)
Move a point along a great circle at a particular bearing.
- def [skdiscovery.utilities.patterns.astro_tools.abs_mag](#) (app_mag, z)
Get the absolute magnitude from apparent magnitude.
- def [skdiscovery.utilities.patterns.astro_tools.app_mag](#) (abs_mag, z)
Get the apparent magnitude from absolute magnitude.
- def [skdiscovery.utilities.patterns.astro_tools.nfw](#) (R, norm_constant, Rs, Rcore)
2D Navarro-Frenk-White surface radial profile probability density
- def [skdiscovery.utilities.patterns.astro_tools.lf](#) (x, A, mstar, alpha)
Schechter function.
- def [skdiscovery.utilities.patterns.astro_tools.dlf](#) (x, A, m1, a1, m2, a2)
double Schechter function.
- def [skdiscovery.utilities.patterns.astro_tools.cdf_dlf](#) (x, A, m1, a1, m2, a2, start=-26)
Cumulative Schechter function.
- def [skdiscovery.utilities.patterns.astro_tools.inv_cdf_dlf](#) (p, A, m1, a1, m2, a2, start=-26, end=-15)
Inverse Cumulative Schechter function.

7.55 utilities/patterns/kalman_smoother.py File Reference

Namespaces

- [skdiscovery.utilities.patterns.kalman_smoother](#)

Functions

- def [skdiscovery.utilities.patterns.kalman_smoother.KalmanFilter](#) (in_data, t, sigma_sq, R, Pinit, x0=0, invert=False, clipping=5)
Runs the kalman filter on data.
- def [skdiscovery.utilities.patterns.kalman_smoother.FitFOGMParameters](#) (data, Pinit=100, R=1, method='brute', x0=0, clipping=5)
Find best FOGM parameters for a given data set.
- def [skdiscovery.utilities.patterns.kalman_smoother.IterativeGridSearch](#) (f, args, intervals, max_iter=50, tol=0.1, bounds=None, prev_minimum=None, verbose=False)
Find the minimum of f using an iterative grid search with 3 points per dimension.
- def [skdiscovery.utilities.patterns.kalman_smoother.KalmanSmoother](#) (in_data, Pinit=1e6, Restimate=1, clipping=5, method='simple', t=None, sigma_sq=None, R=1, verbose=False, max_clip_iter=10)
Smoother based on a forward and a backward kalman filter.
- def [skdiscovery.utilities.patterns.kalman_smoother.FOGM](#) (size, t, sigma_sq, R)
Generates data from a First Order Gaussian-Markov process.

7.56 utilities/patterns/pbo_tools.py File Reference

Namespaces

- [skdiscovery.utilities.patterns.pbo_tools](#)

Functions

- def [skdiscovery.utilities.patterns.pbo_tools.mogi](#) (xdata, y, x, source_depth, amplitude, latlon=True)
Compute the surface deformation due to changes in a mogi source.
- def [skdiscovery.utilities.patterns.pbo_tools.finite_sphere](#) (xdata, lat, lon, source_depth, amplitude, alpha_rad)
Compute the surface deformation due to changes in a finite sphere source.
- def [skdiscovery.utilities.patterns.pbo_tools.closed_pipe](#) (xdata, lat, lon, source_depth, amplitude, pipe_delta)
Compute the surface deformation due to changes in a closed pipe source.
- def [skdiscovery.utilities.patterns.pbo_tools.constant_open_pipe](#) (xdata, lat, lon, source_depth, amplitude, pipe_delta)
Compute the surface deformation due to changes in a constant width open pipe source.
- def [skdiscovery.utilities.patterns.pbo_tools.rising_open_pipe](#) (xdata, lat, lon, source_depth, amplitude, pipe_delta, open_pipe_top)
Compute the surface deformation due to changes in a rising width amplitude open pipe source.
- def [skdiscovery.utilities.patterns.pbo_tools.sill](#) (xdata, lat, lon, source_depth, amplitude)
Compute the surface deformation due to changes in a sill-like source.
- def [skdiscovery.utilities.patterns.pbo_tools.dirEigenvectors](#) (coord_list, pca_comps, pdir='H')
Takes eigenvectors (north and east) and forces them to point "outward".
- def [skdiscovery.utilities.patterns.pbo_tools.datetimeToNumber](#) (in_time)
Converts input pandas Timestamp or pandas DatetimeIndex to unix time.

7.57 utilities/patterns/random_walks.py File Reference

Namespaces

- [skdiscovery.utilities.patterns.random_walks](#)

Functions

- def [skdiscovery.utilities.patterns.random_walks.uniform_walk](#) (pos, grid, step_size=None)
A uniform random walk function.
- def [skdiscovery.utilities.patterns.random_walks.gaussian_walk](#) (pos, grid, step_size=None)
A gaussian random walk function.
- def [skdiscovery.utilities.patterns.random_walks.keep_in_bound](#) (pos, grid)
Function for truncating and bounding the random walk to within the defined grid.

7.58 utilities/patterns/trend_tools.py File Reference

Namespaces

- [skdiscovery.utilities.patterns.trend_tools](#)

Functions

- def [skdiscovery.utilities.patterns.trend_tools.getTrend](#) (xdata)
The getTrend function applies the signal.detrend function.
- def [skdiscovery.utilities.patterns.trend_tools.sinuFits](#) (xdata, fitN=2, rmve=1)
The sinuFits function fits annual and semi-annual sinusoid trends.
- def [skdiscovery.utilities.patterns.trend_tools.interpNaN](#) (data)
Interpolate data using a linear interpolation.
- def [skdiscovery.utilities.patterns.trend_tools.medianFilter](#) (data, window, interpolate=True)
A median filter.

7.59 utilities/planetary/map_util.py File Reference

Classes

- class [skdiscovery.utilities.planetary.map_util.Planet](#)
A class for storing variables about a planetary body.

Namespaces

- [skdiscovery.utilities.planetary.map_util](#)

Functions

- def [skdiscovery.utilities.planetary.map_util.sanitize_latlon](#) (lat_lon_tuple, ppd=1, start_from_90N=False)
Wraps around latitude & longitudes, including interpretation of points past the poles.
- def [skdiscovery.utilities.planetary.map_util.trim_map](#) (array, ppd, nswe, lat_npole=90, lon_offset=0)
Returns a copy of a map/array trimmed to the given N, S, W, E extents.
- def [skdiscovery.utilities.planetary.map_util.calc_slopes](#) (topo_array, ppd, planet, scaled=True, nswe="global", lon_offset=0, lat_npole=90)
Calculate a slope map from a topographic dataset.
- def [skdiscovery.utilities.planetary.map_util.wgs84_distance](#) (point1, point2, planet=Planet("wgs84"), miles=False)
Vincenty distance adapted from public domain vincenty package.
- def [skdiscovery.utilities.planetary.map_util.global_coords](#) (x_in, y_in, coeffs)
Transform pixel coordinates into global coords using affine transformation coefficients.
- def [skdiscovery.utilities.planetary.map_util.gps_to_pixel](#) (gpsmethod, gps_coord, bounds)
Function for finding the pixel coordinate associated with a gps coordinate.

7.60 visualization/emd_plot.py File Reference

Namespaces

- [skdiscovery.visualization.emd_plot](#)

Functions

- def [skdiscovery.visualization.emd_plot.calc_imfs](#) (rawData, nbsym=False)
IMF calculation function, streamlined and quieted.
- def [skdiscovery.visualization.emd_plot.calc_imfs_sum](#) (imfs, highNum=2, high=True, residual=False)
IMF summation helper function.
- def [skdiscovery.visualization.emd_plot.plot_imfs](#) (rawData, imfs, toPlot=[], mainTitle='IMFs', show=True, figsize=(12, 10))
Plots raw data and IMFs in a subplot grid (n Imfs [rows] x 1 [col])
- def [skdiscovery.visualization.emd_plot.plot_imfs_split](#) (rawData, imfs, highNum=2, residual=False, mainTitle='Raw data', collage=False, show=True)
Plots raw data and summed IMFs based on HF/LF cut, can optionally plot the residual separately from LF.
- def [skdiscovery.visualization.emd_plot.plot_imfs_split_comp](#) (rawData, imfs, highNums=[2, residual=False, plotRaw=True, mainTitle='Raw data', collage=False, show=True)
Like plot_imfs_split, plots raw data and summed IMFs based on two HF/LF cuts.
- def [skdiscovery.visualization.emd_plot.plot_imfs_noise](#) (imfs, guessType='high', noiseNum=2, collage=False, show=True)
Plots assumed noise from IMF summation in a histogram, with overlaid graphs of fit probability distributions to check if assumption can be validated.
- def [skdiscovery.visualization.emd_plot.run_plotImfs](#) (inData, imfs=None, nbsym=False, toPlot=[], mainTitle='IMFs', show=True, figsize=(12, 10))
Wrapper for plot_imfs.
- def [skdiscovery.visualization.emd_plot.run_plotImfsSplit](#) (inData, imfs=None, nbsym=False, highNum=2, residual=False, mainTitle='Raw data', collage=False, show=True)

- Wrapper for `plot_imfs_split`.
 - def [skdiscovery.visualization.emd_plot.run_plotImfsSplitComp](#) (inData, imfs=None, nbsym=False, highNums=[2, residual=False, plotRaw=True, mainTitle='Raw data', collage=False, show=True)
- Wrappper for `plot_imfs_split_comp`.
 - def [skdiscovery.visualization.emd_plot.run_plotImfsNoise](#) (inData, imfs=None, nbsym=False, noiseNum=2, guessType='high', show=True)
- Wrapper for `plot_imfs_noise`.
 - def [skdiscovery.visualization.emd_plot.run_plotImfsSplitNoise](#) (inData, imfs=None, nbsym=False, highNum=2, residual=False, mainTitle='Raw data', noiseNum=2, guessType='high', show=False)
- Wrapper for both `plot_imfs_split` and `plot_imfs_noise`.

7.61 visualization/fourier_plot.py File Reference

Namespaces

- [skdiscovery.visualization.fourier_plot](#)

Functions

- def [skdiscovery.visualization.fourier_plot.calc_DFT](#) (t, y)
 - Calculates discrete Fourier transform using `np.fft.fft`.
- def [skdiscovery.visualization.fourier_plot.plot_DFT](#) (tIndex, yData, collage=False, show=True, supitle="", hori=True)
 - Plots input data and Fourier transformed coefficients in a subplot grid.
- def [skdiscovery.visualization.fourier_plot.run_plotDFT](#) (inData, inIndex=None, collage=False, show=True, supitle="", hori=True)
 - Wrapper for `plot_DFT`.

7.62 visualization/linear_decomposition_plot.py File Reference

Namespaces

- [skdiscovery.visualization.linear_decomposition_plot](#)

Functions

- def [skdiscovery.visualization.linear_decomposition_plot.lin_trend](#) (inData)
 - Calculates a linear polynomial fit and evaluates.
- def [skdiscovery.visualization.linear_decomposition_plot.calc_lin_interp](#) (inData, iterStep=100)
 - Calculates a piecewise linear interpolated fit for some data.
- def [skdiscovery.visualization.linear_decomposition_plot.plot_lin_trend](#) (inData, plotIndex=None, show=True)
 - Plots a linear linear trend against its source data.
- def [skdiscovery.visualization.linear_decomposition_plot.plot_lin_interp](#) (inData, interps=None, plotIndex=None, iterSteps=[100], pRange=[], mainTitle='Piecewise Decomposition', plotReal=True, show=True)
 - Plots linear interpolation against its source data.
- def [skdiscovery.visualization.linear_decomposition_plot.plot_lin_slope](#) (inData, interps=None, plotIndex=None, mainTitle='Piecewise Decomposition and Slopes', iterSteps=[100], pRange=[], plotReal=True, show=True)
 - Plots raw data, linear interpolated data, and interpolated slope.

7.63 visualization/multi_ca_plot.py File Reference

Namespaces

- [skdiscovery.visualization.multi_ca_plot](#)

Functions

- def [skdiscovery.visualization.multiCaPlot](#) (pipeline, mogiFlag=False, offset=.15, direction='H', pca_comp=0, scaleFactor=2.5, map_res='i')

The multiCaPlot function generates a geographic eigenvector plot of several pipeline runs.

7.64 visualization/multi_dist.py File Reference

Namespaces

- [skdiscovery.visualization.multi_dist](#)

Functions

- def [skdiscovery.visualization.calc_distance_map](#) (pipeline, ap_name, ca_name, ca_type, plotFlag=True, hist←
ldx=False, fontsize=10)

Calculates distances/similarities between pipeline runs.

7.65 visualization/spherical_voronoi.py File Reference

Namespaces

- [skdiscovery.visualization.spherical_voronoi](#)

Functions

- def [skdiscovery.visualization.spherical_voronoi.sphericalToXYZ](#) (lat, lon, radius=1)
Convert spherical coordinates to x,y,z.
- def [skdiscovery.visualization.spherical_voronoi.xyzToSpherical](#) (x, y, z)
Convert x,y,z to spherical coordinates.
- def [skdiscovery.visualization.spherical_voronoi.find_match](#) (region_index, region_list)
Find neighboring regions.
- def [skdiscovery.visualization.spherical_voronoi.getVoronoiCollection](#) (data, lat_name, lon_name, bmap=None, v_name=None, full_sphere=False, max_v=.3, min_v=-0.3, cmap=matplotlib.cm.get_cmap('jet'), test_point=None, proj1=None, proj2=None, kwargs)

Perform a Spherical Voronoi Tessellation on the input data.

7.66 visualization/spiral_plot.py File Reference

Namespaces

- [skdiscovery.visualization.spiral_plot](#)

Functions

- def [skdiscovery.visualization.spiral_plot.plot_spiral](#) (plotData, plotIndex, T, mainTitle='Spiral plot', barLabel='Amplitude', plotTS=False, show=True)
Plots data in a spiral pattern via a polar plot.
- def [skdiscovery.visualization.spiral_plot.run_spiral](#) (inData, period, inIndex=None, mainTitle='Spiral plot', barLabel='Amplitude', plotTS=False, show=True)
Wrapper for plot_spiral.
- def [skdiscovery.visualization.spiral_plot.run_spiralInteractive](#) (inData, period, pParams=[], inIndex=None, mainTitle='Spiral plot', barLabel='Amplitude', plotTS=False)
Wrapper for plot_spiral that is interactive when used in Jupyter notebooks.

7.67 visualization/vis_utils.py File Reference

Namespaces

- [skdiscovery.visualization.vis_utils](#)

Functions

- def [skdiscovery.visualization.vis_utils.lin_trend](#) (inData, toReturn='eval')
- def [skdiscovery.visualization.vis_utils.index_scale](#) (toScale, endRange=[])
- def [skdiscovery.visualization.vis_utils.block_output](#) ()
- def [skdiscovery.visualization.vis_utils.enable_output](#) ()
- def [skdiscovery.visualization.vis_utils.mod_data](#) (inData, inIndex=None, makeType=None)
modifies data for run_spiral so that plotted data is uniform

Variables

- list [skdiscovery.visualization.vis_utils.types](#) = [int, float, complex, np.float32, np.float64, np.int32, np.int64, np.complex64, np.complex128,]
- dictionary [skdiscovery.visualization.vis_utils.coldict](#) = {0 : 'C0', 1 : 'C1', 2 : 'C2', 3 : 'C3', 4 : 'C4', 5 : 'C5', 6 : 'C6', 7 : 'C7', 8 : '#92C7Ed', 9 : '#FFBB80', 10 : '#9BE49B', 11 : '#EB9393', 12 : '#C0A6D8', 13 : '#D2B3AC', 14 : '#E995D0', 15 : '#BFBFBF'}

7.68 visualization/wavelets_plot.py File Reference

Namespaces

- [skdiscovery.visualization.wavelets_plot](#)

Functions

- def [skdiscovery.visualization.wavelets_plot.calc_wp_deconstruct](#) (calcData, wavelet=None)
simple function to calculate a wavelet deconstruction
- def [skdiscovery.visualization.wavelets_plot.calc_wp_reconstruct](#) (deconPacket=None, calcData=None, wavelet=None, reconNodes=[])
- def [skdiscovery.visualization.wavelets_plot.plot_wp_deconstruct](#) (deconPacket, deconNodes=[], mainTitle='Wavelet Deconstruction', plotRaw=True, show=True)
- def [skdiscovery.visualization.wavelets_plot.plot_wp_showall](#) (deconPacket, deconNodes=[], mainTitle='Individual Wavelet Nodes', plotRaw=True, show=True)
- def [skdiscovery.visualization.wavelets_plot.plot_wp_reconstruct](#) (reconPacket, calcData, mainTitle='Wavelet Reconstruction', plotRaw=True, show=True)
- def [skdiscovery.visualization.wavelets_plot.run_plotWPDecon](#) (inData, wavelet=None, deconNodes=[], mainTitle='Wavelet Deconstruction', plotRaw=True, show=True)
- def [skdiscovery.visualization.wavelets_plot.run_plotWPRecon](#) (inData, wavelet=None, reconNodes=[], mainTitle='Individual Wavelet Nodes', plotRaw=True, show=True)
- def [skdiscovery.visualization.wavelets_plot.run_plotWPShowall](#) (inData, wavelet=None, deconNodes=[], mainTitle='Wavelet Reconstruction', plotRaw=True, show=True)

Index

`__del__`
 skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
 Tunnel, [200](#)

`__init__`
 skdiscovery::data_structure::framework::base::↔
 PipelineItem, [180](#)
 skdiscovery::data_structure::framework::discoverypipeline↔
 ::DiscoveryPipeline, [114](#)
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainer, [212](#)
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainerAlternative, [216](#)
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainerIncrementalAdd, [220](#)
 skdiscovery::data_structure::generic::accumulators↔
 ::gpsplotter::GPSHPlotter, [128](#)
 skdiscovery::data_structure::generic::accumulators↔
 ::hcluster::HCluster, [136](#)
 skdiscovery::data_structure::series::accumulators↔
 ::plotter::Plotter, [186](#)
 skdiscovery::data_structure::series::analysis↔
 ::correlate::Correlate, [102](#)
 skdiscovery::data_structure::series::analysis:gca::↔
 General_Component_Analysis, [120](#)
 skdiscovery::data_structure::series::analysis::mogi↔
 ::Mogi_Inversion, [163](#)
 skdiscovery::data_structure::series::filters::dataremover↔
 ::DataRemover, [110](#)
 skdiscovery::data_structure::series::filters::hyperbolictan↔
 ::HTanFilter, [141](#)
 skdiscovery::data_structure::series::filters::kalman↔
 ::KalmanFilter, [147](#)
 skdiscovery::data_structure::series::filters::lowpass↔
 ::LowPassFilter, [152](#)
 skdiscovery::data_structure::series::filters::median↔
 ::MedianFilter, [155](#)
 skdiscovery::data_structure::series::filters::offset↔
 detrend::OffsetDetrend, [171](#)
 skdiscovery::data_structure::series::filters::trend::↔
 TrendFilter, [227](#)
 skdiscovery::data_structure::table::accumulators↔
 ::plotter::Plotter, [189](#)
 skdiscovery::data_structure::table::analysis::correlate↔
 ::Correlate, [100](#)
 skdiscovery::data_structure::table::analysis::dbscan↔
 ::DBScan, [112](#)
 skdiscovery::data_structure::table::analysis::gca::↔
 General_Component_Analysis, [123](#)
 skdiscovery::data_structure::table::analysis::midas↔
 ::MIDAS, [160](#)
 skdiscovery::data_structure::table::analysis::mogi::↔
 Mogi_Inversion, [166](#)
 skdiscovery::data_structure::table::analysis::outlier↔
 ::Outlier, [177](#)
 skdiscovery::data_structure::table::filters::antenna↔
 _offset::AntennaOffset, [88](#)
 skdiscovery::data_structure::table::filters::calibrate↔
 _grace::CalibrateGRACE, [90](#)
 skdiscovery::data_structure::table::filters::combine↔
 _columns::CombineColumns, [97](#)
 skdiscovery::data_structure::table::filters::dataremover↔
 ::DataRemover, [107](#)
 skdiscovery::data_structure::table::filters::geolocation↔
 ::GeoLocationFilter, [125](#)
 skdiscovery::data_structure::table::filters::hyperbolictan↔
 ::HTanFilter, [137](#)
 skdiscovery::data_structure::table::filters::kalman::↔
 KalmanFilter, [149](#)
 skdiscovery::data_structure::table::filters::lowpass↔
 ::LowPassFilter, [153](#)
 skdiscovery::data_structure::table::filters::median::↔
 MedianFilter, [157](#)
 skdiscovery::data_structure::table::filters::normalize↔
 ::NormalizeFilter, [169](#)
 skdiscovery::data_structure::table::filters::offset↔
 detrend::OffsetDetrend, [175](#)
 skdiscovery::data_structure::table::filters::propagate↔
 _nans::PropagateNaNs, [192](#)
 skdiscovery::data_structure::table::filters::resample↔
 ::Resample, [196](#)
 skdiscovery::data_structure::table::filters::snow↔
 remover::SnowRemover, [207](#)
 skdiscovery::data_structure::table::filters::table↔
 filter::TableFilter, [224](#)
 skdiscovery::data_structure::table::filters::trend::↔
 TrendFilter, [229](#)
 skdiscovery::data_structure::table::filters::weighted↔
 _average::WeightedAverage, [231](#)
 skdiscovery::data_structure::table::fusion::grace::↔
 GraceFusion, [132](#)

- skdiscovery::data_structure::table::fusion::snow::←
SnowFusion, 204
- skdiscovery::data_structure::table::generators←
::catalog_generator::CatalogGenerator, 93
- skdiscovery::data_structure::table::generators←
::data_generator::DataGenerator, 105
- skdiscovery::utilities::cloud::ssh_reverse::Reverse←
Tunnel, 199
- skdiscovery::utilities::planetary::map_util::Planet, 183
- __str__
- skdiscovery::data_structure::framework::base::←
PipelineItem, 180
- skdiscovery::data_structure::framework::discoverypipeline←
::DiscoveryPipeline, 115
- skdiscovery::data_structure::table::analysis::midas←
::MIDAS, 161
- skdiscovery::data_structure::table::filters::calibrate←
_grace::CalibrateGRACE, 90
- skdiscovery::data_structure::table::filters::combine←
_columns::CombineColumns, 97
- skdiscovery::data_structure::table::filters::geolocation←
::GeoLocationFilter, 126
- skdiscovery::data_structure::table::filters::propagate←
_nans::PropagateNaNs, 193
- skdiscovery::data_structure::table::filters::resample←
::Resample, 196
- skdiscovery::data_structure::table::filters::stabilization←
::StabilizationFilter, 209
- skdiscovery::data_structure::table::filters::table_←
filter::TableFilter, 225
- skdiscovery::data_structure::table::filters::weighted←
_average::WeightedAverage, 232
- skdiscovery::data_structure::table::fusion::grace::←
GraceFusion, 132
- skdiscovery::data_structure::table::fusion::snow::←
SnowFusion, 205
- a
- skdiscovery::data_structure::series::filters::hyperbolictan←
::HTanFilter, 143
- skdiscovery::data_structure::table::filters::hyperbolictan←
::HTanFilter, 139
- skdiscovery::utilities::planetary::map_util::Planet, 184
- abs_mag
- skdiscovery::utilities::patterns::astro_tools, 39
- amazon_list
- skdiscovery::utilities::cloud::amazon_control, 33
- angular_separation
- skdiscovery::utilities::patterns::astro_tools, 40
- annotate_column
- skdiscovery::data_structure::table::accumulators←
::plotter::Plotter, 190
- annotate_data
- skdiscovery::data_structure::table::accumulators←
::plotter::Plotter, 190
- antenna_data
- skdiscovery::data_structure::table::filters::antenna←
_offset::AntennaOffset, 88
- ap_paramList
- skdiscovery::data_structure::framework::base::←
PipelineItem, 181
- skdiscovery::data_structure::series::analysis::gca::←
General_Component_Analysis, 121
- skdiscovery::data_structure::table::analysis::gca::←
General_Component_Analysis, 124
- skdiscovery::data_structure::table::analysis::midas←
::MIDAS, 162
- skdiscovery::data_structure::table::filters::calibrate←
_grace::CalibrateGRACE, 92
- skdiscovery::data_structure::table::filters::combine←
_columns::CombineColumns, 99
- skdiscovery::data_structure::table::filters::geolocation←
::GeoLocationFilter, 127
- skdiscovery::data_structure::table::filters::propagate←
_nans::PropagateNaNs, 194
- skdiscovery::data_structure::table::filters::resample←
::Resample, 198
- skdiscovery::data_structure::table::filters::stabilization←
::StabilizationFilter, 211
- skdiscovery::data_structure::table::filters::table_←
filter::TableFilter, 226
- skdiscovery::data_structure::table::filters::weighted←
_average::WeightedAverage, 234
- skdiscovery::data_structure::table::fusion::grace::←
GraceFusion, 134
- skdiscovery::data_structure::table::fusion::snow::←
SnowFusion, 206
- ap_paramNames
- skdiscovery::data_structure::framework::base::←
PipelineItem, 182
- skdiscovery::data_structure::series::analysis::gca::←
General_Component_Analysis, 121
- skdiscovery::data_structure::series::analysis::mogi←
::Mogi_Inversion, 165
- skdiscovery::data_structure::series::filters::kalman←
::KalmanFilter, 148
- skdiscovery::data_structure::series::filters::lowpass←
::LowPassFilter, 153
- skdiscovery::data_structure::series::filters::median←
::MedianFilter, 156
- skdiscovery::data_structure::series::filters::offset_←
detrend::OffsetDetrend, 173
- skdiscovery::data_structure::series::filters::trend::←
TrendFilter, 228
- skdiscovery::data_structure::table::analysis::gca::←
General_Component_Analysis, 124
- skdiscovery::data_structure::table::analysis::midas←

- skdiscovery::data_structure::table::analysis::mogi::←
Mogi_Inversion, 168
 - skdiscovery::data_structure::table::filters::calibrate←
_grace::CalibrateGRACE, 92
 - skdiscovery::data_structure::table::filters::combine←
_columns::CombineColumns, 99
 - skdiscovery::data_structure::table::filters::geolocation←
::GeoLocationFilter, 127
 - skdiscovery::data_structure::table::filters::kalman::←
KalmanFilter, 150
 - skdiscovery::data_structure::table::filters::lowpass←
::LowPassFilter, 154
 - skdiscovery::data_structure::table::filters::median::←
MedianFilter, 158
 - skdiscovery::data_structure::table::filters::offset←
detrend::OffsetDetrend, 176
 - skdiscovery::data_structure::table::filters::propagate←
_nans::PropagateNaNs, 194
 - skdiscovery::data_structure::table::filters::resample←
::Resample, 198
 - skdiscovery::data_structure::table::filters::stabilization←
::StabilizationFilter, 211
 - skdiscovery::data_structure::table::filters::table←
filter::TableFilter, 226
 - skdiscovery::data_structure::table::filters::trend::←
TrendFilter, 230
 - skdiscovery::data_structure::table::filters::weighted←
_average::WeightedAverage, 234
 - skdiscovery::data_structure::table::fusion::grace::←
GraceFusion, 134
 - skdiscovery::data_structure::table::fusion::snow::←
SnowFusion, 206
- app_mag
 - skdiscovery::utilities::patterns::astro_tools, 40
- args
 - skdiscovery::data_structure::table::generators←
::data_generator::DataGenerator, 106
- avg_radius
 - skdiscovery::utilities::planetary::map_util::Planet, 185
- aws_access_key
 - skdiscovery::utilities::cloud::amazon_control, 33
- aws_key_name
 - skdiscovery::utilities::cloud::amazon_control, 33
- aws_region
 - skdiscovery::utilities::cloud::amazon_control, 33
- aws_secret
 - skdiscovery::utilities::cloud::amazon_control, 33
- aws_security_group
 - skdiscovery::utilities::cloud::amazon_control, 33
- b
 - skdiscovery::utilities::planetary::map_util::Planet, 185
- background_density
 - skdiscovery::data_structure::table::generators←
::catalog_generator::CatalogGenerator, 95
- block_output
 - skdiscovery::visualization::vis_utils, 82
- c
 - skdiscovery::data_structure::series::filters::hyperbolictan←
::HTanFilter, 143
 - skdiscovery::data_structure::table::filters::hyperbolictan←
::HTanFilter, 139
- calc_DFT
 - skdiscovery::visualization::fourier_plot, 71
- calc_distance_map
 - skdiscovery::visualization::multi_dist, 76
- calc_imfs
 - skdiscovery::visualization::emd_plot, 64
- calc_imfs_sum
 - skdiscovery::visualization::emd_plot, 64
- calc_lin_interp
 - skdiscovery::visualization::linear_decomposition←
plot, 73
- calc_slopes
 - skdiscovery::utilities::planetary::map_util, 59
- calc_wp_deconstruct
 - skdiscovery::visualization::wavelets_plot, 84
- calc_wp_reconstruct
 - skdiscovery::visualization::wavelets_plot, 84
- cdf_dlf
 - skdiscovery::utilities::patterns::astro_tools, 41
- changeButtonState
 - skdiscovery::utilities::cloud::amazon_gui, 35
- check
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse←
Tunnel, 201
- checkValidValues
 - skdiscovery::utilities::cloud::amazon_gui, 35
- child_threads
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse←
Tunnel, 201
- clearAmazonList
 - skdiscovery::utilities::cloud::amazon_control, 29
- close
 - skdiscovery::utilities::cloud::amazon_control, 29
- closeDispyScheduler
 - skdiscovery::utilities::cloud::amazon_control, 29
- closed_pipe
 - skdiscovery::utilities::patterns::pbo_tools, 50
- coldict
 - skdiscovery::visualization::vis_utils, 83
- column
 - skdiscovery::data_structure::table::filters::normalize←
::NormalizeFilter, 170
- column_1

skdiscovery::data_structure::table::filters::combine↔
 _columns::CombineColumns, 99
 column_2
 skdiscovery::data_structure::table::filters::combine↔
 _columns::CombineColumns, 99
 column_data_name
 skdiscovery::data_structure::table::fusion::grace::↔
 GraceFusion, 134
 skdiscovery::data_structure::table::fusion::snow::↔
 SnowFusion, 206
 column_error_name
 skdiscovery::data_structure::table::fusion::grace::↔
 GraceFusion, 134
 column_list
 skdiscovery::data_structure::table::filters::antenna↔
 _offset::AntennaOffset, 89
 column_name
 skdiscovery::data_structure::table::filters::snow_↔
 remover::SnowRemover, 208
 column_names
 skdiscovery::data_structure::series::analysis↔
 ::correlate::Correlate, 103
 skdiscovery::data_structure::series::filters::dataremover↔
 ::DataRemover, 111
 skdiscovery::data_structure::series::filters::hyperbolictan↔
 ::HTanFilter, 143
 skdiscovery::data_structure::series::filters::offset_↔
 detrend::OffsetDetrend, 173
 skdiscovery::data_structure::table::accumulators↔
 ::plotter::Plotter, 190
 skdiscovery::data_structure::table::analysis::correlate↔
 ::Correlate, 101
 skdiscovery::data_structure::table::analysis::dbscan↔
 ::DBScan, 113
 skdiscovery::data_structure::table::analysis::gca::↔
 General_Component_Analysis, 124
 skdiscovery::data_structure::table::analysis::midas↔
 ::MIDAS, 162
 skdiscovery::data_structure::table::analysis::mogi::↔
 Mogi_Inversion, 168
 skdiscovery::data_structure::table::filters::dataremover↔
 ::DataRemover, 108
 skdiscovery::data_structure::table::filters::hyperbolictan↔
 ::HTanFilter, 139
 skdiscovery::data_structure::table::filters::kalman::↔
 KalmanFilter, 150
 skdiscovery::data_structure::table::filters::offset_↔
 detrend::OffsetDetrend, 176
 skdiscovery::data_structure::table::filters::weighted↔
 _average::WeightedAverage, 234
 columns
 skdiscovery::data_structure::table::analysis::outlier↔
 ::Outlier, 178
 skdiscovery::data_structure::table::filters::trend::↔
 TrendFilter, 230
 columns_together
 skdiscovery::data_structure::table::accumulators↔
 ::plotter::Plotter, 190
 comp_name
 skdiscovery::data_structure::generic::accumulators↔
 ::gpshplotter::GPSHPlotter, 130
 constant_open_pipe
 skdiscovery::utilities::patterns::pbo_tools, 51
 corr_type
 skdiscovery::data_structure::table::analysis::correlate↔
 ::Correlate, 101
 create_reverse_tunnel
 skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
 Tunnel, 200
 createTunnels
 skdiscovery::utilities::cloud::amazon_control, 29
 currentContainer
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainerAlternative, 219
 currentIndex
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainerIncrementalAdd, 223
 data_fetcher
 skdiscovery::data_structure::framework::discoverypipeline↔
 ::DiscoveryPipeline, 119
 data_structure/framework/base.py, 235
 data_structure/framework/config.py, 235
 data_structure/framework/discoverypipeline.py, 236
 data_structure/framework/stagecontainers.py, 236
 data_structure/generic/accumulators/data.py, 236
 data_structure/generic/accumulators/gpshplotter.py, 237
 data_structure/generic/accumulators/hcluster.py, 237
 data_structure/series/accumulators/plotter.py, 237
 data_structure/series/analysis/correlate.py, 238
 data_structure/series/analysis/gca.py, 238
 data_structure/series/analysis/mogi.py, 239
 data_structure/series/filters/dataremover.py, 240
 data_structure/series/filters/hyperbolictan.py, 240
 data_structure/series/filters/interpolate.py, 241
 data_structure/series/filters/kalman.py, 241
 data_structure/series/filters/lowpass.py, 242
 data_structure/series/filters/median.py, 243
 data_structure/series/filters/offset_detrend.py, 243
 data_structure/series/filters/trend.py, 244
 data_structure/table/accumulators/plotter.py, 237
 data_structure/table/analysis/correlate.py, 238
 data_structure/table/analysis/dbscan.py, 244
 data_structure/table/analysis/gca.py, 239
 data_structure/table/analysis/midas.py, 245
 data_structure/table/analysis/mogi.py, 239
 data_structure/table/analysis/outlier.py, 245
 data_structure/table/analysis/skew.py, 245

- data_structure/table/filters/antenna_offset.py, 245
- data_structure/table/filters/calibrate.py, 246
- data_structure/table/filters/combine_columns.py, 246
- data_structure/table/filters/dataremover.py, 240
- data_structure/table/filters/geolocation.py, 246
- data_structure/table/filters/hyperbolictan.py, 241
- data_structure/table/filters/interpolate.py, 241
- data_structure/table/filters/kalman.py, 242
- data_structure/table/filters/lowpass.py, 242
- data_structure/table/filters/median.py, 243
- data_structure/table/filters/normalize.py, 247
- data_structure/table/filters/offset_detrend.py, 243
- data_structure/table/filters/propagate_nans.py, 247
- data_structure/table/filters/resample.py, 247
- data_structure/table/filters/snow_remover.py, 247
- data_structure/table/filters/stabilization.py, 248
- data_structure/table/filters/table_filter.py, 248
- data_structure/table/filters/trend.py, 244
- data_structure/table/filters/weighted_average.py, 248
- data_structure/table/fusion/grace.py, 249
- data_structure/table/fusion/snow.py, 249
- data_structure/table/generators/catalog_generator.py, 249
- data_structure/table/generators/data_generator.py, 249
- datetimeToNumber
 - skdiscovery::utilities::patterns::pbo_tools, 51
- dec1
 - skdiscovery::data_structure::table::generators↔
::catalog_generator::CatalogGenerator, 95
- dec2
 - skdiscovery::data_structure::table::generators↔
::catalog_generator::CatalogGenerator, 95
- dir_sign
 - skdiscovery::data_structure::generic::accumulators↔
::gpsplotter::GPSHPlotter, 130
- dirEigenvectors
 - skdiscovery::utilities::patterns::pbo_tools, 52
- disable_list
 - skdiscovery::utilities::cloud::amazon_gui, 36
- dlf
 - skdiscovery::utilities::patterns::astro_tools, 41
- drawGUI
 - skdiscovery::utilities::cloud::amazon_gui, 35
- e_sq
 - skdiscovery::utilities::planetary::map_util::Planet, 185
- ec2_client
 - skdiscovery::utilities::cloud::amazon_control, 33
- ec2_res
 - skdiscovery::utilities::cloud::amazon_control, 34
- enable_output
 - skdiscovery::visualization::vis_utils, 82
- end
 - skdiscovery::data_structure::series::filters::dataremover↔
::DataRemover, 111
- skdiscovery::data_structure::series::filters::hyperbolictan↔
::HTanFilter, 143
- skdiscovery::data_structure::table::filters::dataremover↔
::DataRemover, 108
- skdiscovery::data_structure::table::filters::hyperbolictan↔
::HTanFilter, 139
- end_date
 - skdiscovery::data_structure::table::filters::resample↔
::Resample, 198
- end_time_limit
 - skdiscovery::data_structure::series::filters::hyperbolictan↔
::HTanFilter, 143
 - skdiscovery::data_structure::table::filters::hyperbolictan↔
::HTanFilter, 139
- equator_1deg
 - skdiscovery::utilities::planetary::map_util::Planet, 185
- error_column_names
 - skdiscovery::data_structure::table::accumulators↔
::plotter::Plotter, 190
 - skdiscovery::data_structure::table::filters::kalman::↔
KalmanFilter, 150
- errorbars
 - skdiscovery::data_structure::series::accumulators↔
::plotter::Plotter, 187
- errorE
 - skdiscovery::data_structure::generic::accumulators↔
::gpsplotter::GPSHPlotter, 130
- event
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
Tunnel, 201
- ewd_column_name
 - skdiscovery::data_structure::table::filters::calibrate↔
_grace::CalibrateGRACE, 92
- FOGM
 - skdiscovery::utilities::patterns::kalman_smoother, 46
- fillna
 - skdiscovery::data_structure::table::filters::kalman::↔
KalmanFilter, 151
- final_function
 - skdiscovery::data_structure::table::generators↔
::data_generator::DataGenerator, 106
- find_match
 - skdiscovery::visualization::spherical_voronoi, 77
- finite_sphere
 - skdiscovery::utilities::patterns::pbo_tools, 52
- FitFOGMPParameters
 - skdiscovery::utilities::patterns::kalman_smoother, 45
- FitPCA
 - skdiscovery::data_structure::series::analysis::mogi↔
::Mogi_Inversion, 164
 - skdiscovery::data_structure::table::analysis::mogi::↔
Mogi_Inversion, 167
- FitTimeSeries

- skdiscovery::data_structure::series::analysis::mogi↔
::Mogi_Inversion, 164
- skdiscovery::data_structure::table::analysis::mogi↔
Mogi_Inversion, 167
- frequency
 - skdiscovery::data_structure::table::filters::resample↔
::Resample, 198
- gaussian_walk
 - skdiscovery::utilities::patterns::random_walks, 55
- generateInfo
 - skdiscovery::utilities::cloud::amazon_control, 30
- get_lateralDist
 - skdiscovery::utilities::planetary::map_util::Planet, 183
- get_lateralDist_array
 - skdiscovery::utilities::planetary::map_util::Planet, 183
- get_medialDist
 - skdiscovery::utilities::planetary::map_util::Planet, 184
- getConfig
 - skdiscovery::data_structure::framework::config, 14
- getDispyPassword
 - skdiscovery::data_structure::framework::config, 14
- getHostName
 - skdiscovery::data_structure::framework::config, 14
- getMetadata
 - skdiscovery::data_structure::framework::base↔
PipelineItem, 180
 - skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 115
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainer, 213
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerAlternative, 217
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 221
 - skdiscovery::data_structure::table::analysis::midas↔
::MIDAS, 161
 - skdiscovery::data_structure::table::filters::calibrate↔
_grace::CalibrateGRACE, 91
 - skdiscovery::data_structure::table::filters::combine↔
_columns::CombineColumns, 98
 - skdiscovery::data_structure::table::filters::geolocation↔
::GeoLocationFilter, 126
 - skdiscovery::data_structure::table::filters::propagate↔
_nans::PropagateNaNs, 193
 - skdiscovery::data_structure::table::filters::resample↔
::Resample, 197
 - skdiscovery::data_structure::table::filters::stabilization↔
::StabilizationFilter, 210
 - skdiscovery::data_structure::table::filters::table↔
filter::TableFilter, 225
 - skdiscovery::data_structure::table::filters::weighted↔
_average::WeightedAverage, 232
 - skdiscovery::data_structure::table::fusion::grace↔
GraceFusion, 133
 - skdiscovery::data_structure::table::fusion::snow↔
SnowFusion, 205
- getMetadataHistory
 - skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 115
- getMetadataNestedGraph
 - skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 115
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainer, 213
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerAlternative, 217
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 221
- getMetadataNestedTypes
 - skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 116
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainer, 213
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerAlternative, 217
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 221
- getMetadataType
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainer, 213
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerAlternative, 217
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 221
- getObjects
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainer, 214
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerAlternative, 218
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 222
- getResults
 - skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 116
- getTrend
 - skdiscovery::utilities::patterns::trend_tools, 57
- getVoronoiCollection
 - skdiscovery::visualization::spherical_voronoi, 78
- gldas
 - skdiscovery::data_structure::table::fusion::grace↔
GraceFusion, 134
- global_coords
 - skdiscovery::utilities::planetary::map_util, 60
- goodConnection
 - skdiscovery::utilities::cloud::amazon_control, 30
- gps_to_pixel

- skdiscovery::utilities::planetary::map_util, 60
- group_column
 - skdiscovery::data_structure::table::filters::normalize↔
::NormalizeFilter, 170
- handler
 - skdiscovery::utilities::cloud::ssh_reverse, 37
- height
 - skdiscovery::data_structure::series::accumulators↔
::plotter::Plotter, 187
 - skdiscovery::data_structure::table::accumulators↔
::plotter::Plotter, 191
- index_scale
 - skdiscovery::visualization::vis_utils, 82
- init
 - skdiscovery::utilities::cloud::amazon_control, 30
 - skdiscovery::utilities::cloud::amazon_gui, 35
- initialized
 - skdiscovery::utilities::cloud::amazon_gui, 36
- initialized_disabled_list
 - skdiscovery::utilities::cloud::amazon_gui, 36
- interpNaN
 - skdiscovery::utilities::patterns::trend_tools, 57
- interpolate
 - skdiscovery::data_structure::series::filters::median↔
::MedianFilter, 156
 - skdiscovery::data_structure::table::filters::median::↔
MedianFilter, 159
- inv_cdf_dlf
 - skdiscovery::utilities::patterns::astro_tools, 42
- inverse_nfw_cumulative
 - skdiscovery::data_structure::table::generators↔
::catalog_generator::CatalogGenerator, 94
- IterativeGridSearch
 - skdiscovery::utilities::patterns::kalman_smoother, 47
- KF_tau
 - skdiscovery::data_structure::generic::accumulators↔
::gpsplotter::GPSHPlotter, 130
- KalmanFilter
 - skdiscovery::utilities::patterns::kalman_smoother, 47
- KalmanSmoother
 - skdiscovery::utilities::patterns::kalman_smoother, 49
- keep_in_bound
 - skdiscovery::utilities::patterns::random_walks, 56
- key_filename
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
Tunnel, 201
- key_value_list
 - skdiscovery::utilities::cloud::amazon_gui, 36
- kwargs
 - skdiscovery::data_structure::series::accumulators↔
::plotter::Plotter, 187
- skdiscovery::data_structure::table::accumulators↔
::plotter::Plotter, 191
- labels
 - skdiscovery::data_structure::series::analysis↔
::correlate::Correlate, 103
 - skdiscovery::data_structure::series::filters::dataremover↔
::DataRemover, 111
 - skdiscovery::data_structure::series::filters::hyperbolictan↔
::HTanFilter, 143
 - skdiscovery::data_structure::series::filters::offset_↔
detrend::OffsetDetrend, 173
 - skdiscovery::data_structure::table::filters::dataremover↔
::DataRemover, 109
 - skdiscovery::data_structure::table::filters::hyperbolictan↔
::HTanFilter, 139
 - skdiscovery::data_structure::table::filters::offset_↔
detrend::OffsetDetrend, 176
- length
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 223
 - skdiscovery::data_structure::table::generators↔
::data_generator::DataGenerator, 106
- If
 - skdiscovery::utilities::patterns::astro_tools, 43
- lin_trend
 - skdiscovery::visualization::linear_decomposition_↔
plot, 73
 - skdiscovery::visualization::vis_utils, 82
- list_AllStagecontainers
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 223
- list_currentContainers
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerIncrementalAdd, 223
- list_stagecontainers
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainerAlternative, 219
- local_match
 - skdiscovery::data_structure::table::analysis::correlate↔
::Correlate, 101
- medianFilter
 - skdiscovery::utilities::patterns::trend_tools, 58
- metadata
 - skdiscovery::data_structure::table::fusion::grace::↔
GraceFusion, 134
 - skdiscovery::data_structure::table::fusion::snow::↔
SnowFusion, 206
- min_diff
 - skdiscovery::data_structure::table::filters::antenna↔
_offset::AntennaOffset, 89
- min_periods
 - skdiscovery::data_structure::table::filters::median::↔
MedianFilter, 159

mod_data
 skdiscovery::visualization::vis_utils, 83
 mogi
 skdiscovery::utilities::patterns::pbo_tools, 53
 mogi_name
 skdiscovery::data_structure::generic::accumulators↔
 ::gpsplotter::GPSHPlotter, 130
 MogiVectors
 skdiscovery::data_structure::series::analysis::mogi,
 18
 skdiscovery::data_structure::table::analysis::mogi, 22
 move_point
 skdiscovery::utilities::patterns::astro_tools, 43
 multiCaPlot
 skdiscovery::visualization::multi_ca_plot, 75

 n_components
 skdiscovery::data_structure::table::analysis::gca::↔
 General_Component_Analysis, 124
 name_prefix
 skdiscovery::data_structure::table::analysis::outlier↔
 ::Outlier, 178
 nan_column
 skdiscovery::data_structure::table::filters::propagate↔
 _nans::PropagateNaNs, 194
 new_column_name
 skdiscovery::data_structure::table::filters::combine↔
 _columns::CombineColumns, 99
 nfw
 skdiscovery::utilities::patterns::astro_tools, 44
 nfw_cumulative
 skdiscovery::data_structure::table::generators↔
 ::catalog_generator::CatalogGenerator, 94
 num_columns
 skdiscovery::data_structure::series::accumulators↔
 ::plotter::Plotter, 187
 skdiscovery::data_structure::table::accumulators↔
 ::plotter::Plotter, 191

 obj_content
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainer, 215
 obj_name
 skdiscovery::data_structure::generic::accumulators↔
 ::hcluster::HCluster, 136
 offset
 skdiscovery::data_structure::generic::accumulators↔
 ::gpsplotter::GPSHPlotter, 130
 skdiscovery::data_structure::series::filters::hyperbolictan↔
 ::HTanFilter, 144
 skdiscovery::data_structure::table::filters::hyperbolictan↔
 ::HTanFilter, 140
 output
 skdiscovery::data_structure::table::generators↔
 ::catalog_generator::CatalogGenerator, 95
 skdiscovery::data_structure::table::generators↔
 ::data_generator::DataGenerator, 106

 pca_comp
 skdiscovery::data_structure::generic::accumulators↔
 ::gpsplotter::GPSHPlotter, 130
 pca_dir
 skdiscovery::data_structure::generic::accumulators↔
 ::gpsplotter::GPSHPlotter, 131
 pca_name
 skdiscovery::data_structure::table::analysis::mogi::↔
 Mogi_Inversion, 168
 pem_file
 skdiscovery::utilities::cloud::amazon_control, 34
 perturb
 skdiscovery::data_structure::framework::discoverypipeline↔
 ::DiscoveryPipeline, 116
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainer, 214
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainerAlternative, 218
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainerIncrementalAdd, 222
 perturbData
 skdiscovery::data_structure::framework::discoverypipeline↔
 ::DiscoveryPipeline, 117
 perturbParams
 skdiscovery::data_structure::framework::base::↔
 PipelineItem, 181
 skdiscovery::data_structure::table::analysis::midas↔
 ::MIDAS, 161
 skdiscovery::data_structure::table::filters::calibrate↔
 _grace::CalibrateGRACE, 91
 skdiscovery::data_structure::table::filters::combine↔
 _columns::CombineColumns, 98
 skdiscovery::data_structure::table::filters::geolocation↔
 ::GeoLocationFilter, 126
 skdiscovery::data_structure::table::filters::propagate↔
 _nans::PropagateNaNs, 193
 skdiscovery::data_structure::table::filters::resample↔
 ::Resample, 197
 skdiscovery::data_structure::table::filters::stabilization↔
 ::StabilizationFilter, 210
 skdiscovery::data_structure::table::filters::table↔
 filter::TableFilter, 225
 skdiscovery::data_structure::table::filters::weighted↔
 _average::WeightedAverage, 232
 skdiscovery::data_structure::table::fusion::grace::↔
 GraceFusion, 133
 skdiscovery::data_structure::table::fusion::snow::↔
 SnowFusion, 205
 perturbmethod
 skdiscovery::data_structure::framework::stagecontainers↔
 ::StageContainer, 215

plot_DFT
 skdiscovery::visualization::fourier_plot, 71
 plot_imfs
 skdiscovery::visualization::emd_plot, 65
 plot_imfs_noise
 skdiscovery::visualization::emd_plot, 65
 plot_imfs_split
 skdiscovery::visualization::emd_plot, 66
 plot_imfs_split_comp
 skdiscovery::visualization::emd_plot, 66
 plot_lin_interp
 skdiscovery::visualization::linear_decomposition_←
 plot, 74
 plot_lin_slope
 skdiscovery::visualization::linear_decomposition_←
 plot, 74
 plot_lin_trend
 skdiscovery::visualization::linear_decomposition_←
 plot, 75
 plot_spiral
 skdiscovery::visualization::spiral_plot, 80
 plot_wp_deconstruct
 skdiscovery::visualization::wavelets_plot, 84
 plot_wp_reconstruct
 skdiscovery::visualization::wavelets_plot, 85
 plot_wp_showall
 skdiscovery::visualization::wavelets_plot, 85
 plotPipelineInstance
 skdiscovery::data_structure::framework::discoverypipeline←
 ::DiscoveryPipeline, 117
 plotPipelineStructure
 skdiscovery::data_structure::framework::discoverypipeline←
 ::DiscoveryPipeline, 117
 popen
 skdiscovery::utilities::cloud::amazon_control, 34
 print_verbose
 skdiscovery::utilities::cloud::ssh_reverse, 37
 process
 skdiscovery::data_structure::framework::base::←
 PipelineItem, 181
 skdiscovery::data_structure::generic::accumulators←
 ::data::DataAccumulator, 104
 skdiscovery::data_structure::generic::accumulators←
 ::gpsplotter::GPSHPlotter, 129
 skdiscovery::data_structure::generic::accumulators←
 ::hcluster::HCluster, 136
 skdiscovery::data_structure::series::accumulators←
 ::plotter::Plotter, 187
 skdiscovery::data_structure::series::analysis←
 ::correlate::Correlate, 103
 skdiscovery::data_structure::series::analysis::gca::←
 General_Component_Analysis, 121
 skdiscovery::data_structure::series::analysis::mogi←
 ::Mogi_Inversion, 165
 skdiscovery::data_structure::series::filters::dataremover←
 ::DataRemover, 110
 skdiscovery::data_structure::series::filters::hyperbolictan←
 ::HTanFilter, 142
 skdiscovery::data_structure::series::filters::interpolate←
 ::InterpolateFilter, 146
 skdiscovery::data_structure::series::filters::kalman←
 ::KalmanFilter, 148
 skdiscovery::data_structure::series::filters::lowpass←
 ::LowPassFilter, 152
 skdiscovery::data_structure::series::filters::median←
 ::MedianFilter, 156
 skdiscovery::data_structure::series::filters::offset←
 detrend::OffsetDetrend, 173
 skdiscovery::data_structure::series::filters::trend::←
 TrendFilter, 228
 skdiscovery::data_structure::table::accumulators←
 ::plotter::Plotter, 189
 skdiscovery::data_structure::table::analysis::correlate←
 ::Correlate, 101
 skdiscovery::data_structure::table::analysis::dbscan←
 ::DBScan, 112
 skdiscovery::data_structure::table::analysis::gca::←
 General_Component_Analysis, 123
 skdiscovery::data_structure::table::analysis::midas←
 ::MIDAS, 161
 skdiscovery::data_structure::table::analysis::mogi::←
 Mogi_Inversion, 168
 skdiscovery::data_structure::table::analysis::outlier←
 ::Outlier, 178
 skdiscovery::data_structure::table::analysis::skew::←
 Skew, 203
 skdiscovery::data_structure::table::filters::antenna←
 _offset::AntennaOffset, 88
 skdiscovery::data_structure::table::filters::calibrate←
 _grace::CalibrateGRACE, 91
 skdiscovery::data_structure::table::filters::combine←
 _columns::CombineColumns, 98
 skdiscovery::data_structure::table::filters::dataremover←
 ::DataRemover, 108
 skdiscovery::data_structure::table::filters::geolocation←
 ::GeoLocationFilter, 126
 skdiscovery::data_structure::table::filters::hyperbolictan←
 ::HTanFilter, 138
 skdiscovery::data_structure::table::filters::interpolate←
 ::InterpolateFilter, 145
 skdiscovery::data_structure::table::filters::kalman::←
 KalmanFilter, 150
 skdiscovery::data_structure::table::filters::lowpass←
 ::LowPassFilter, 154
 skdiscovery::data_structure::table::filters::median::←
 MedianFilter, 158
 skdiscovery::data_structure::table::filters::normalize←
 ::NormalizeFilter, 170

- skdiscovery::data_structure::table::filters::offset_↔
detrend::OffsetDetrend, 176
- skdiscovery::data_structure::table::filters::propagate_↔
_nans::PropagateNaNs, 194
- skdiscovery::data_structure::table::filters::resample_↔
::Resample, 197
- skdiscovery::data_structure::table::filters::snow_↔
remover::SnowRemover, 208
- skdiscovery::data_structure::table::filters::stabilization_↔
::StabilizationFilter, 210
- skdiscovery::data_structure::table::filters::table_↔
filter::TableFilter, 225
- skdiscovery::data_structure::table::filters::trend_↔
TrendFilter, 229
- skdiscovery::data_structure::table::filters::weighted_↔
_average::WeightedAverage, 232
- skdiscovery::data_structure::table::fusion::grace_↔
GraceFusion, 133
- skdiscovery::data_structure::table::fusion::snow_↔
SnowFusion, 205
- propagate_uncertainties
skdiscovery::data_structure::table::filters::weighted_↔
_average::WeightedAverage, 234
- RA_results
skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 119
- ra1
skdiscovery::data_structure::table::generators_↔
::catalog_generator::CatalogGenerator, 95
- ra2
skdiscovery::data_structure::table::generators_↔
::catalog_generator::CatalogGenerator, 95
- regular_period
skdiscovery::data_structure::table::filters::median_↔
MedianFilter, 159
- remote_host
skdiscovery::utilities::cloud::ssh_reverse::Reverse_↔
Tunnel, 201
- remote_port
skdiscovery::utilities::cloud::ssh_reverse::Reverse_↔
Tunnel, 201
- reset
skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 117
- skdiscovery::data_structure::framework::stagecontainers_↔
::StageContainer, 214
- skdiscovery::data_structure::framework::stagecontainers_↔
::StageContainerAlternative, 218
- skdiscovery::data_structure::framework::stagecontainers_↔
::StageContainerIncrementalAdd, 222
- skdiscovery::utilities::cloud::amazon_control, 31
- resetInstances
skdiscovery::utilities::cloud::amazon_control, 31
- resetParams
skdiscovery::data_structure::framework::base_↔
PipelineItem, 181
- skdiscovery::data_structure::table::analysis::midas_↔
::MIDAS, 162
- skdiscovery::data_structure::table::filters::calibrate_↔
_grace::CalibrateGRACE, 91
- skdiscovery::data_structure::table::filters::combine_↔
_columns::CombineColumns, 99
- skdiscovery::data_structure::table::filters::geolocation_↔
::GeoLocationFilter, 127
- skdiscovery::data_structure::table::filters::propagate_↔
_nans::PropagateNaNs, 194
- skdiscovery::data_structure::table::filters::resample_↔
::Resample, 197
- skdiscovery::data_structure::table::filters::stabilization_↔
::StabilizationFilter, 211
- skdiscovery::data_structure::table::filters::table_↔
filter::TableFilter, 226
- skdiscovery::data_structure::table::filters::weighted_↔
_average::WeightedAverage, 234
- skdiscovery::data_structure::table::fusion::grace_↔
GraceFusion, 134
- skdiscovery::data_structure::table::fusion::snow_↔
SnowFusion, 206
- resetMethod
skdiscovery::data_structure::framework::stagecontainers_↔
::StageContainer, 215
- resultIter
skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 118
- results
skdiscovery::data_structure::series::analysis::gca_↔
General_Component_Analysis, 121
- skdiscovery::data_structure::table::analysis::gca_↔
General_Component_Analysis, 124
- reverse_forward_tunnel
skdiscovery::utilities::cloud::ssh_reverse, 38
- rising_open_pipe
skdiscovery::utilities::patterns::pbo_tools, 54
- round_dates
skdiscovery::data_structure::table::filters::calibrate_↔
_grace::CalibrateGRACE, 92
- skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, 118
- skdiscovery::data_structure::framework::stagecontainers_↔
::StageContainer, 214
- skdiscovery::data_structure::framework::stagecontainers_↔
::StageContainerAlternative, 218
- skdiscovery::data_structure::framework::stagecontainers_↔
::StageContainerIncrementalAdd, 222
- run_plotDFT
skdiscovery::visualization::fourier_plot, 72

- run_plotImfs
 - skdiscovery::visualization::emd_plot, 67
- run_plotImfsNoise
 - skdiscovery::visualization::emd_plot, 68
- run_plotImfsSplit
 - skdiscovery::visualization::emd_plot, 68
- run_plotImfsSplitComp
 - skdiscovery::visualization::emd_plot, 69
- run_plotImfsSplitNoise
 - skdiscovery::visualization::emd_plot, 70
- run_plotWPDecon
 - skdiscovery::visualization::wavelets_plot, 85
- run_plotWPRecon
 - skdiscovery::visualization::wavelets_plot, 85
- run_plotWPShowall
 - skdiscovery::visualization::wavelets_plot, 86
- run_spiral
 - skdiscovery::visualization::spiral_plot, 81
- run_spiralInteractive
 - skdiscovery::visualization::spiral_plot, 81
- runmethod
 - skdiscovery::data_structure::framework::stagecontainers↔
::StageContainer, 215
- sanitize_latlon
 - skdiscovery::utilities::planetary::map_util, 61
- scaleFactor
 - skdiscovery::data_structure::generic::accumulators↔
::gpsplotter::GPSHPlotter, 131
- scheduler
 - skdiscovery::utilities::cloud::amazon_control, 34
- seed
 - skdiscovery::data_structure::table::generators↔
::data_generator::DataGenerator, 106
- server_address
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
Tunnel, 201
- server_port
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
Tunnel, 202
- setNumInstances
 - skdiscovery::utilities::cloud::amazon_control, 31
- sill
 - skdiscovery::utilities::patterns::pbo_tools, 54
- sinuFits
 - skdiscovery::utilities::patterns::trend_tools, 58
- skdiscovery, 13
- skdiscovery.data_structure, 13
- skdiscovery.data_structure.framework, 13
- skdiscovery.data_structure.framework.base, 14
- skdiscovery.data_structure.framework.config, 14
- skdiscovery.data_structure.framework.DiscoveryPipeline, 113
- skdiscovery.data_structure.framework.discoverypipeline, 15
- skdiscovery.data_structure.framework.PipelineItem, 179
- skdiscovery.data_structure.framework.StageContainer, 211
- skdiscovery.data_structure.framework.StageContainer↔
Alternative, 215
- skdiscovery.data_structure.framework.StageContainer↔
IncrementalAdd, 219
- skdiscovery.data_structure.framework.stagecontainers, 15
- skdiscovery.data_structure.generic, 16
- skdiscovery.data_structure.generic.accumulators, 16
- skdiscovery.data_structure.generic.accumulators.data, 16
- skdiscovery.data_structure.generic.accumulators.Data↔
Accumulator, 104
- skdiscovery.data_structure.generic.accumulators.GPSH↔
Plotter, 128
- skdiscovery.data_structure.generic.accumulators.↔
gpsplotter, 16
- skdiscovery.data_structure.generic.accumulators.H↔
Cluster, 135
- skdiscovery.data_structure.generic.accumulators.hcluster, 16
- skdiscovery.data_structure.series, 16
- skdiscovery.data_structure.series.accumulators, 17
- skdiscovery.data_structure.series.accumulators.Plotter, 185
- skdiscovery.data_structure.series.accumulators.plotter, 17
- skdiscovery.data_structure.series.analysis, 17
- skdiscovery.data_structure.series.analysis.Correlate, 102
- skdiscovery.data_structure.series.analysis.correlate, 17
- skdiscovery.data_structure.series.analysis.gca, 17
- skdiscovery.data_structure.series.analysis.General_↔
Component_Analysis, 119
- skdiscovery.data_structure.series.analysis.mogi, 17
- skdiscovery.data_structure.series.analysis.Mogi_↔
Inversion, 163
- skdiscovery.data_structure.series.filters, 18
- skdiscovery.data_structure.series.filters.DataRemover, 109
- skdiscovery.data_structure.series.filters.dataremover, 19
- skdiscovery.data_structure.series.filters.HTanFilter, 141
- skdiscovery.data_structure.series.filters.hyperbolictan, 19
- skdiscovery.data_structure.series.filters.interpolate, 19
- skdiscovery.data_structure.series.filters.InterpolateFilter, 146
- skdiscovery.data_structure.series.filters.kalman, 19
- skdiscovery.data_structure.series.filters.KalmanFilter, 147
- skdiscovery.data_structure.series.filters.LowPassFilter, 151
- skdiscovery.data_structure.series.filters.lowpass, 19
- skdiscovery.data_structure.series.filters.median, 19
- skdiscovery.data_structure.series.filters.MedianFilter, 155
- skdiscovery.data_structure.series.filters.offset_detrend, 20

- skdiscovery.data_structure.series.filters.OffsetDetrend, 171
- skdiscovery.data_structure.series.filters.trend, 20
- skdiscovery.data_structure.series.filters.TrendFilter, 227
- skdiscovery.data_structure.table, 20
- skdiscovery.data_structure.table.accumulators, 20
- skdiscovery.data_structure.table.accumulators.Plotter, 188
- skdiscovery.data_structure.table.accumulators.plotter, 20
- skdiscovery.data_structure.table.analysis, 21
- skdiscovery.data_structure.table.analysis.Correlate, 100
- skdiscovery.data_structure.table.analysis.correlate, 21
- skdiscovery.data_structure.table.analysis.DBScan, 111
- skdiscovery.data_structure.table.analysis.dbscan, 21
- skdiscovery.data_structure.table.analysis.gca, 21
- skdiscovery.data_structure.table.analysis.General↔Component_Analysis, 122
- skdiscovery.data_structure.table.analysis.MIDAS, 159
- skdiscovery.data_structure.table.analysis.midas, 21
- skdiscovery.data_structure.table.analysis.mogi, 22
- skdiscovery.data_structure.table.analysis.Mogi_Inversion, 166
- skdiscovery.data_structure.table.analysis.Outlier, 177
- skdiscovery.data_structure.table.analysis.outlier, 22
- skdiscovery.data_structure.table.analysis.Skew, 202
- skdiscovery.data_structure.table.analysis.skew, 23
- skdiscovery.data_structure.table.filters, 23
- skdiscovery.data_structure.table.filters.antenna_offset, 23
- skdiscovery.data_structure.table.filters.AntennaOffset, 87
- skdiscovery.data_structure.table.filters.calibrate_grace, 23
- skdiscovery.data_structure.table.filters.CalibrateGRACE, 89
- skdiscovery.data_structure.table.filters.combine_columns, 24
- skdiscovery.data_structure.table.filters.CombineColumns, 96
- skdiscovery.data_structure.table.filters.DataRemover, 107
- skdiscovery.data_structure.table.filters.dataremover, 24
- skdiscovery.data_structure.table.filters.GeoLocationFilter, 125
- skdiscovery.data_structure.table.filters.geolocation, 24
- skdiscovery.data_structure.table.filters.HTanFilter, 137
- skdiscovery.data_structure.table.filters.hyperbolictan, 24
- skdiscovery.data_structure.table.filters.interpolate, 24
- skdiscovery.data_structure.table.filters.InterpolateFilter, 145
- skdiscovery.data_structure.table.filters.kalman, 24
- skdiscovery.data_structure.table.filters.KalmanFilter, 149
- skdiscovery.data_structure.table.filters.LowPassFilter, 153
- skdiscovery.data_structure.table.filters.lowpass, 25
- skdiscovery.data_structure.table.filters.median, 25
- skdiscovery.data_structure.table.filters.MedianFilter, 157
- skdiscovery.data_structure.table.filters.normalize, 25
- skdiscovery.data_structure.table.filters.NormalizeFilter, 169
- skdiscovery.data_structure.table.filters.offset_detrend, 25
- skdiscovery.data_structure.table.filters.OffsetDetrend, 174
- skdiscovery.data_structure.table.filters.propagate_nans, 25
- skdiscovery.data_structure.table.filters.PropagateNaNs, 192
- skdiscovery.data_structure.table.filters.Resample, 195
- skdiscovery.data_structure.table.filters.resample, 25
- skdiscovery.data_structure.table.filters.snow_remover, 26
- skdiscovery.data_structure.table.filters.SnowRemover, 207
- skdiscovery.data_structure.table.filters.stabilization, 26
- skdiscovery.data_structure.table.filters.StabilizationFilter, 209
- skdiscovery.data_structure.table.filters.table_filter, 26
- skdiscovery.data_structure.table.filters.TableFilter, 224
- skdiscovery.data_structure.table.filters.trend, 26
- skdiscovery.data_structure.table.filters.TrendFilter, 228
- skdiscovery.data_structure.table.filters.weighted_average, 26
- skdiscovery.data_structure.table.filters.WeightedAverage, 230
- skdiscovery.data_structure.table.fusion, 26
- skdiscovery.data_structure.table.fusion.grace, 27
- skdiscovery.data_structure.table.fusion.GraceFusion, 131
- skdiscovery.data_structure.table.fusion.snow, 27
- skdiscovery.data_structure.table.fusion.SnowFusion, 203
- skdiscovery.data_structure.table.generators, 27
- skdiscovery.data_structure.table.generators.catalog↔generator, 27
- skdiscovery.data_structure.table.generators.Catalog↔Generator, 93
- skdiscovery.data_structure.table.generators.data↔generator, 27
- skdiscovery.data_structure.table.generators.Data↔Generator, 105
- skdiscovery.utilities, 27
- skdiscovery.utilities.cloud, 28
- skdiscovery.utilities.cloud.amazon_control, 28
- skdiscovery.utilities.cloud.amazon_gui, 34
- skdiscovery.utilities.cloud.ssh_reverse, 37
- skdiscovery.utilities.cloud.ssh_reverse.ReverseTunnel, 199
- skdiscovery.utilities.patterns, 38
- skdiscovery.utilities.patterns.astro_tools, 39
- skdiscovery.utilities.patterns.kalman_smoother, 45
- skdiscovery.utilities.patterns.pbo_tools, 50
- skdiscovery.utilities.patterns.random_walks, 55
- skdiscovery.utilities.patterns.trend_tools, 57
- skdiscovery.utilities.planetary, 59
- skdiscovery.utilities.planetary.map_util, 59
- skdiscovery.utilities.planetary.map_util.Planet, 182

- skdiscovery.visualization, 63
- skdiscovery.visualization.emd_plot, 63
- skdiscovery.visualization.fourier_plot, 71
- skdiscovery.visualization.linear_decomposition_plot, 72
- skdiscovery.visualization.multi_ca_plot, 75
- skdiscovery.visualization.multi_dist, 76
- skdiscovery.visualization.spherical_voronoi, 77
- skdiscovery.visualization.spiral_plot, 80
- skdiscovery.visualization.vis_utils, 82
- skdiscovery.visualization.wavelets_plot, 84
- skdiscovery::data_structure::framework::base::Pipeline↔
 - Item
 - __init__, 180
 - __str__, 180
 - ap_paramList, 181
 - ap_paramNames, 182
 - getMetadata, 180
 - perturbParams, 181
 - process, 181
 - resetParams, 181
 - str_description, 182
- skdiscovery::data_structure::framework::config
 - getConfig, 14
 - getDispyPassword, 14
 - getHostName, 14
 - writeConfigValue, 15
- skdiscovery::data_structure::framework::discoverypipeline↔
 - ::DiscoveryPipeline
 - __init__, 114
 - __str__, 115
 - data_fetcher, 119
 - getMetadata, 115
 - getMetadataHistory, 115
 - getMetadataNestedGraph, 115
 - getMetadataNestedTypes, 116
 - getResults, 116
 - perturb, 116
 - perturbData, 117
 - plotPipelineInstance, 117
 - plotPipelineStructure, 117
 - RA_results, 119
 - reset, 117
 - resultIter, 118
 - run, 118
 - stage_containers, 119
 - stageConfigurationHistory, 119
- skdiscovery::data_structure::framework::stagecontainers↔
 - ::StageContainer
 - __init__, 212
 - getMetadata, 213
 - getMetadataNestedGraph, 213
 - getMetadataNestedTypes, 213
 - getMetadataType, 213
 - getObjects, 214
 - obj_content, 215
 - perturb, 214
 - perturbmethod, 215
 - reset, 214
 - resetmethod, 215
 - run, 214
 - runmethod, 215
- skdiscovery::data_structure::framework::stagecontainers↔
 - ::StageContainerAlternative
 - __init__, 216
 - currentContainer, 219
 - getMetadata, 217
 - getMetadataNestedGraph, 217
 - getMetadataNestedTypes, 217
 - getMetadataType, 217
 - getObjects, 218
 - list_stagecontainers, 219
 - perturb, 218
 - reset, 218
 - run, 218
- skdiscovery::data_structure::framework::stagecontainers↔
 - ::StageContainerIncrementalAdd
 - __init__, 220
 - currentindex, 223
 - getMetadata, 221
 - getMetadataNestedGraph, 221
 - getMetadataNestedTypes, 221
 - getMetadataType, 221
 - getObjects, 222
 - length, 223
 - list_AllStagecontainers, 223
 - list_currentContainers, 223
 - perturb, 222
 - reset, 222
 - run, 222
- skdiscovery::data_structure::generic::accumulators↔
 - ::data::DataAccumulator
 - process, 104
- skdiscovery::data_structure::generic::accumulators↔
 - ::gpsplotter::GPSHPlotter
 - __init__, 128
 - comp_name, 130
 - dir_sign, 130
 - errorE, 130
 - KF_tau, 130
 - mogi_name, 130
 - offset, 130
 - pca_comp, 130
 - pca_dir, 131
 - process, 129
 - scaleFactor, 131
- skdiscovery::data_structure::generic::accumulators↔
 - ::hcluster::HCluster
 - __init__, 136

- obj_name, 136
- process, 136
- skdiscovery::data_structure::series::accumulators↔
 - ::plotter::Plotter
 - __init__, 186
 - errorbars, 187
 - height, 187
 - kwargs, 187
 - num_columns, 187
 - process, 187
 - width, 187
- skdiscovery::data_structure::series::analysis::correlate::↔
 - Correlate
 - __init__, 102
 - column_names, 103
 - labels, 103
 - process, 103
- skdiscovery::data_structure::series::analysis::gca::↔
 - General_Component_Analysis
 - __init__, 120
 - ap_paramList, 121
 - ap_paramNames, 121
 - process, 121
 - results, 121
 - str_description, 121
- skdiscovery::data_structure::series::analysis::mogi
 - MogiVectors, 18
- skdiscovery::data_structure::series::analysis::mogi::↔
 - Mogi_Inversion
 - __init__, 163
 - ap_paramNames, 165
 - FitPCA, 164
 - FitTimeSeries, 164
 - process, 165
- skdiscovery::data_structure::series::filters::dataremover↔
 - ::DataRemover
 - __init__, 110
 - column_names, 111
 - end, 111
 - labels, 111
 - process, 110
 - start, 111
- skdiscovery::data_structure::series::filters::hyperbolictan↔
 - ::HTanFilter
 - __init__, 141
 - a, 143
 - c, 143
 - column_names, 143
 - end, 143
 - end_time_limit, 143
 - labels, 143
 - offset, 144
 - process, 142
 - slope, 144
 - start, 144
 - start_time_limit, 144
 - t0, 144
- skdiscovery::data_structure::series::filters::interpolate::↔
 - InterpolateFilter
 - process, 146
- skdiscovery::data_structure::series::filters::kalman::↔
 - KalmanFilter
 - __init__, 147
 - ap_paramNames, 148
 - process, 148
 - uncertainty_clip, 148
- skdiscovery::data_structure::series::filters::lowpass::↔
 - LowPassFilter
 - __init__, 152
 - ap_paramNames, 153
 - process, 152
- skdiscovery::data_structure::series::filters::median::↔
 - MedianFilter
 - __init__, 155
 - ap_paramNames, 156
 - interpolate, 156
 - process, 156
 - subtract, 156
- skdiscovery::data_structure::series::filters::offset↔
 - detrend::OffsetDetrend
 - __init__, 171
 - ap_paramNames, 173
 - column_names, 173
 - labels, 173
 - process, 173
 - time_interval, 174
 - time_point, 174
- skdiscovery::data_structure::series::filters::trend::Trend↔
 - Filter
 - __init__, 227
 - ap_paramNames, 228
 - process, 228
- skdiscovery::data_structure::table::accumulators::plotter↔
 - ::Plotter
 - __init__, 189
 - annotate_column, 190
 - annotate_data, 190
 - column_names, 190
 - columns_together, 190
 - error_column_names, 190
 - height, 191
 - kwargs, 191
 - num_columns, 191
 - process, 189
 - width, 191
 - xlim, 191
 - ylim, 191

- skdiscovery::data_structure::table::analysis::correlate::↵
 - Correlate
 - __init__, 100
 - column_names, 101
 - corr_type, 101
 - local_match, 101
 - process, 101
- skdiscovery::data_structure::table::analysis::dbscan::D↵
 - BScan
 - __init__, 112
 - column_names, 113
 - process, 112
- skdiscovery::data_structure::table::analysis::gca::↵
 - General_Component_Analysis
 - __init__, 123
 - ap_paramList, 124
 - ap_paramNames, 124
 - column_names, 124
 - n_components, 124
 - process, 123
 - results, 124
 - str_description, 124
- skdiscovery::data_structure::table::analysis::midas::MID↵
 - AS
 - __init__, 160
 - __str__, 161
 - ap_paramList, 162
 - ap_paramNames, 162
 - column_names, 162
 - getMetadata, 161
 - perturbParams, 161
 - process, 161
 - resetParams, 162
 - str_description, 162
- skdiscovery::data_structure::table::analysis::mogi
 - MogiVectors, 22
- skdiscovery::data_structure::table::analysis::mogi::Mogi↵
 - _Inversion
 - __init__, 166
 - ap_paramNames, 168
 - column_names, 168
 - FitPCA, 167
 - FitTimeSeries, 167
 - pca_name, 168
 - process, 168
- skdiscovery::data_structure::table::analysis::outlier::↵
 - Outlier
 - __init__, 177
 - columns, 178
 - name_prefix, 178
 - process, 178
- skdiscovery::data_structure::table::analysis::skew::Skew
 - process, 203
- skdiscovery::data_structure::table::filters::antenna_↵
 - offset::AntennaOffset
 - __init__, 88
 - antenna_data, 88
 - column_list, 89
 - min_diff, 89
 - process, 88
- skdiscovery::data_structure::table::filters::calibrate_↵
 - grace::CalibrateGRACE
 - __init__, 90
 - __str__, 90
 - ap_paramList, 92
 - ap_paramNames, 92
 - ewd_column_name, 92
 - getMetadata, 91
 - perturbParams, 91
 - process, 91
 - resetParams, 91
 - round_dates, 92
 - str_description, 92
- skdiscovery::data_structure::table::filters::combine_↵
 - columns::CombineColumns
 - __init__, 97
 - __str__, 97
 - ap_paramList, 99
 - ap_paramNames, 99
 - column_1, 99
 - column_2, 99
 - getMetadata, 98
 - new_column_name, 99
 - perturbParams, 98
 - process, 98
 - resetParams, 99
 - str_description, 99
- skdiscovery::data_structure::table::filters::dataremove::↵
 - DataRemover
 - __init__, 107
 - column_names, 108
 - end, 108
 - labels, 109
 - process, 108
 - start, 109
- skdiscovery::data_structure::table::filters::geolocation::↵
 - GeoLocationFilter
 - __init__, 125
 - __str__, 126
 - ap_paramList, 127
 - ap_paramNames, 127
 - getMetadata, 126
 - perturbParams, 126
 - process, 126
 - resetParams, 127
 - str_description, 127

- skdiscovery::data_structure::table::filters::hyperbolictan↔
 - ::HTanFilter
 - __init__, 137
 - a, 139
 - c, 139
 - column_names, 139
 - end, 139
 - end_time_limit, 139
 - labels, 139
 - offset, 140
 - process, 138
 - slope, 140
 - start, 140
 - start_time_limit, 140
 - t0, 140
- skdiscovery::data_structure::table::filters::interpolate::↔
 - InterpolateFilter
 - process, 145
- skdiscovery::data_structure::table::filters::kalman::↔
 - KalmanFilter
 - __init__, 149
 - ap_paramNames, 150
 - column_names, 150
 - error_column_names, 150
 - fillna, 151
 - process, 150
 - uncertainty_clip, 151
- skdiscovery::data_structure::table::filters::lowpass::Low↔
 - PassFilter
 - __init__, 153
 - ap_paramNames, 154
 - process, 154
- skdiscovery::data_structure::table::filters::median::↔
 - MedianFilter
 - __init__, 157
 - ap_paramNames, 158
 - interpolate, 159
 - min_periods, 159
 - process, 158
 - regular_period, 159
 - subtract, 159
- skdiscovery::data_structure::table::filters::normalize::↔
 - NormalizeFilter
 - __init__, 169
 - column, 170
 - group_column, 170
 - process, 170
- skdiscovery::data_structure::table::filters::offset_detrend↔
 - ::OffsetDetrend
 - __init__, 175
 - ap_paramNames, 176
 - column_names, 176
 - labels, 176
 - process, 176
 - time_interval, 176
 - time_point, 176
- skdiscovery::data_structure::table::filters::propagate↔
 - nans::PropagateNaNs
 - __init__, 192
 - __str__, 193
 - ap_paramList, 194
 - ap_paramNames, 194
 - getMetadata, 193
 - nan_column, 194
 - perturbParams, 193
 - process, 194
 - resetParams, 194
 - str_description, 195
 - target_columns, 195
- skdiscovery::data_structure::table::filters::resample::↔
 - Resample
 - __init__, 196
 - __str__, 196
 - ap_paramList, 198
 - ap_paramNames, 198
 - end_date, 198
 - frequency, 198
 - getMetadata, 197
 - perturbParams, 197
 - process, 197
 - resetParams, 197
 - start_date, 198
 - str_description, 198
- skdiscovery::data_structure::table::filters::snow_remove↔
 - ::SnowRemover
 - __init__, 207
 - column_name, 208
 - process, 208
 - snow_column, 208
- skdiscovery::data_structure::table::filters::stabilization::↔
 - StabilizationFilter
 - __str__, 209
 - ap_paramList, 211
 - ap_paramNames, 211
 - getMetadata, 210
 - perturbParams, 210
 - process, 210
 - resetParams, 211
 - str_description, 211
- skdiscovery::data_structure::table::filters::table_filter::↔
 - TableFilter
 - __init__, 224
 - __str__, 225
 - ap_paramList, 226
 - ap_paramNames, 226
 - getMetadata, 225
 - perturbParams, 225
 - process, 225

- resetParams, 226
- str_description, 226
- skdiscovery::data_structure::table::filters::trend::Trend↔
 - Filter
 - __init__, 229
 - ap_paramNames, 230
 - columns, 230
 - process, 229
- skdiscovery::data_structure::table::filters::weighted_↔
 - average::WeightedAverage
 - __init__, 231
 - __str__, 232
 - ap_paramList, 234
 - ap_paramNames, 234
 - column_names, 234
 - getMetadata, 232
 - perturbParams, 232
 - process, 232
 - propagate_uncertainties, 234
 - resetParams, 234
 - std_dev_column_names, 234
 - str_description, 234
- skdiscovery::data_structure::table::fusion::grace::Grace↔
 - Fusion
 - __init__, 132
 - __str__, 132
 - ap_paramList, 134
 - ap_paramNames, 134
 - column_data_name, 134
 - column_error_name, 134
 - getMetadata, 133
 - gldas, 134
 - metadata, 134
 - perturbParams, 133
 - process, 133
 - resetParams, 134
 - str_description, 135
- skdiscovery::data_structure::table::fusion::snow::Snow↔
 - Fusion
 - __init__, 204
 - __str__, 205
 - ap_paramList, 206
 - ap_paramNames, 206
 - column_data_name, 206
 - getMetadata, 205
 - metadata, 206
 - perturbParams, 205
 - process, 205
 - resetParams, 206
 - str_description, 206
- skdiscovery::data_structure::table::generators::catalog_↔
 - generator::CatalogGenerator
 - __init__, 93
 - background_density, 95
 - dec1, 95
 - dec2, 95
 - inverse_nfw_cumulative, 94
 - nfw_cumulative, 94
 - output, 95
 - ra1, 95
 - ra2, 95
 - z, 96
- skdiscovery::data_structure::table::generators::data_↔
 - generator::DataGenerator
 - __init__, 105
 - args, 106
 - final_function, 106
 - length, 106
 - output, 106
 - seed, 106
- skdiscovery::utilities::cloud::amazon_control
 - amazon_list, 33
 - aws_access_key, 33
 - aws_key_name, 33
 - aws_region, 33
 - aws_secret, 33
 - aws_security_group, 33
 - clearAmazonList, 29
 - close, 29
 - closeDispyScheduler, 29
 - createTunnels, 29
 - ec2_client, 33
 - ec2_res, 34
 - generateInfo, 30
 - goodConnection, 30
 - init, 30
 - pem_file, 34
 - popen, 34
 - reset, 31
 - resetInstances, 31
 - scheduler, 34
 - setNumInstances, 31
 - startDispyNode, 32
 - startDispyScheduler, 32
 - updateIPAddress, 32
 - updateStatus, 32
- skdiscovery::utilities::cloud::amazon_gui
 - changeButtonState, 35
 - checkValidValues, 35
 - disable_list, 36
 - drawGUI, 35
 - init, 35
 - initialized, 36
 - initialized_disabled_list, 36
 - key_value_list, 36
 - widget_dict, 36
- skdiscovery::utilities::cloud::ssh_reverse
 - handler, 37

- print_verbose, 37
- reverse_forward_tunnel, 38
- skdiscovery::utilities::cloud::ssh_reverse::ReverseTunnel
 - __del__, 200
 - __init__, 199
 - check, 201
 - child_threads, 201
 - create_reverse_tunnel, 200
 - event, 201
 - key_filename, 201
 - remote_host, 201
 - remote_port, 201
 - server_address, 201
 - server_port, 202
 - ssh, 202
 - username, 202
 - verbose, 202
- skdiscovery::utilities::patterns::astro_tools
 - abs_mag, 39
 - angular_separation, 40
 - app_mag, 40
 - cdf_dlf, 41
 - dlf, 41
 - inv_cdf_dlf, 42
 - lf, 43
 - move_point, 43
 - nfw, 44
 - v_to_z, 44
 - z_to_v, 45
- skdiscovery::utilities::patterns::kalman_smoother
 - FOGM, 46
 - FitFOGMPParameters, 45
 - IterativeGridSearch, 47
 - KalmanFilter, 47
 - KalmanSmoother, 49
- skdiscovery::utilities::patterns::pbo_tools
 - closed_pipe, 50
 - constant_open_pipe, 51
 - datetimeToNumber, 51
 - dirEigenvectors, 52
 - finite_sphere, 52
 - mogi, 53
 - rising_open_pipe, 54
 - sill, 54
- skdiscovery::utilities::patterns::random_walks
 - gaussian_walk, 55
 - keep_in_bound, 56
 - uniform_walk, 56
- skdiscovery::utilities::patterns::trend_tools
 - getTrend, 57
 - interpNaN, 57
 - medianFilter, 58
 - sinuFits, 58
- skdiscovery::utilities::planetary::map_util
 - calc_slopes, 59
 - global_coords, 60
 - gps_to_pixel, 60
 - sanitize_latlon, 61
 - trim_map, 61
 - wgs84_distance, 62
- skdiscovery::utilities::planetary::map_util::Planet
 - __init__, 183
 - a, 184
 - avg_radius, 185
 - b, 185
 - e_sq, 185
 - equator_1deg, 185
 - get_lateral_dist, 183
 - get_lateral_dist_array, 183
 - get_medial_dist, 184
- skdiscovery::visualization::emd_plot
 - calc_imfs, 64
 - calc_imfs_sum, 64
 - plot_imfs, 65
 - plot_imfs_noise, 65
 - plot_imfs_split, 66
 - plot_imfs_split_comp, 66
 - run_plotImfs, 67
 - run_plotImfsNoise, 68
 - run_plotImfsSplit, 68
 - run_plotImfsSplitComp, 69
 - run_plotImfsSplitNoise, 70
- skdiscovery::visualization::fourier_plot
 - calc_DFT, 71
 - plot_DFT, 71
 - run_plotDFT, 72
- skdiscovery::visualization::linear_decomposition_plot
 - calc_lin_interp, 73
 - lin_trend, 73
 - plot_lin_interp, 74
 - plot_lin_slope, 74
 - plot_lin_trend, 75
- skdiscovery::visualization::multi_ca_plot
 - multiCaPlot, 75
- skdiscovery::visualization::multi_dist
 - calc_distance_map, 76
- skdiscovery::visualization::spherical_voronoi
 - find_match, 77
 - getVoronoiCollection, 78
 - sphericalToXYZ, 79
 - xyzToSpherical, 79
- skdiscovery::visualization::spiral_plot
 - plot_spiral, 80
 - run_spiral, 81
 - run_spiralInteractive, 81
- skdiscovery::visualization::vis_utils
 - block_output, 82
 - coldict, 83

- enable_output, [82](#)
- index_scale, [82](#)
- lin_trend, [82](#)
- mod_data, [83](#)
- types, [83](#)
- skdiscovery::visualization::wavelets_plot
 - calc_wp_deconstruct, [84](#)
 - calc_wp_reconstruct, [84](#)
 - plot_wp_deconstruct, [84](#)
 - plot_wp_reconstruct, [85](#)
 - plot_wp_showall, [85](#)
 - run_plotWPDecon, [85](#)
 - run_plotWPRecon, [85](#)
 - run_plotWPShowall, [86](#)
- slope
 - skdiscovery::data_structure::series::filters::hyperbolictan↔
::HTanFilter, [144](#)
 - skdiscovery::data_structure::table::filters::hyperbolictan↔
::HTanFilter, [140](#)
- snow_column
 - skdiscovery::data_structure::table::filters::snow↔
remover::SnowRemover, [208](#)
- sphericalToXYZ
 - skdiscovery::visualization::spherical_voronoi, [79](#)
- ssh
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
Tunnel, [202](#)
- stage_containers
 - skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, [119](#)
- stageConfigurationHistory
 - skdiscovery::data_structure::framework::discoverypipeline↔
::DiscoveryPipeline, [119](#)
- start
 - skdiscovery::data_structure::series::filters::dataremover↔
::DataRemover, [111](#)
 - skdiscovery::data_structure::series::filters::hyperbolictan↔
::HTanFilter, [144](#)
 - skdiscovery::data_structure::table::filters::dataremover↔
::DataRemover, [109](#)
 - skdiscovery::data_structure::table::filters::hyperbolictan↔
::HTanFilter, [140](#)
- start_date
 - skdiscovery::data_structure::table::filters::resample↔
::Resample, [198](#)
- start_time_limit
 - skdiscovery::data_structure::series::filters::hyperbolictan↔
::HTanFilter, [144](#)
 - skdiscovery::data_structure::table::filters::hyperbolictan↔
::HTanFilter, [140](#)
- startDispyNode
 - skdiscovery::utilities::cloud::amazon_control, [32](#)
- startDispyScheduler
 - skdiscovery::utilities::cloud::amazon_control, [32](#)
- std_dev_column_names
 - skdiscovery::data_structure::table::filters::weighted↔
_average::WeightedAverage, [234](#)
- str_description
 - skdiscovery::data_structure::framework::base::↔
PipelineItem, [182](#)
 - skdiscovery::data_structure::series::analysis::gca::↔
General_Component_Analysis, [121](#)
 - skdiscovery::data_structure::table::analysis::gca::↔
General_Component_Analysis, [124](#)
 - skdiscovery::data_structure::table::analysis::midas↔
::MIDAS, [162](#)
 - skdiscovery::data_structure::table::filters::calibrate↔
_grace::CalibrateGRACE, [92](#)
 - skdiscovery::data_structure::table::filters::combine↔
_columns::CombineColumns, [99](#)
 - skdiscovery::data_structure::table::filters::geolocation↔
::GeoLocationFilter, [127](#)
 - skdiscovery::data_structure::table::filters::propagate↔
_nans::PropagateNaNs, [195](#)
 - skdiscovery::data_structure::table::filters::resample↔
::Resample, [198](#)
 - skdiscovery::data_structure::table::filters::stabilization↔
::StabilizationFilter, [211](#)
 - skdiscovery::data_structure::table::filters::table↔
filter::TableFilter, [226](#)
 - skdiscovery::data_structure::table::filters::weighted↔
_average::WeightedAverage, [234](#)
 - skdiscovery::data_structure::table::fusion::grace::↔
GraceFusion, [135](#)
 - skdiscovery::data_structure::table::fusion::snow::↔
SnowFusion, [206](#)
- subtract
 - skdiscovery::data_structure::series::filters::median↔
::MedianFilter, [156](#)
 - skdiscovery::data_structure::table::filters::median::↔
MedianFilter, [159](#)
- target_columns
 - skdiscovery::data_structure::table::filters::propagate↔
_nans::PropagateNaNs, [195](#)
- time_interval
 - skdiscovery::data_structure::series::filters::offset↔
detrend::OffsetDetrend, [174](#)
 - skdiscovery::data_structure::table::filters::offset↔
detrend::OffsetDetrend, [176](#)
- time_point
 - skdiscovery::data_structure::series::filters::offset↔
detrend::OffsetDetrend, [174](#)

- skdiscovery::data_structure::table::filters::offset_↔
detrend::OffsetDetrend, 176
- trim_map
 - skdiscovery::utilities::planetary::map_util, 61
- types
 - skdiscovery::visualization::vis_utils, 83
- uncertainty_clip
 - skdiscovery::data_structure::series::filters::kalman↔
::KalmanFilter, 148
 - skdiscovery::data_structure::table::filters::kalman::↔
KalmanFilter, 151
- uniform_walk
 - skdiscovery::utilities::patterns::random_walks, 56
- updateIPAddress
 - skdiscovery::utilities::cloud::amazon_control, 32
- updateStatus
 - skdiscovery::utilities::cloud::amazon_control, 32
- username
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
Tunnel, 202
- utilities/cloud/amazon_control.py, 250
- utilities/cloud/amazon_gui.py, 251
- utilities/cloud/ssh_reverse.py, 251
- utilities/patterns/astro_tools.py, 252
- utilities/patterns/kalman_smoother.py, 253
- utilities/patterns/pbo_tools.py, 253
- utilities/patterns/random_walks.py, 254
- utilities/patterns/trend_tools.py, 254
- utilities/planetary/map_util.py, 254
- v_to_z
 - skdiscovery::utilities::patterns::astro_tools, 44
- verbose
 - skdiscovery::utilities::cloud::ssh_reverse::Reverse↔
Tunnel, 202
- visualization/emd_plot.py, 255
- visualization/fourier_plot.py, 256
- visualization/linear_decomposition_plot.py, 256
- visualization/multi_ca_plot.py, 257
- visualization/multi_dist.py, 257
- visualization/spherical_voronoi.py, 257
- visualization/spiral_plot.py, 258
- visualization/vis_utils.py, 258
- visualization/wavelets_plot.py, 259
- wgs84_distance
 - skdiscovery::utilities::planetary::map_util, 62
- widget_dict
 - skdiscovery::utilities::cloud::amazon_gui, 36
- width
 - skdiscovery::data_structure::series::accumulators↔
::plotter::Plotter, 187
 - skdiscovery::data_structure::table::accumulators↔
::plotter::Plotter, 191
- writeConfigValue
 - skdiscovery::data_structure::framework::config, 15
- xlim
 - skdiscovery::data_structure::table::accumulators↔
::plotter::Plotter, 191
- xyzToSpherical
 - skdiscovery::visualization::spherical_voronoi, 79
- ylim
 - skdiscovery::data_structure::table::accumulators↔
::plotter::Plotter, 191
- z
 - skdiscovery::data_structure::table::generators↔
::catalog_generator::CatalogGenerator, 96
- z_to_v
 - skdiscovery::utilities::patterns::astro_tools, 45